

Modular Electric Actuators OSP-E

ORIGA SYSTEM PLUS

aerospace
climate control
electromechanical
filtration
fluid & gas handling
hydraulics
pneumatics
process control
sealing & shielding



ENGINEERING YOUR SUCCESS.



Contents

Modular Electric Actuators



OSP Concept

Origa System Plus

	Page
Electric Actuator OSP-E, Modular Components - Overview	4
Applications for OSP-E Actuators	8

Belt Actuator

OSP-E..BHD, Belt Actuator with Integrated Guide	11
— Ball Bearing Guide	15
— Roller Guide	20
OSP-E..BV, Vertical Belt Actuator with Integrated Ball Bearing Guide	27
OSP-E..B, Belt Actuator with Internal Plain Bearing Guide	39

Screw Actuator

OSP-E..SB, Ball Screw Actuator with Internal Plain Bearing Guide	53
OSP-E..ST, Trapezoidal Screw Actuator with Internal Plain Bearing Guide	67
OSP-E..SBR, Ball Screw Aktuator with Internal Plain Bearing Guide and Piston Rod	79
OSP-E..STR, Trapezoidal Screw Actuator with Internal Plain Bearing Guide and Piston Rod	89

Linear Guides

SLIDELINE - Plain Bearing Guide	101
POWERSLIDE - Roller Guide	103
PROLINE - Aluminium Roller Guide	107
HD - Heavy-duty Guide	111

Gears

PS/RS - Planetary / Angular Gears	115
-----------------------------------	-----

Motor and Drives

EasyDrive Packages	121
--------------------	-----

Accessories

Motor Mounting	133
End Cap Mounting	141
Profile Mounting	147
Compensation	155
Guide Mounting	161
Magnetic Sensors	165
Measuring System - SFI-plus	171
Cable Cover	175

Multi Axis Connections

Overview	178
Adapter Plate	181
Intermediate Drive Shaft	190

The right to introduce technical modifications is reserved

ORIGA SYSTEM PLUS

- ONE CONCEPT
- THREE ACTUATOR OPTIONS

Based on the concept of the rodless pneumatic cylinder, well proven worldwide, Parker Origa now offers the complete solution for actuator systems.

Developed for absolute reliability, high performance, easy handling and optimized design, ORIGA SYSTEM PLUS can master even the most difficult installation requirements.

ORIGA SYSTEM PLUS

is a completely modular concept, enabling pneumatic and electric actuators to be combined with guides and control modules for all kinds of applications.

The main system carriers are the actuators themselves, consisting of extruded aluminium profiles with double dovetail slots on three sides,

providing direct mounting for all modular options.



MODULAR SYSTEM

• Electric Belt Actuator

– For applications with higher speeds and precise movement and positioning for longer travel.

• Electric Screw Actuator

– For higher actuator power and precise movement and positioning.

• Pneumatic Actuator

– For a wide variety of applications with simple handling, combined with simple control possibilities and a broad power spectrum.

– Ideal for fast, repetitive movements and simple positioning duties.

For further information see the Pneumatic Actuators Catalogue A4P011E.

- 18 additional guide variants provide any required precision, performance and load capacity.

- Compact solutions, easy to install and simple to retrofit.

- Valves and control elements can be mounted directly on the pneumatic actuator.

























- A wide range of mounting options provides great installation flexibility.

ORIGA SYSTEM PLUS

– ONE CONCEPT

– THREE ACTUATOR OPTIONS

* Information on Pneumatic Actuators, see Catalogue P-A4 P011E

<p>Basic Actuator – Standard Version</p> <ul style="list-style-type: none"> ● Series OSP-P* ● Series OSP-E Belt with internal Plain Bearing Guide Belt with integrated Guide Vertical Belt with integrated Guide ● Series OSP-E Ball screw with internal Plain Bearing Guide, Trapezoidal Screw with internal Plain Bearing Guide 		<p>Multi-Axis Systems Connecting elements</p> <ul style="list-style-type: none"> ● Adapter Plates ● Intermediate Drive Shafts 	
<p>Air Connection on the End-face or both at One End</p> <ul style="list-style-type: none"> ● Series OSP-P* 		<p>Duplex-Connection</p> <ul style="list-style-type: none"> ● Series OSP-P* 	
<p>Clean Room Cylinders certified to DIN EN ISO 146644-1</p> <ul style="list-style-type: none"> ● Series OSP-P* ● Series OSP-E..SB 		<p>Multiplex-Connection</p> <ul style="list-style-type: none"> ● Series OSP-P* 	
<p>Products in ATEX-Version</p> <ul style="list-style-type: none"> ● Series OSP-P* Rodless Cylinders 		<p>Linear Guides – SLIDELINE</p> <ul style="list-style-type: none"> ● Series OSP-P* ● Series OSP-E Screw 	
<p>Products in ATEX-Version</p> <ul style="list-style-type: none"> ● Series OSP-P* Rodless Cylinders with plain bearing SLIDELINE 		<p>Linear Guides – POWERSLIDE</p> <ul style="list-style-type: none"> ● Series OSP-P* ● Series OSP-E Belt ● Series OSP-E Screw 	
<p>Cylinders for synchronized counter-rotation of the cylinders</p> <ul style="list-style-type: none"> ● Series OSP-P* 		<p>Linear Guides – PROLINE</p> <ul style="list-style-type: none"> ● Series OSP-P* ● Series OSP-E Belt ● Series OSP-E Screw 	
<p>Integrated 3/2-Way Valves</p> <ul style="list-style-type: none"> ● Series OSP-P* 		<p>Linear Guides – STARLINE</p> <ul style="list-style-type: none"> ● Series OSP-P* 	
<p>Compensation</p> <ul style="list-style-type: none"> ● Series OSP-P* ● Series OSP-E Belt ● Series OSP-E Screw 		<p>Linear Guides – KF</p> <ul style="list-style-type: none"> ● Series OSP-P* 	
<p>End Cap Mounting</p> <ul style="list-style-type: none"> ● Series OSP-P* ● Series OSP-E Belt ● Series OSP-E Screw 		<p>Heavy Duty-Guides – HD</p> <ul style="list-style-type: none"> ● Series OSP-P* ● Series OSP-E Screw 	
<p>Profile Mounting</p> <ul style="list-style-type: none"> ● Series OSP-P* ● Series OSP-E Belt ● Series OSP-E Screw 		<p>Brakes</p> <ul style="list-style-type: none"> ● Active Brakes* ● Passive Brakes* 	
<p>Inversion Mounting</p> <ul style="list-style-type: none"> ● Series OSP-P* ● Series OSP-E Belt ● Series OSP-E Screw 		<p>Planetary gears PV</p> <ul style="list-style-type: none"> ● Series OSP-E Belt ● Series OSP-E Screw 	
		<p>Magnetic Switches</p> <ul style="list-style-type: none"> ● Series OSP-P* ● Series OSP-E Belt ● Series OSP-E Screw 	
		<p>SFI-Plus Displacement Measuring Systems</p> <ul style="list-style-type: none"> ● Series OSP-P* ● Series OSP-E Screw 	

Electric Actuator OSP-E, Modular Components - Overview

Actuators	OSP-E20 -BHD ¹⁾	OSP-E25 -BHD ^{1), 2)}	OSP-E32 -BHD ^{1), 2)}	OSP-E50 -BHD ^{1), 2)}	OSP-E20 -BV ³⁾	OSP-E25 -BV ³⁾	OSP-E25 -B ⁴⁾	OSP-E32 -B ⁴⁾	OSP-E50 -B ⁴⁾
Effective action force F _A [N]	450 - 550	550 - 1070	1030 - 1870	1940 - 3120	450 - 650	1050 - 1490	50	100 - 150	300 - 425
Max. Velocity v [m/s]	3.0	10.0 / 5	10.0 / 5	10.0 / 5	3.0	5.0	2.0	3.0	5.0
Integrated Magnets	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	–	–	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Free choice of stroke length [mm] **	1 - 5760	1 - 7000	1 - 7000	1 - 7000	1 - 1000	1 - 1500	1 - 3000	1 - 5000	1 - 5000
Temperature range [°C]	-30 – +80	-30 – +80	-30 – +80	-30 – +80	-30 – +80	-30 – +80	-30 – +80	-30 – +80	-30 – +80
Tandem Version	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Bi-parting Version	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	–	–	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Stainless steel parts	X	X	X	X	X	X	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Integrated planetary gearbox LPB***	–	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	–	–	–	–	–
Self-Guidance									
F [N]	1600	3000 / 986	10000 / 1348	15000 / 3704	1600	3000	160	300	850
Mx [Nm]	21	50 / 11	120 / 19	180 / 87	20	50	2	8	16
My [Nm]	150	500 / 64	1000 / 115	1800 / 365	100	200	12	25	80
Mz [Nm]	150	500 / 64	1400 / 115	2500 / 365	100	200	8	16	32
Slideline									
F [N]	–	–	–	–	–	–	–	–	–
Mx [Nm]	–	–	–	–	–	–	–	–	–
My [Nm]	–	–	–	–	–	–	–	–	–
Mz [Nm]	–	–	–	–	–	–	–	–	–
Proline									
F [N]	–	–	–	–	–	–	986	1348	3582
Mx [Nm]	–	–	–	–	–	–	19	33	128
My [Nm]	–	–	–	–	–	–	44	84	287
Mz [Nm]	–	–	–	–	–	–	44	84	287
Powerslide									
F [N]	–	–	–	–	–	–	910 - 1190	1400 - 2300	3000 - 4000
Mx [Nm]	–	–	–	–	–	–	14 - 20	20 - 50	90 - 140
My [Nm]	–	–	–	–	–	–	63 - 175	70 - 175	250 - 350
Mz [Nm]	–	–	–	–	–	–	63 - 175	70 - 175	250 - 350
HD-Guide (Heavy Duty)									
F [N]	–	–	–	–	–	–	–	–	–
Mx [Nm]	–	–	–	–	–	–	–	–	–
My [Nm]	–	–	–	–	–	–	–	–	–
Mz [Nm]	–	–	–	–	–	–	–	–	–
Accessories									
Multi-Axis System									
Connecting elements	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Connecting shaft	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Special Actuators									
Clean Room	X	X	X	X	X	X	X	X	X
Gearbox									
Planetary gears	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Mountings									
Compensation	X	X	X	X	X	X	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
End Cap Mounting / Midsection Support	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	X	X	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Inversion Mounting	X	X	X	X	X	X	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Adapter Profile / T-Nut Profile	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	X	X	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Magnetic switches									
Reed Switches RS (NO, NC)	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Electronic Switches ES (PNP, NPN)	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Measuring systems									
SFI-plus Displacement Measuring System	X	X	X	X	X	X	X	X	X
Motor package (stepper / servo)									
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

= Standard version
 = Option
X = Currently not available
* = other temperature ranges on request
** = **exc. safety clearance from mechanical end position**
other stroke lengths on request
*** = ratio i = 3, 5, 10

¹⁾ = Actuator with Belt and Integrated Ball Bearing Guide
²⁾ = Actuator with Belt and Integrated Roller Guide
³⁾ = Vertical Actuator with Belt and Integrated Ball Bearing Guide
⁴⁾ = Actuator with Belt and Internal Plain Bearing Guide
⁵⁾ = Actuator with Ball Screw Actuator and Internal Plain Bearing Guide
⁶⁾ = Actuator with Trapezoidal Screw Actuator and Internal Plain Bearing Guide
⁷⁾ = Actuator with Ball Screw Actuator, Internal Plain Bearing Guide and Piston Rod
⁸⁾ = Actuator with Trapezoidal Screw Actuator, Internal Plain Bearing Guide and Piston Rod

	OSP-E25 -SB ⁵⁾	OSP-E32 -SB ⁵⁾	OSP-E50 -SB ⁵⁾	OSP-E25 -ST ⁶⁾	OSP-E32 -ST ⁶⁾	OSP-E50 -ST ⁶⁾	OSP-E25 -SBR ⁷⁾	OSP-E32 -SBR ⁷⁾	OSP-E50 -SBR ⁷⁾	OSP-E25 -STR ⁸⁾	OSP-E32 -STR ⁸⁾	OSP-E50 -STR ⁸⁾
250	600	1500	600	1300	2500	260	900	1200	800	1600	3300	
0.25	0.5	1.25	0.1	0.1	0.15	0.25	0.5	1.25	0.075	0.1	0.125	
□	□	□	□	□	□	□	□	□	□	□	□	
1 - 1100	1 - 2000	1 - 3200	1 - 1100	1 - 2000	1 - 2500	1 - 500	1 - 500	1 - 500	1 - 500	1 - 500	1 - 500	
-20 - +80	-20 - +80	-20 - +80	-20 - +70	-20 - +70	-20 - +70	-20 - +80	-20 - +80	-20 - +80	-20 - +70	-20 - +70	-20 - +70	
O	O	O	O	O	O	-	-	-	-	-	-	
X	X	X	X	X	X	X	X	X	X	X	X	
-	-	-	-	-	-	-	-	-	-	-	-	
500	1200	3000	500	1000	1500	-	-	-	-	-	-	
2	8	16	2	6	13	-	-	-	-	-	-	
12	25	80	24	65	155	-	-	-	-	-	-	
8	16	32	7	12	26	-	-	-	-	-	-	
675	925	2000	675	925	2000	-	-	-	-	-	-	
14	29	77	14	29	77	-	-	-	-	-	-	
34	60	180	34	60	180	-	-	-	-	-	-	
34	60	180	34	60	180	-	-	-	-	-	-	
986	1348	3582	986	1348	3582	-	-	-	-	-	-	
19	33	128	19	33	128	-	-	-	-	-	-	
44	84	287	44	84	287	-	-	-	-	-	-	
44	84	287	44	84	287	-	-	-	-	-	-	
910-1190	1400-2300	3000-4000	900-1190	1400-2300	3000-4000	-	-	-	-	-	-	
14-20	20-50	90-140	14-20	20-50	90-140	-	-	-	-	-	-	
63-175	70-175	250-350	63-175	70-175	250-350	-	-	-	-	-	-	
63-175	70-175	250-350	63-175	70-175	250-350	-	-	-	-	-	-	
6000	6000	18000	6000	6000	18000	-	-	-	-	-	-	
260	285	1100	260	285	1100	-	-	-	-	-	-	
320	475	1400	320	475	1400	-	-	-	-	-	-	
320	475	1400	320	475	1400	-	-	-	-	-	-	
O	O	O	O	O	O	O	O	O	O	O	O	
O	O	O	O	O	O	O	O	O	O	O	O	
O	O	O	X	X	X	X	X	X	X	X	X	
O	O	O	O	O	O	O	O	O	O	O	O	
O	O	O	O	O	O	-	-	-	-	-	-	
O	O	O	O	O	O	O	O	O	O	O	O	
O	O	O	O	O	O	-	-	-	-	-	-	
O	O	O	O	O	O	O	O	O	O	O	O	
O	O	O	O	O	O	O	O	O	O	O	O	
O	O	O	O	O	O	O	O	O	O	O	O	
O	O	O	O	O	O	-	-	-	-	-	-	
O	O	O	O	O	O	O	O	O	O	O	O	

ONE COMPLETE SYSTEM

– SEVEN ACTUATOR OPTIONS
FOR ALL POSSIBLE APPLICATIONS

Series OSP-E..BHD
Belt Actuator with integrated Guide
– Ball Bearing Guide
– Roller Guide



Series OSP-E..BV
Vertical Belt Actuator with integrated
Ball Bearing Guide



Series OSP-E..B
Belt Actuator with Internal Guide



Series OSP-E..SB
Ball Screw Actuator with internal
Plain Bearing Guide



Series OSP-E..ST
Trapezoidal Screw Actuator with
Internal Plain Bearing Guide














Series OSP-E..SBR
Ball Screw Actuator with internal Plain Bearing
Guide and Piston Rod



Series OSP-E..STR
Trapezoidal Screw actuator with Internal
Plain Bearing Guide and Piston Rod




STANDARD VERSIONS, OPTIONS AND ACCESSORIES

Description		Belt-Actuators – Basic Versions		
	Belt Actuator with integrated Guide 	Vertical Belt Actuator with integrated Ball Bearing Guide 	Belt Actuator with internal Plain Bearing Guide 	
Standard Versions	 – Direction of motion – Position of the drive shaft	– Position of the drive shaft	 – Position of the drive shaft	
Options	– Tandem – Bi-directional – Integrated Planetary Gearbox	– Tandem	– Tandem – Bi-directional – Niro	
Mountings				
Compensation	–	–	0	
End Cap Mounting	0	–	0	
Profile Mounting	0	–	0	
Inversion Mounting	–	–	0	
Accessories				
Magnetic Switches	0	0	0	
Motor Mountings	0	0	0	
Linear Guides	–	–	0	
Multi-Axis Connection System	0	0	0	
Description		Screw-Actuators – Basic Versions		
	Ball Screw Actuator with internal Plain Bearing Guide 	Trapezoidal Screw Actuator with internal Plain Bearing Guide 	Screw Actuator with internal Plain Bearing Guide and Piston Rod – Ball Screw – Trapezoidal Screw 	
Standard Versions	 – Spindle pitch of the ball screws			
Options	– Clean room version – Displacement Measuring System SFI-plus	– Displacement Measuring System SFI-plus		
Mountings				
Compensation	0	0	–	
End Cap Mounting	0	0	0	
Profile Mounting	0	0	0	
Inversion Mounting	0	0	–	
Accessories				
Magnetic Switches	0	0	0	
Motor Mounting	0	0	0	
Flansh Mounting	–	–	0	
Trunnion Mounting	–	–	0	
Piston Rod Knuckle	–	–	0	
Linear Guides	0	0	–	
Multi-Axis Connection System	0	0	0	

APPLICATIONS FOR OSP-E ACTUATORS

Auto Handling

– high speed pick and place movements

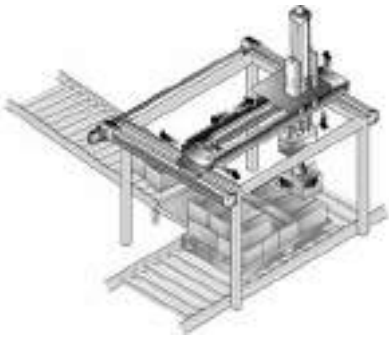

Material Handling Systems

– vertical and horizontal transfer movements




Punching Machines

– accurate feeding and positioning




Mechanical Handling

– parallel operation of actuators on a vertical handling system

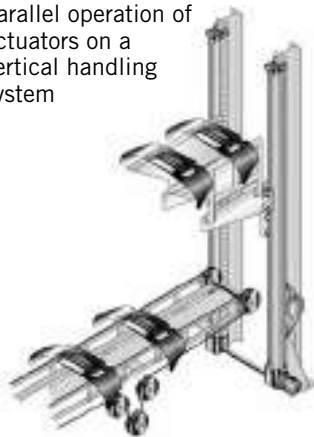

Profile Cutting Machines

– intricate profile movements of water jets and lasers

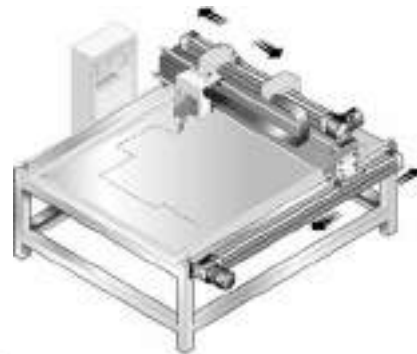

Slitting Machines

– high speed traverse applications for the slicing of papers and textiles




Spray Coating

– synchronized high speed bi-parting movements



Automated Filling Machines

– accurate 3-axis positioning

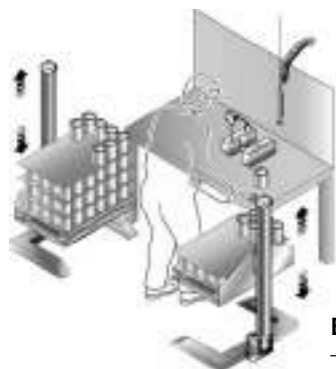

Ergonomic Workstations

– adjustment of working levels




Automatic Doors and Guards

– simple bi-parting operation


Robotic Installations

– traverse of robots between work stations

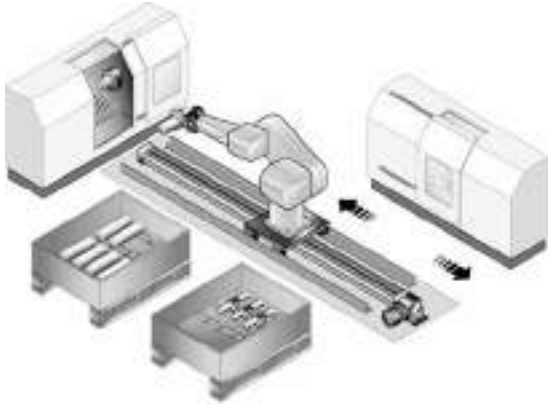


Milling Machines

– precise slow speed feeding in 2-axis

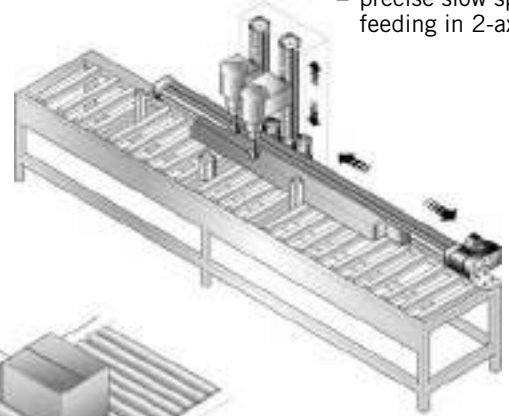

Conveyor Systems

– simple cross-transfer actuators

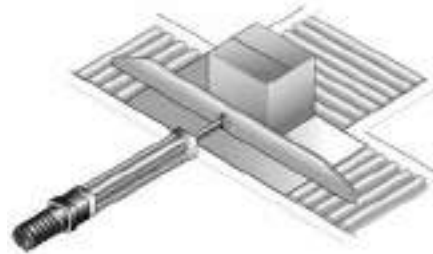

Spraying Equipment

– precision reciprocating action



Measuring Systems

– optical curvature gauging using synchronised bi-parting actuation



Ventilation Systems

– adjustment of air dampers




Mobile Lifting Systems

– lifting devices for industrial safety




Medical equipments

– adjustment of orthopaedic beds

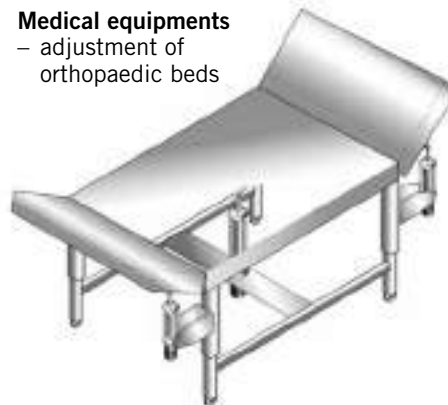

Conveyor Systems

– centring of packages on conveyor lines

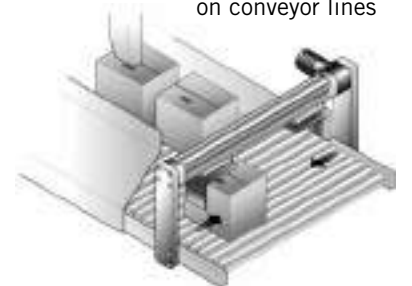

OSP-E..BHD

Belt Actuator with Integrated Guide

- Ball Bearing Guide
- Roller Guide



Contents

Description	Page
Overview	12
Version with Ball Bearing Guide	
Technical Data	15
Dimensions	18
Order Instructions	24
Version with Roller Guide	
Technical Data	20
Dimensions	23
Order Instructions	24

The right to introduce technical modifications is reserved

BELT ACTUATOR WITH INTEGRATED GUIDE FOR HEAVY DUTY APPLICATIONS

The latest generation of high capacity actuators, the OSP-E..BHD series combines robustness, precision and high performance. The aesthetic design is easily integrated into any machine constructions by virtue of extremely adaptable mountings.

Belt Actuator with Integrated Guide - selective with Ball Bearing Guide or Roller Guide

Advantages:

- Accurate path and position control
- High force output
- High speed operation
- High load capacity
- Easy installation
- Low maintenance
- Ideal for multi-axis applications


Features:

- Integrated ball bearing guide or integrated roller guide
- Diverse range of multi-axis connection elements
- Diverse range of accessories and mountings
- Complete motor and control packages
- Optional integrated planetary gearbox
- Special options on request


Take the easy route and load all the dimensions into your system. The file is suitable for all current CAD systems – available on CD-Rom or at www.parker-origa.com




Version with Intergrated
Ball Bearing Guide

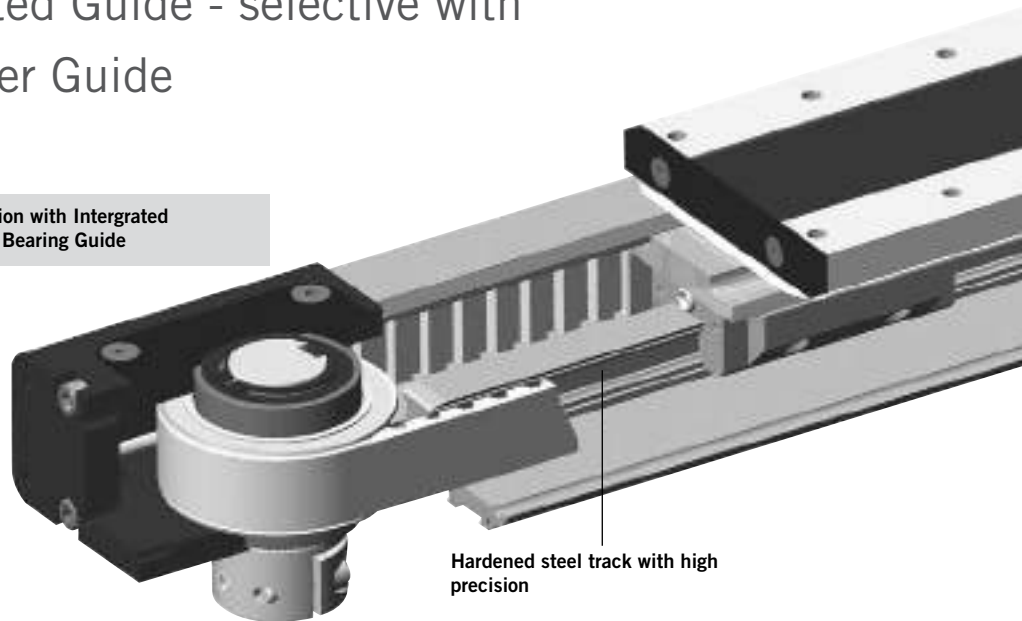



Version with
Integrated Roller Guide

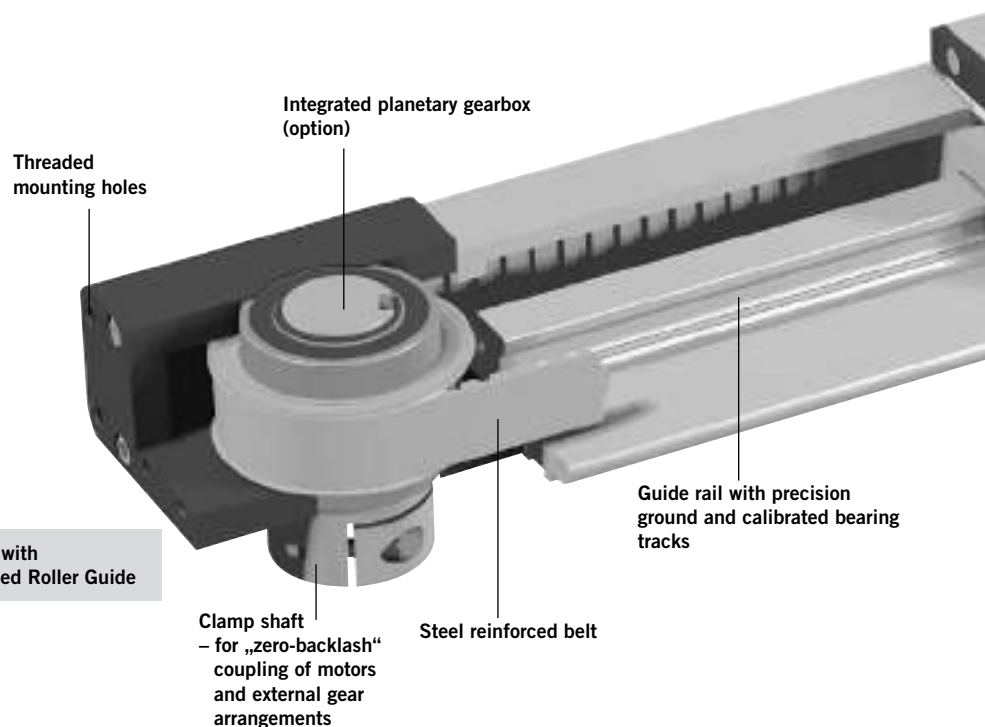

Drive Shaft Versions

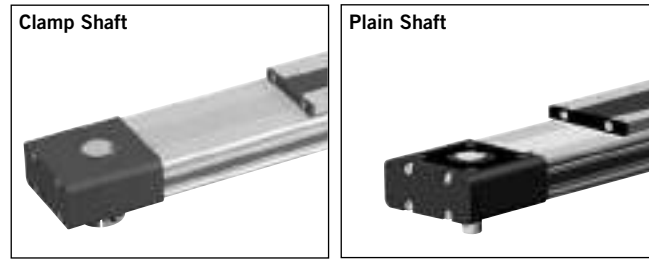


Drive Shaft OPTIONS



**OPTION
Integrated planetary gearbox**



- Highly compact and rigid solution fully integrated in the drive cap housing
- Purpose designed for the BHD series
- Available with three standard ratios (3, 5 and 10)
- Very low backlash
- A wide range of available motor flanges

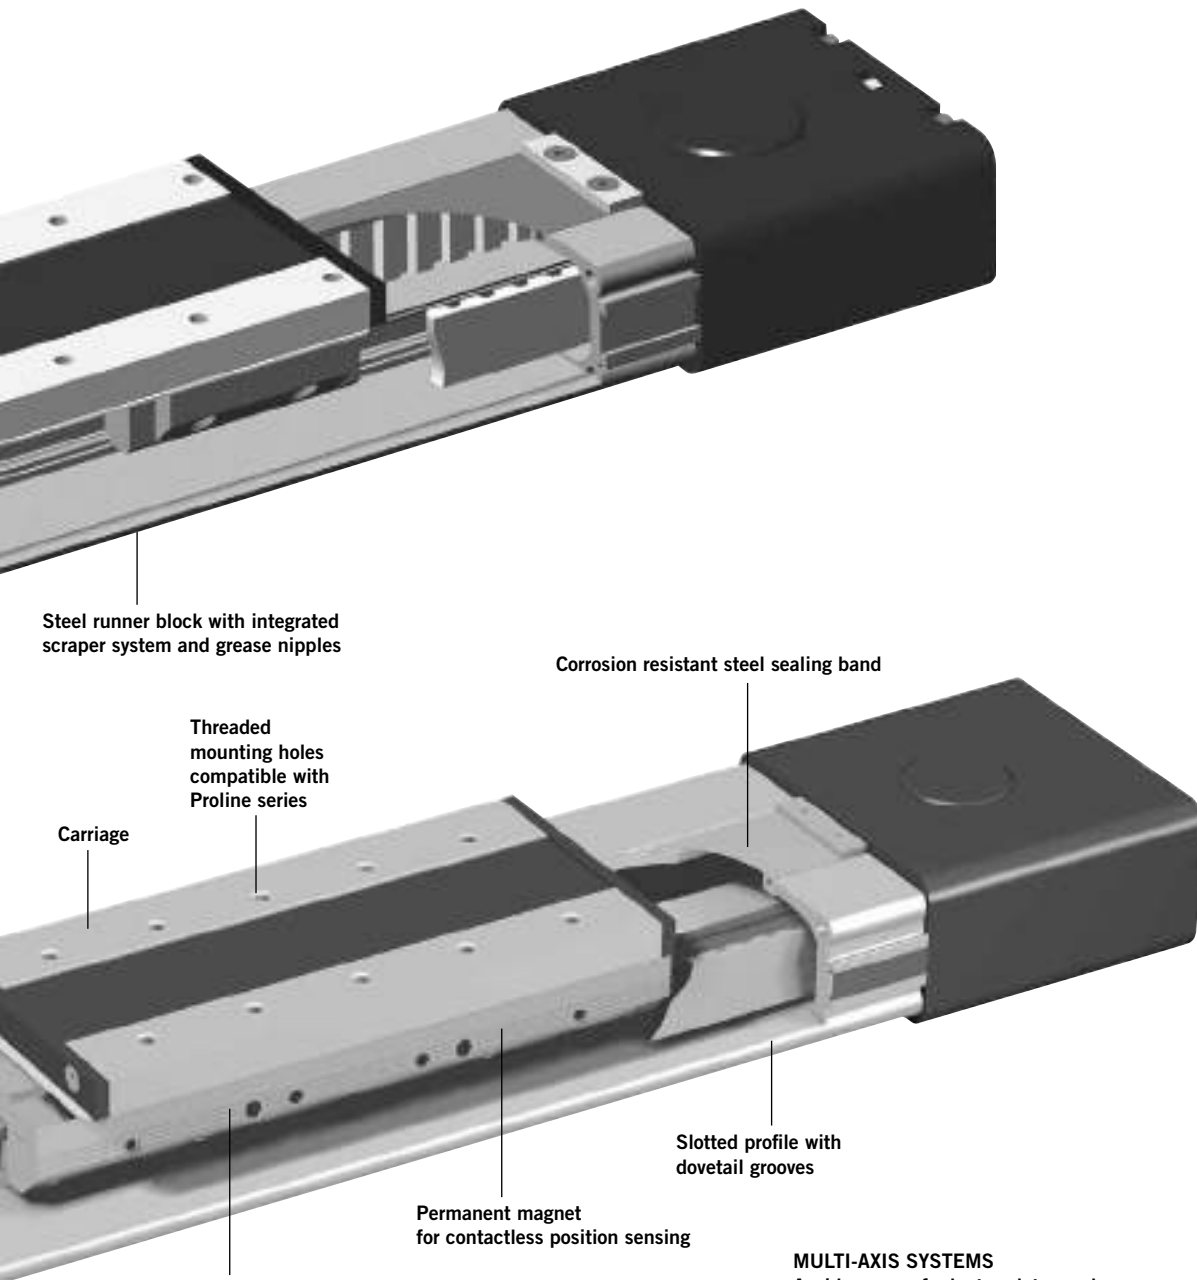

Steel runner block with integrated scraper system and grease nipples

Corrosion resistant steel sealing band

Threaded mounting holes compatible with Proline series

Carriage

Slotted profile with dovetail grooves


Permanent magnet for contactless position sensing

Rollers on needle bearings for smooth operation up to 10 m/s.

BI-PARTING Version
for perfectly synchronised bi-parting movements.




MULTI-AXIS SYSTEMS
A wide range of adapter plates and intermediate drive shafts simplify engineering and installation




The dovetailed mounting rails of the new linear actuator expand its function into that of a universal system carrier. Modular system components are simply clamped on

Version with Integrated Ball Bearing Guide



Version with Integrated Roller guide




OPTIONS AND ACCESSORIES

OSP-E..BHD BELT ACTUATOR WITH INTEGRATED GUIDE

STANDARD VERSIONS OSP-E..BHD

Standard carrier with integrated guide and magnets for contactless position sensing. Dovetail profile for mounting of accessories and the actuator itself.



DRIVE SHAFT WITH CLAMP SHAFT




DRIVE SHAFT WITH PLAIN SHAFT



ACTUATING DIRECTION

Important in parallel operations, e.g. with intermediate drive shaft



Standard

Standard –
Bi-Parting
Version

OPTIONS

TANDEM

For higher moment support.



BI-PARTING VERSION

For perfectly synchronised bi-parting movements.



DRIVE SHAFT WITH CLAMP SHAFT AND PLAIN SHAFT

For connections with intermediate drive shaft



HOLLOW SHAFT WITH KEYWAY

For close coupling of motors and external gears.



INTEGRATED PLANETARY GEARBOX

For compact installation and very low backlash.



ACCESSORIES

MOTOR MOUNTINGS




END CAP MOUNTING

For mounting the actuators on the end cap.




PROFILE MOUNTING

For supporting long actuators or mounting the actuators on dovetail grooves.




MAGNETIC SWITCHES TYPE RS AND ES

For contactless position sensing of end stop and intermediate carrier positions.



MULTI-AXIS SYSTEMS

For modular assembly of actuators up to multi-axis systems.

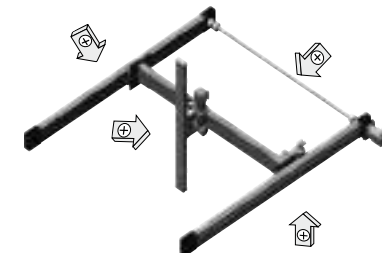

OSP-E..BHD

Belt Actuator with integrated Ball Bearing Guide

Size 20 to 50



Characteristics			
Characteristics		Symbol	Unit Description
General Features			
Series			OSP-E..BHD
Name			Belt Actuator with integrated Ball Bearing Guide
Mounting			See drawings
Ambient-Temperature range	ϑ_{\min} ϑ_{\max}	°C °C	-30 +80
Weight (mass)		kg	See table
Installation			In any position
Material	Slotted profile		Extruded anodized aluminium
	Belt		Steel-corded polyurethane
	Pulley		Aluminium
	Guide		Ball Bearing Guide
	Guide rail		Hardened steel rail with high precision, accuracy class N
	Guide carrier		Steel carrier with integrated wiper system, grease nipples, preloaded 0.02 x C, accuracy class H
	Sealing band		Hardened, corrosion resistant steel
	Screws, nuts		Zinc plated steel
	Mountings		Zinc plated steel and aluminium
Encapsulation class		IP	54

Weight (mass) and Inertia						
Series	Weight (mass)[kg]			Inertia [x 10 ⁻⁶ kgm ²]		
	At stroke 0 m	Add per metre stroke	Moving mass	At stroke 0 m	Add per metre stroke	per kg mass
OSP-E20BHD	2.8	4	0.8	280	41	413
OSP-E25BHD	4.3	4.5	1.5	1229	227	821
OSP-E32BHD	8.8	7.8	2.6	3945	496	1459
OSP-E50BHD	26	17	7.8	25678	1738	3103
OSP-E20BHD*	4.3	4	1.5	540	41	413
OSP-E25BHD*	6.7	4.5	2.8	2353	227	821
OSP-E32BHD*	13.5	7.8	5.2	7733	496	1459
OSP-E50BHD*	40	17	15	49180	1738	3103

* Version: Tandem and Bi-parting (Option)

Installation Instructions

Use the threaded holes in the end cap for mounting the actuator. Check if profile mountings are needed using the maximum allowable unsupported length graph on page 17. At least one end cap must be secured to prevent axial sliding when profile mountings are used.

Maintenance

Depending on operating conditions, inspection of the actuator is recommended after 12 months or 3000 km operation. Please refer to the operating instructions supplied with the actuator.

First service start-up

The maximum values specified in the technical data sheet for the different products must not be exceeded. Before taking the actuator as a machine into service, the user must ensure the adherence to the EC Machine Directive 2006/42/EG.



Standard Versions

- Belt Actuator with integrated Ball Bearing Guide
- Drive shaft with clamp shaft or plain shaft
- Choice of motor mounting side
- Dovetail profile for mounting of accessories and the actuator itself

Options

- Tandem version for higher moments
- Bi-parting version for synchronised movements
- Integrated planetary gearbox
- Drive shaft with
 - clamp shaft and plain shaft
 - hollow shaft with keyway
- Special drive shaft versions on request

Sizing Performance Overview

Maximum Loadings

Sizing of Actuator

The following steps are recommended:

1. Determination of the lever arm length l_x , l_y and l_z from m_e to the centre axis of the actuator.

2. Calculation of the load F_x or F_y to the carrier caused by m_e
 $F = m_e \cdot g$

3. Calculation of the static and dynamic force F_A which must be transmitted by the belt.

$$F_{A(\text{horizontal})} = F_a + F_0 = m_g \cdot a + M_0 \cdot 2\pi / U_{ZR}$$

$$F_{A(\text{vertical})} = F_g + F_a + F_0 = m_g \cdot g + m_g \cdot a + M_0 \cdot 2\pi / U_{ZR}$$

4. Calculation of all static and dynamic moments M_x , M_y and M_z which occur in the application.
 $M = F \cdot l$

5. Selection of maximum permissible loads via Table T3.

6. Calculation and checking of the combined load, which must not be higher than 1.

7. Checking of the maximum torque that occurs at the drive shaft in Table T2.

8. Checking of the required action force F_A with the permissible load value from Table T1.

For motor sizing, the effective torque must be determined, taking into account the cycle time.

Legend

l = distance of a mass in the x-, y- and z-direction from the guide [m]

m_e = external moved mass [kg]

m_{LA} = moved mass of actuator [kg]

m_g = total moved mass ($m_e + m_{LA}$) [kg]

F_{xy} = load exerted on the carrier in dependence of the installation position [N]

F_A = action force [N]

M_0 = no-load torque [Nm]

U_{ZR} = circumference of the pulley (linear movement per revolution) [m]

g = gravity [m/s²]

a_{max} = maximum acceleration [m/s²]

Performance Overview						T1
Characteristics	Unit	Description				
Series		OSP-E20BHD	OSP-E25BHD	OSP-E32BHD	OSP-E50BHD	
Max. speed	[m/s]	3 ¹⁾	5 ¹⁾	5 ¹⁾	5 ¹⁾	
Linear motion per revolution of drive shaft	[mm]	125	180	240	350	
Max. rpm on drive shaft	[min ⁻¹]	2000	1700	1250	860	
Max. effective	< 1 m/s:	[N]	550	1070	1870	3120
Action force	1-3 m/s:	[N]	450	890	1560	2660
F_A at speed	> 3 m/s:	[N]	–	550	1030	1940
No-load torque	[Nm]	0.6	1.2	2.2	3.2	
Max. acceleration/deceleration	[m/s ²]	50	50	50	50	
Repeatability	[mm/m]	±0.05	±0.05	±0.05	±0.05	
Max. standard stroke length	[mm]	5760 ²⁾	5700 ²⁾	5600 ²⁾	5500 ²⁾	

¹⁾ up to 10 m/s on request

²⁾ longer strokes on request

Maximum Permissible Torque on Drive Shaft																T2
OSP-E20BHD				OSP-E25BHD				OSP-E32BHD				OSP-E50BHD				
Speed [m/s]	Torque [Nm]	Stroke [m]	Torque [Nm]	Speed [m/s]	Torque [Nm]	Stroke [m]	Torque [Nm]	Speed [m/s]	Torque [Nm]	Stroke [m]	Torque [Nm]	Speed [m/s]	Torque [Nm]	Stroke [m]	Torque [Nm]	
1	11	1	11	1	31	1	31	1	71	1	71	1	174	1	174	
2	10	2	11	2	28	2	31	2	65	2	71	2	159	2	174	
3	9	3	8	3	25	3	31	3	59	3	60	3	153	3	138	
4		4	7	4	23	4	25	4	56	4	47	4	143	4	108	
5		5	5	5	22	5	21	5	52	5	38	5	135	5	89	

Important:

The maximum permissible torque on the drive shaft is the lowest value of the speed- or stroke-dependent torque value.

Example above:

OSP-E25BHD, stroke 5 m, required speed 3 m/s from table T2
 speed 3 m/s gives 25 N_m and stroke 5 m gives 21 Nm. Max. torque for this application is 21 Nm.

Maximum Permissible Loads						T3
Series	Max. applied load		Max. moments [Nm]			
	F _y [N]	F _z [N]	M _x	M _y	M _z	
OSP-E20BHD	1600	1600	21	150	150	
OSP-E25BHD	2000	3000	50	500	500	
OSP-E32BHD	5000	10000	120	1000	1400	
OSP-E50BHD	12000	15000	180	1800	2500	

Combined Loads

If the actuator is subjected to several forces, loads and moments at the same time, the maximum load is


calculated with the equation shown here. The maximum permissible loads must not be exceeded.

Equation for Combined Loads

$$\frac{F_y}{F_y(\max)} + \frac{F_z}{F_z(\max)} + \frac{M_x}{M_x(\max)} + \frac{M_y}{M_y(\max)} + \frac{M_z}{M_z(\max)} \leq 1$$

The total of the loads must not exceed >1 under any circumstances.

Forces, loads and moments

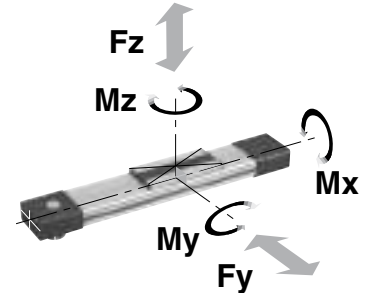

The distance (l_x, l_y, l_z) for calculation of moments relates to the centre axis of the actuator. Bending moments are calculated from the centre of the actuator and F indicates actual force.



$$M = F \cdot l \text{ [Nm]}$$

$$M_x = M_{x \text{ static}} + M_{x \text{ dynamic}}$$

$$M_y = M_{y \text{ static}} + M_{y \text{ dynamic}}$$

$$M_z = M_{z \text{ static}} + M_{z \text{ dynamic}}$$

Maximum Permissible Unsupported Length – Placing of Profile mounting

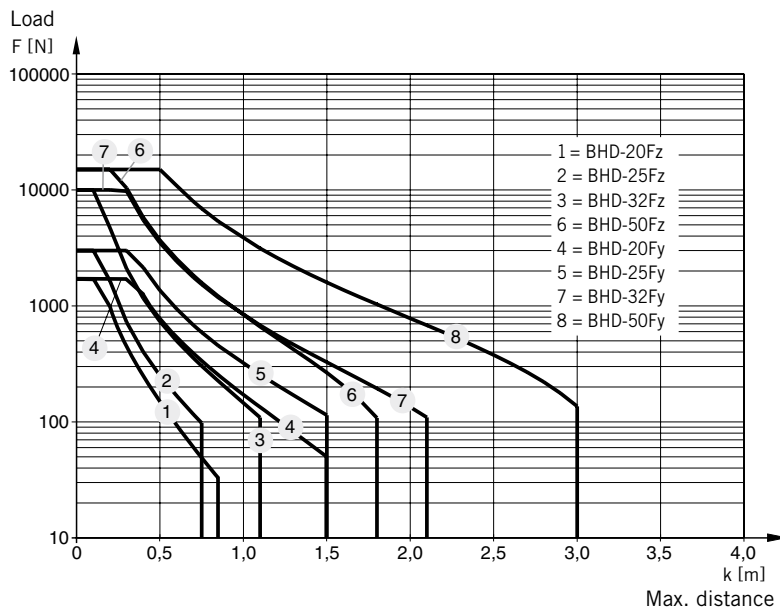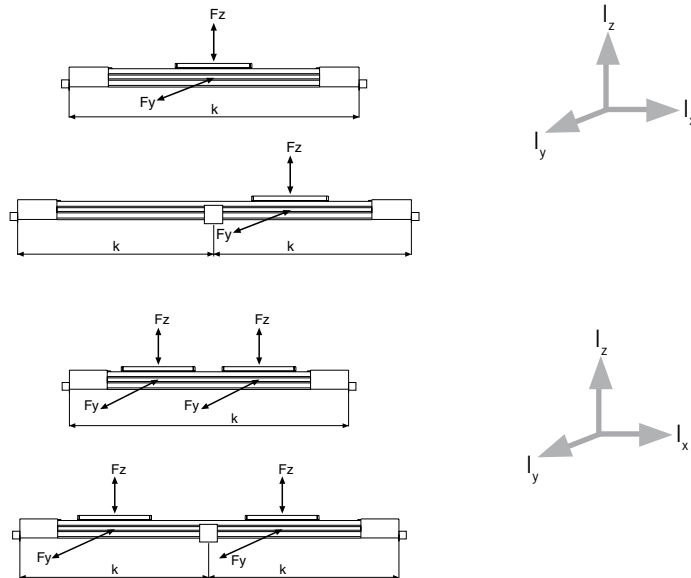

Maximum Permissible Unsupported Length

Stroke Length

The stroke lengths of the actuators are available in multiples of 1 mm up to 5700 mm.

Other stroke lengths are available on request.

The end of stroke must not be used as a mechanical stop.

Allow an additional safety clearance at both ends equivalent to the linear movement of one revolution of the drive shaft, but at least 100 mm.

The use of an AC motor with frequency converter normally requires a larger clearance than that required for servo systems.

For advice, please contact your local Parker Origa technical support department.

* For Bi-parting version the max. load (F) is the total load of both carriers



$$F = F_{\text{carrier 1}} + F_{\text{carrier 2}}$$

k = Max. permissible distance between mountings/Profile Mounting for a given load F.


When loadings are below or up to the curve in the graph below the deflection will be max. 0.01 % of distance k.

OSP-E..BHD Belt Actuator with Integrated Ball Bearing Guide – Basic Unit

Drive shaft versions with
 - clamp shaft
 - plain shaft or
 - clamp shaft with plain shaft
 (Option)

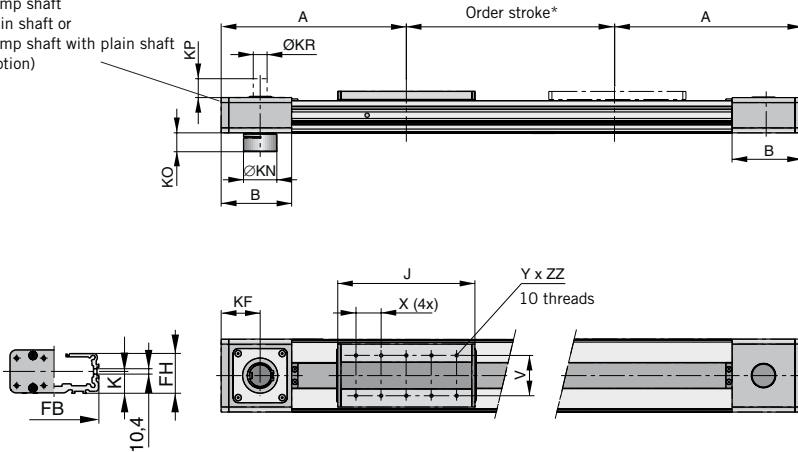


Mounting holes for motor flange or external planetary gearbox ¹⁾



Hollow shaft with keyway (Option) Dimension Table [mm]

Series	KB*	KC	KL	KT	KU x KJ
OSP-E20BHD	12 ^{H7}	13.8	4	65.7	M6 x 8
OSP-E25BHD	16 ^{H7}	18.3	5	82	M8 x 8
OSP-E32BHD	22 ^{H7}	24.8	6	106	M10 x 12
OSP-E50BHD	32 ^{H7}	35.3	10	144	M12 x 19



¹⁾ Note:

The mounting holes for the coupling housing / motor flange / gearbox are located on the opposite side to the carrier (motor mounting standard). They also can be located on the same side as the carrier (motor mounting 180° standard).


* Note:

The mechanical end position must not be used as a mechanical end stop. Allow an additional safety clearance at both ends equivalent to the linear movement of one revolution of the drive shaft, but at least 100 mm.

Order stroke = required travel + 2 x safety distance.


The use of an AC motor with frequency converter normally requires a larger safety clearance than that required for servo systems. For further information please contact your local Parker Origa representative.

Option – Tandem

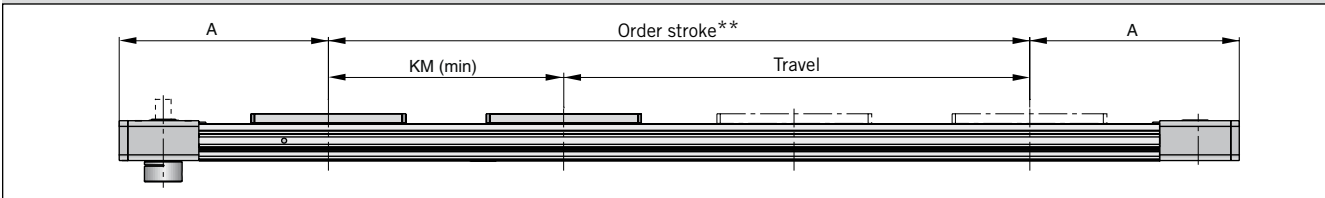

** Order stroke = required travel + KM min + 2 x safety distance

Option – Bi-Parting

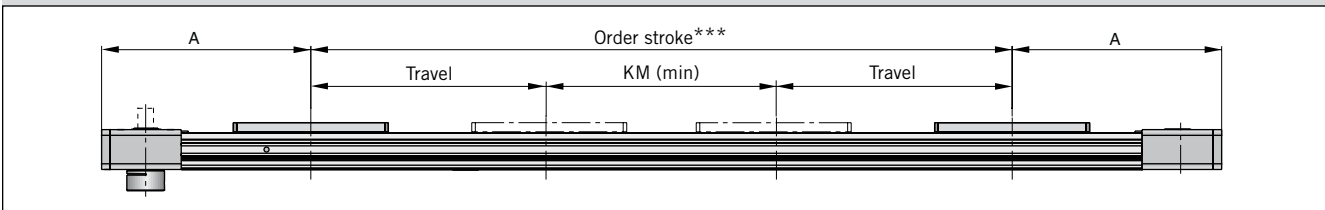

*** Order stroke = 2 x required travel + KM min + 2 x safety distance

Dimension Table [mm]

Series	A	B	C	E	GxH	J	K	M	S	V	X	YxZZ	CE	CF	EC	EF	FB	FH	KF	KM _{min}	KM _{rec.}	KN	KO	KP	KR	KS	KT	KUxKJ
OSP-E20BHD	185	76.5	73	18	M5x8.5	155	21.1	27.6	67	51	30	M5x8	38	49	60	27	73	36	42.5	180	220	27	18	25	12 _{h7}	12 ^{H7}	65.7	M6x8
OSP-E25BHD	218	88	93	25	M5x10	178	21.5	31	85	64	40	M6x8	42	52.5	79	27	92	39.5	49	210	250	34	21.7	30	16 _{h7}	16 ^{H7}	82	M8x8
OSP-E32BHD	262	112	116	28	M6x12	218	28.5	38	100	64	40	M6x10	56	66.5	100	36	116	51.7	62	250	300	53	30	30	22 _{h7}	22 ^{H7}	106	M10x12
OSP-E50BHD	347	147	175	18	M6x12	288	43	49	124	90	60	M6x10	87	92.5	158	70	164	77	79.5	354	400	75	41	35	32 _{h7}	32 ^{H7}	144	M12x19

(Other dimensions for KS and KB for special drive shafts on request – see order instructions.)

Series OSP-E..BHD – with Integrated Planetary Gearbox (Option)



Integrated Planetary Gearbox

Features

- Highly compact and rigid solution fully integrated in the drive cap housing
- Purpose designed for the BHD series.
- Available with three standard ratios (3, 5 and 10)
- Very low backlash
- A wide range of available motor flanges

Please contact your local Parker Origa technical support for available motor flanges.

Material:
Aluminium (AL-H) / Steel (St-H)

Standard Version:

- Gearbox on opposite side to carrier.


Note:

When ordering, specify model/type of motor and manufacturer for correct motor flange.

Performance Overview

Characteristics		Unit	Description		
Series			OSP-E25BHD	OSP-E32BHD	OSP-E50BHD
Ratio (1-stage)	i		3/5/10		
Max. axial load	F_{amax}	[N]	1550	1900	4000
Torsional rigidity (i=5)	$C_{t,21}$	[Nm/arcmin]	3.3	9.5	25.0
Torsional rigidity (i=3/10)	$C_{t,21}$	[Nm/arcmin]	2.8	7.5	222.0
Torsional backlash	J_t	[arcmin]	<12		
Linear motion per revolution of drive shaft		[mm]	220	280	360
Nominal input speed	n_{nom}	[min ⁻¹]	3700	3400	2600
Max. input speed	n_{1max}	[min ⁻¹]	6000		
No-load torque at Nominal input speed	T_{012}	[Nm]	<0.14	<0.51	<1.50
Lifetime		[h]	20 000		
Efficiency	η	[%]	>97		
Noise level ($n_1=3000 \text{ min}^{-1}$)	L_{PA}	[db]	<70	<72	<74

Dimensions

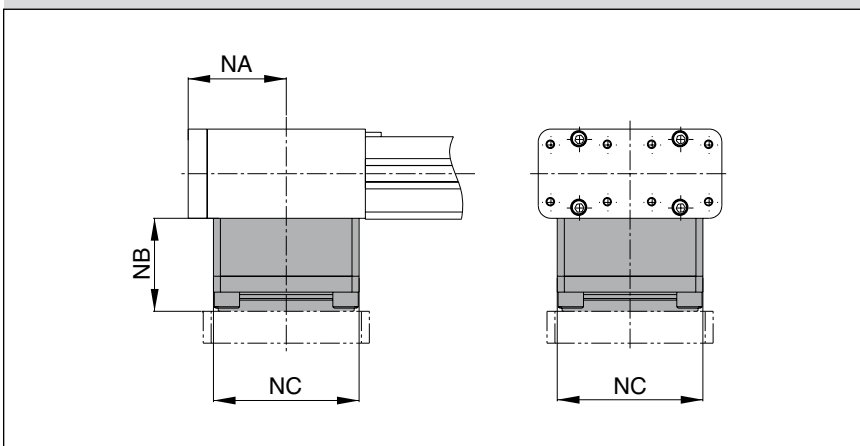

Dimension Table [mm] and additional Weight

Series	NA	NB	NC	Weight (Mass) [kg]
OSP-E25BHD	49	43	76	2.6
OSP-E32BHD	62	47	92	4.9
OSP-E50BHD	80	50	121	9.6

OSP-E...BHD

Belt Actuator with integrated Roller Guide

Size 25, 32, 50



Characteristics			
Characteristics	Symbol	Unit	Description
General Features			
Series			OSP-E..BHD
Name			Belt Actuator with integrated Roller Guide
Mounting			see drawings
Ambient Temperatur range	ϑ_{\min} ϑ_{\max}	°C °C	-30 +80
Weight (Mass)		kg	see table
Installation			In any position
Material	Slotted profile		Extruded anodized aluminium
	Belt		Steel-corded polyurethane
	Pulley		Aluminium
	Guide		Roller Guide
	Guide rail		Aluminium
	Track		high alloyed steel
	Roller cartridge		Steel rollers in aluminium housing
	Sealing band		Hardened, corrosion resistant steel
	Screws, nuts		Zinc plated steel
Mountings		Zinc plated steel and aluminium	
Encapsulation class		IP	54

Standard Versions

- Belt Actuator with integrated roller guide
- Drive shaft with clamp shaft or plain shaft
- Choice of motor mounting side
- Dovetail profile for mounting of accessories and the actuator itself

Options

- Tandem version for higher moments
- Bi-parting version for synchronised movements
- Integrated planetary gearbox
- Drive shaft with
 - clamp shaft and plain shaft
 - hollow shaft with keyway
- Special drive shaft versions on request

Weight (mass) and Inertia						
Series	Weight (mass) [kg]			Inertia [$\times 10^{-6}$ kgm ²]		
	at stroke 0 m	ad per metre stroke	moving Mass	at stroke 0 m	ad per metre stroke	moving Mass
OSP-E25BHD	3,8	4,3	1,0	984	197	821
OSP-E32BHD	7,7	6,7	1,9	3498	438	1459
OSP-E50BHD	22,6	15,2	4,7	19690	1489	3103
OSP-E25BHD*	5,7	4,3	2,0	1805	197	821
OSP-E32BHD*	11,3	6,7	3,8	6358	438	1459
OSP-E50BHD*	31,7	15,2	9,4	34274	1489	3103

*Version: Tandem and Bi-parting (Option)

Installation Instructions

Use the threaded holes in the end cap for mounting the actuator. Check if profile mountings are needed using the maximum allowable unsupported length graph on page 22. At least one end cap must be secured to prevent axial sliding when profile mountings are used.

Maintenance

Depending on operating conditions, inspection of the actuator is recommended after 12 months or 3000 km operation. Please refer to the operating instructions supplied with the actuator.

First service start-up

The maximum values specified in the technical data sheet for the different products must not be exceeded. Before taking the actuator as a machine into service, the user must ensure the adherence to the EC Machine Directive 2006/42/EG.



Performance Overview				T1
Characteristics	Unit	Description		
Series		OSP-E25BHD	OSP-E32BHD	OSP-E50BHD
Max. speed	[m/s]	10	10	10
Linear motion per revolution drive shaft	[mm]	180	240	350
Max. rpm. drive shaft	[min ⁻¹]	3000	2500	1700
Max. effective action force F _A at speed	< 1 m/s: 1-3 m/s: > 3-10 m/s:	[N] [N] [N]	1070 890 550	1870 1560 1030
No-load torque	[Nm]	1.2	2.2	3.2
Max. acceleration/deceleration	[m/s ²]	40	40	40
Repeatability	[mm/m]	±0.05	±0.05	±0.05
Max. standard stroke length	[mm]	7000	7000	7000

Maximum Permissible Torque on Drive Shaft Speed and Stroke												T2
Speed [m/s]	OSP-E25BHD			OSP-E32BHD				OSP-E50BHD				
	Torque [Nm]	Stroke [m]	Torque [Nm]	Speed. [m/s]	Torque [Nm]	Stroke [m]	Torque [Nm]	Speed. [m/s]	Torque [Nm]	Stroke [m]	Torque [Nm]	
1	31	1	31	1	71	1	71	1	174	1	174	
2	28	2	31	2	65	2	71	2	159	2	174	
3	25	3	31	3	59	3	60	3	153	3	138	
4	23	4	25	4	56	4	47	4	143	4	108	
5	22	5	21	5	52	5	38	5	135	5	89	
6	21	6	17	6	50	6	32	6	132	6	76	
7	19	7	15	7	47	7	28	7	126	7	66	
8	18			8	46			8	120			
9	17			9	44			9	116			
10	16			10	39			10	108			

Important:

The maximum permissible torque on the drive shaft is the lowest value of the speed- or stroke-dependent torque value.

Example above:

OSP-E25BHD, stroke 5 m, required speed 3 m/s from table T2 speed 3 m/s gives 25 Nm and stroke 5 m gives 21 Nm. Max. torque for this application is 21 Nm.

Maximum Permissible Loads					T3
Series	Max. applied load F _y , F _z [N]	Max. moments [Nm]			
		M _x	M _y	M _z	
OSP-E25BHD	986	11	64	64	
OSP-E32BHD	1348	19	115	115	
OSP-E50BHD	3704	87	365	365	

Sizing Performance Overview

Maximum Loadings

Sizing of Actuator

The following steps are recommended:

- Determination of the lever arm length l_x , l_y and l_z from m_e to the centre axis of the actuator.
- Calculation of the load F_x or F_y to the carrier caused by m_e
 $F = m_e \cdot g$
- Calculation of the static and dynamic force F_A which must be transmitted by the belt.
 $F_{A(horizontal)} = F_a + F_0 = m_g \cdot a + M_0 \cdot 2\pi / U_{ZR}$
 $F_{A(vertical)} = F_g + F_a + F_0 = m_g \cdot g + m_g \cdot a + M_0 \cdot 2\pi / U_{ZR}$
- Calculation of all static and dynamic bending moments M_x , M_y and M_z which occur in the application
 $M = F \cdot l$
- Selection of maximum permissible loads via Table T3.
- Calculation and checking of the combined load, which must not be higher than 1.
- Checking of the maximum torque that occurs at the drive shaft in Table T2.
- Checking of the required action force F_A with the permissible load value from Table T1.

For motor sizing, the effective torque must be determined, taking into account the cycle time.

Legend

- l = distance of a mass in the x-, y- and z-direction from the guide [m]
- m_e = external moved mass [kg]
- m_{LA} = moved mass of actuator [kg]
- m_g = total moved mass ($m_e + m_{LA}$) [kg]
- $F_{x/y}$ = load exerted on the carrier in dependence of the installation position [N]
- F_A = action force [N]
- M_0 = no-load torque [Nm]
- U_{ZR} = circumference of the pulley (linear movement per revolution) [m]
- g = gravity [m/s²]
- a_{max} = maximum acceleration [m/s²]

Forces, loads and moments

The distance (l_x, l_y, l_z) for calculation of moments relates to the centre axis of the actuator. Bending moments are calculated from the centre of the actuator and F indicates actual force.

$$M = F \cdot l \text{ [Nm]}$$

$$M_x = M_{x \text{ static}} + M_{x \text{ dynamic}}$$

$$M_y = M_{y \text{ static}} + M_{y \text{ dynamic}}$$

$$M_z = M_{z \text{ static}} + M_{z \text{ dynamic}}$$

Combined Loads

If the actuator is subjected to several forces, loads and moments at the same time, the maximum load is

calculated with the equation shown here. The maximum permissible loads must not be exceeded.

Equation for Combined Loads

$$\frac{F_y}{F_y(\text{max})} + \frac{F_z}{F_z(\text{max})} + \frac{M_x}{M_x(\text{max})} + \frac{M_y}{M_y(\text{max})} + \frac{M_z}{M_z(\text{max})} \leq 1$$

The total of the loads must not exceed >1 under any circumstances.

Maximum Permissible Unsupported Length

Stroke Length

The stroke lengths of the actuators are available in multiples of 1 mm up to 5700 mm.

Other stroke lengths are available on request.

The end of stroke must not be used as a mechanical stop.

Allow an additional safety clearance at both ends equivalent to the linear movement of one revolution of the drive shaft, but at least 100 mm.

The use of an AC motor with frequency converter normally requires a larger clearance than that required for servo systems.

For advice, please contact your local Parker Origa technical support department.


* For the bi-parting version the maximum load (F) complies with the total of the load at both carriers.

$$F = F_{\text{carriage 1}} + F_{\text{carriage 2}}$$

k = Maximum permissible distance between mountings/mid-section support for a given load F.

If the loads are below or up to the curve in the graph the deflection will be max. 0.01 % of distance k.

Maximum Permissible Unsupported Length – Placing of Profile Mounting

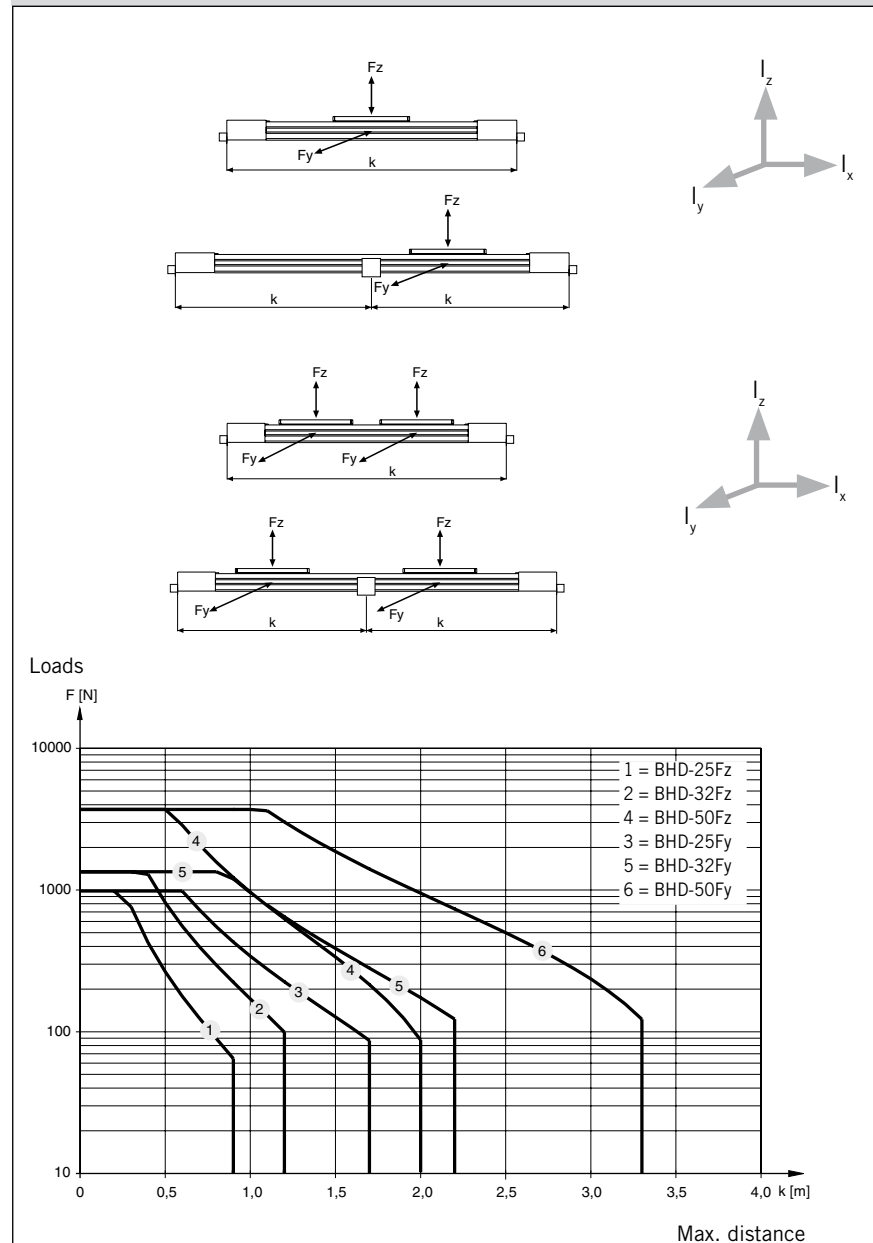

OSP-E..BHD
Belt Actuator with Integrated Roller Guide – Basic Unit

Drive Shaft versions with
 - clamp shaft
 - plain shaft or
 - clamp shaft with plain shaft (Option)

Hollow shaft with keyway (Option)
 Dimension table [mm]

Series	KB	KC	KL	KT	KUxKJ
OSP-E25BHD	16 ^{H7}	18.3	5	82	M8x8
OSP-E32BHD	22 ^{H7}	24.8	6	106	M10x12
OSP-E50BHD	32 ^{H7}	35.3	10	144	M12x19

1) Note:
 The mounting holes for the coupling housing / motor flange / gearbox are located on the opposite side to the carrier (motor mounting standard). They also can be located on the same side as the carrier (motor mounting 180° standard).

*** Note:**
 The mechanical end position must not be used as a mechanical end stop.
 Allow an additional safety clearance at both ends equivalent to the linear movement of one revolution of the drive shaft, but at least 100 mm.
 Order stroke = required travel + 2 x safety distance.
 The use of an AC motor with frequency converter normally requires a larger safety clearance than that required for servo systems.
 For further information please contact you local Parker Origa representative.

Option – Tandem

**** Order stroke = required travel + KM min + 2 x safety distance**

Options – Bi-Parting

***** Order stroke = 2 x required travel + KM min + 2 x safety distance**

Dimension Table [mm]

Series	A	B	C	E	GxH	J	K	M	S	V	X	YxZZ	CE	CF	EC	EF	FB	FH	KF	KM _{min}	KM _{rec.}	KN	KO	KP	KR	KS	KT	KUxKJ
OSP-E25BHD	218	88	93	25	M5x10	178	21.5	31	85	64	40	M6x8	42	52.5	79	27	92	39.5	49.0	210	250	34	21.7	30	16 _{H7}	16 ^{H7}	82	M8x8
OSP-E32BHD	262	112	116	28	M6x12	218	28.5	38	100	64	40	M6x10	56	66.5	100	36	116	51.7	62.0	250	300	53	30.0	30	22 _{H7}	22 ^{H7}	106	M10x12
OSP-E50BHD	347	147	175	18	M6x12	263	43.0	49	124	90	60	M6x10	87	92.5	158	70	164	77.0	79.5	295	350	75	41.0	35	32 _{H7}	32 ^{H7}	144	M12x19





(Other dimensions for KS and KB for special drive shafts on request – see order instructions.)

Order Instructions OSPE20 — 6 0 0 02 — 00000 — 0 00 0 0 0









Size of actuator	
20	Size 20 (only type of actuator 6)
25	Size 25
32	Size 32
50	Size 50

Type of actuator	
5	Belt actuator with integrated roller guide (for size 25, 32 and 50)
6	Belt actuator with integrated ball bearing guide







Carriage	
0	Standard
1*	Tandem
2*	Bi-parting

Operating direction	
0	Standard right 
1	Standard left 
2	Bi-parting right 
3	Bi-parting left 

Order stroke
5 digits input in mm

Drive Shaft		
Motor mounting position see M		
0 A	Plain shaft	
0 B	Plain shaft	
0 2	Clamp shaft	
0 3*	Clamp shaft with plain shaft	
0 4	Clamp shaft	
0 5*	Clamp shaft with plain shaft	
0 6*	Hollow shaft with keyway	
0 7*	Hollow shaft with keyway	

Special drive shaft on request (8/9)


Integrated Gear *		
1 x**	ratio i=3	
2 x**	ratio i=5	
3 x**	ratio i=10	
4 x**	ratio i=3	
5 x**	ratio i=5	
6 x**	ratio i=10	

* Option

** for sizes 25, 32 and 50

OSP-E.. BHD as parallel actuator with intermediate drive shaft MAS-..

OSP-E..60005-..	M	
OSP-E..6010A-..		
OSP-E..60003-..	M	
OSP-E..6010B-..		



Mounting Kit for Gear *					
Size		20	25	32	50
A7	PS60	x ²	x ¹		
A8	PS90			x ¹	
A9	PS115				x ¹
C0	LP050 / PV40-TA	x ¹			
C1	LP070 / PV60-TA	x ²	x ¹		
C2	LP090 / PV90-TA			x ¹	
C3	LP120				x ¹

x¹: Kit for **Drive Shaft** with clamp shaft
(02 / 03 / 04 / 05)

x²: Kit for **Drive Shaft** with plain shaft
(0A / 0B)

Info: Motor and Gear mounting dimensions
see page 193

Niro	
0	Standard
1*	Niro screws

Magnetic switches *	
0	Without
1	1 pc. RST-K 2NO / 5m cable
2	1 pc. RST-K 2NC / 5m cable
3	2 pc. RST-K 2NC / 5m cable
4	2 pc. RST-K 2NC, 1 pc. RST-K 2NO / 5m cable
5	1 pc. RST-S 2NO / M8 plug
6	1 pc. RST-S 2NC / M8 plug
7	2 pc. RST-S 2NC / M8 plug
8	2 pc. RST-S 2NC, 1 pc. RST-S 2NO / M8 plug
A	1 pc. EST-S NPN / M8 plug
B	2 pc. EST-S NPN / M8 plug
C	3 pc. EST-S NPN / M8 plug
D	1 pc. EST-S PNP / M8 plug
E	2 pc. EST-S PNP / M8 plug
F	3 pc. EST-S PNP / M8 plug
see page 165 ff	

Profile mounting *	
0	Without
1	1 pair type E1
2	1 pair type D1
3	1 pair type MAE
4	2 pair type E1
5	2 pair type D1
6	2 pair type MAE
7	3 pair type E1
8	3 pair type D1
9	3 pair type MAE
A	4 pair type E1
B	4 pair type D1
C	4 pair type MAE
see page 147 ff	

End cap mounting *	
0	Without
A	1 pair type CN
B	1 pair type CO
see page 141 ff	

Accessories - please order separately

Description	Page
Motor mountings	135
Multi-Axis Systems for actuators	177 ff

OSP-E..BV

Vertical Belt Actuator with Integrated Ball Bearing Guide



The right to introduce technical
modifications is reserved

Contents

Description	Page
Overview	28
Technical Data	31
Dimensions	34
Order Instructions	36

VERTICAL BELT ACTUATOR WITH INTEGRATED BALL BEARING GUIDE IN MULTI-AXIS SYSTEMS

The OSP-E..BV vertical belt actuator with integrated ball bearing guide has been specially developed for lifting movements in the Z-axis.


The especially low vibration OSP-E..BV vertical actuator in combination with the heavy duty series OSP-E..BHD meets the highest demands in portal and handling applications.


Advantages

- Fixed actuator head for low moving mass
- Integrated ball bearing guide for high bending moments
- Magnetic switch set for contactless position sensing
- Easy to install
- Low maintenance

Features

- High acceleration and speed
- Drive Shaft versions with clamp shaft or plain shaft
- Power transmission by belt
- Moving axis profile
- Complete motor and control packages

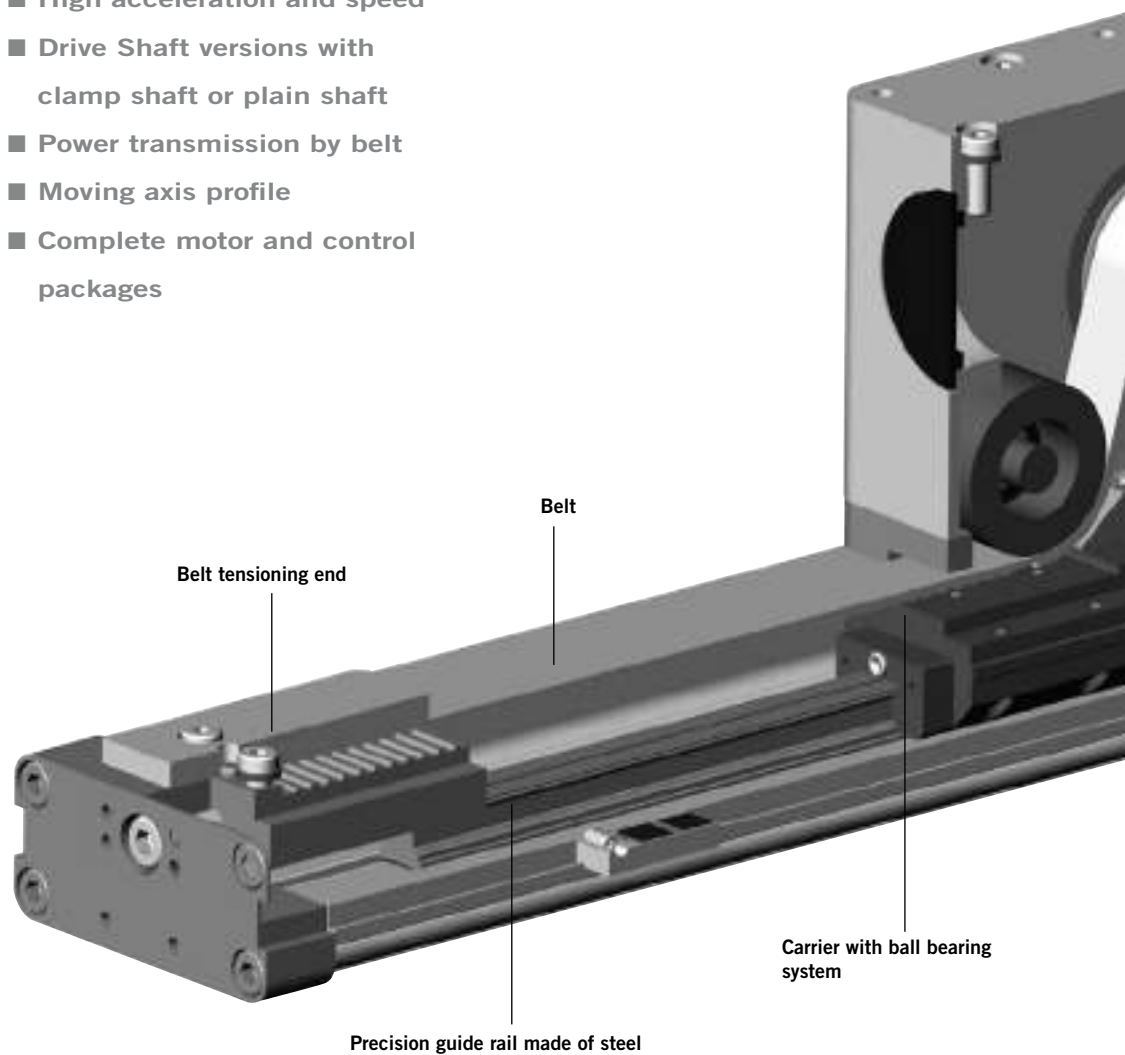

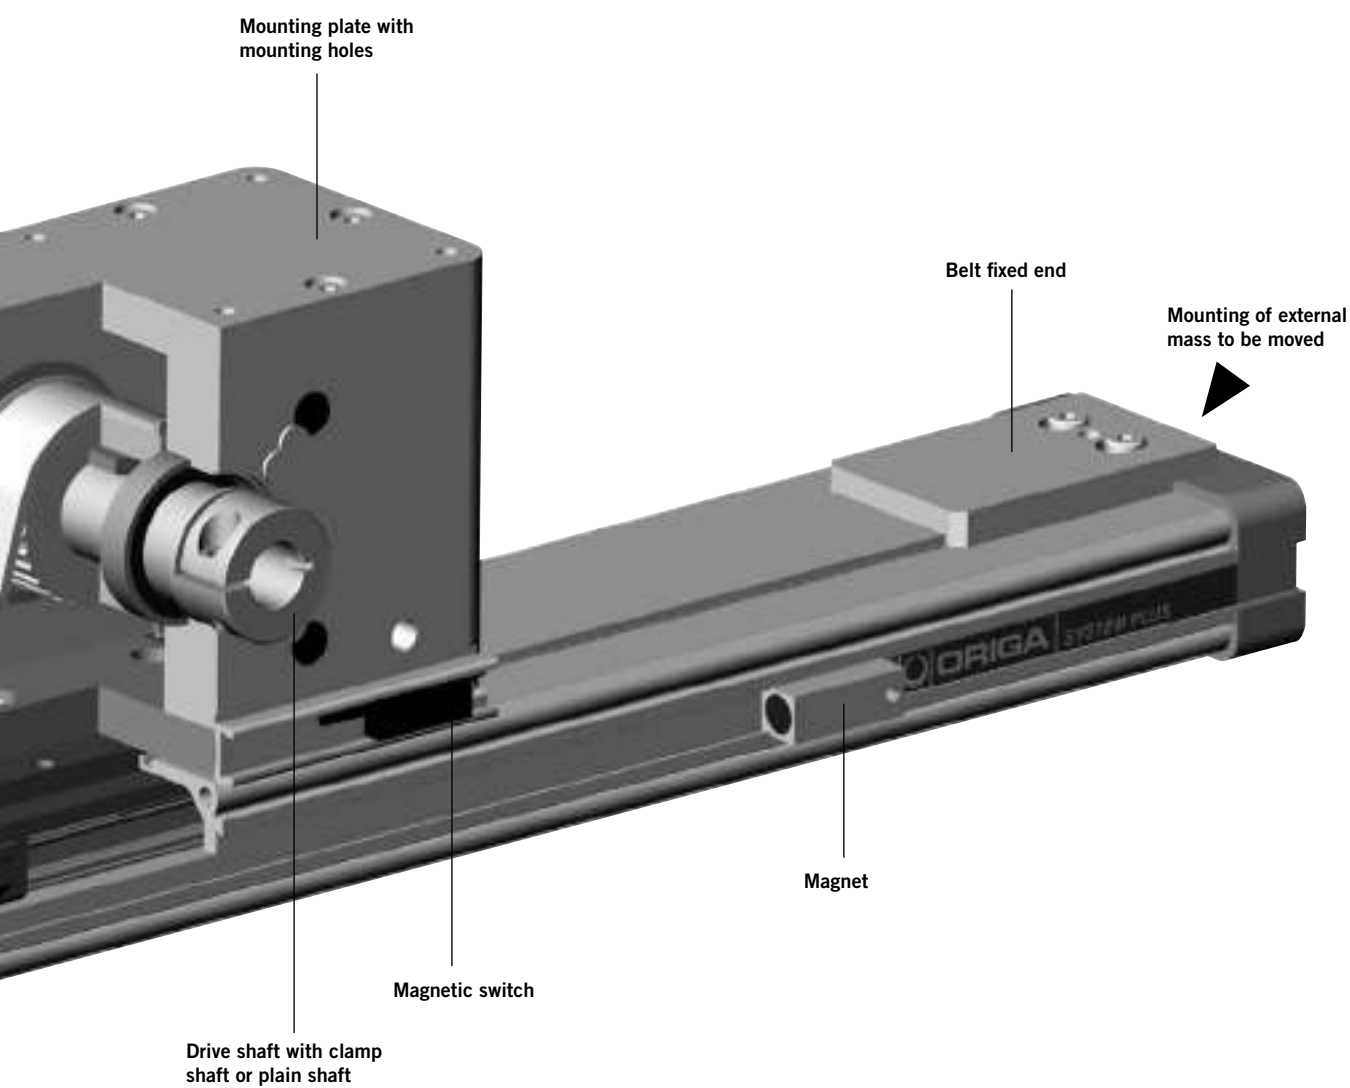

Take the easy route and load all the dimensions into your system. The file is suitable for all current CAD systems – available on CD-Rom or at www.parker-origa.com



OPTIONS AND ACCESSORIES

OSP-E..BV, VERTICAL BELT ACTUATOR WITH INTEGRATED BALL BEARING GUIDE

STANDARD VERSION OSP-E..BV

Standard actuator head with clamp shaft or plain shaft and integrated ball bearing guide with two carriers. Choice of side on which gearbox or motor is to be mounted.

DRIVE SHAFT
"CLAMP SHAFT AND PLAIN SHAFT"
OR "DOUBLE PLAIN SHAFT"
e.g. for parallel operation of two Z-axes with an intermediate drive shaft.

ACCESSORIES

MOTOR MOUNTINGS

For connection of gearbox or motor direct to drive shaft with clamp shaft, or with a motor coupling to drive shaft with plain shaft.

Drive Shaft with Clamp Shaft



Drive Shaft with Plain Shaft



Drive Shaft with Clamp Shaft and Plain Shaft



Drive Shaft with Double Plain Shaft



MAGNETIC SWITCHES SET

Magnetic switches with connector, mounting rail and magnets for contactless sensing of the end positions. Cable (suitable for cable chain) can be ordered separately in 5 m, 10 m or 15 m length.


OPTIONS

TANDEM

Additional actuator head and two additional carriers for higher bending moments.



HOLLOW SHAFT WITH KEYWAY
For direct connection of gearbox or motor with keyway.



MULTI-AXIS SYSTEMS

For modular assembly of actuators up to multi-axis systems.



Characteristics			
Characteristics	Symbol	Unit	Description
General Features			
Series			OSP-E..BV
Name			Vertical Belt Actuator with integrated Ball Bearing Guide
Mounting			See drawings
Temperature range	ϑ_{\min} ϑ_{\max}	°C °C	-30 +80
Weight (mass)		kg	See table
Installation			vertical
Material	Profile		Extruded anodized aluminium
	Belt		Steel-corded polyurethane
	Pulley		Aluminium
	Guide		ball bearing guide
	Guide rail		Hardened steel rail with high precision, accuracy class N
	Guide carrier		Steel carrier with integrated wiper system, grease nipples, preloaded 0.08 x C, accuracy class N
	Screws, nuts		Zinc plated steel
Encapsulating class		IP	20

Weight (mass) and Inertia							
Series	Total weight (Mass) [kg]		Moving mass [kg]		Inertia [$\times 10^{-6}$ kgm ²]		
	At stroke 0 m	Actuator head	At stroke 0 m	Add per metre stroke	At Stroke 0 m	Add per metre stroke	Add per kg mass
OSP-E20BV	3.4	1.9	1.6	4.0	486	1144	289
OSP-E25BV	7.7	5.3	2.4	4.4	1695	2668	617
OSP-E20BV*	5.3	2 x 1.9	1.6	4.0	533	1144	289
OSP-E25BV*	13	2 x 5.3	2.4	4.4	1915	2668	617

* Version: Tandem (Option)

Installation Instructions

Make sure that the OSP-E..BV is always operated by motor with holding brake on the actuator side. For the mounting of the external mass to be moved there are threaded holes in the end caps. Before mounting, check the correct centre of gravity distance from the table.

Mount the external mass on the belt fixed end, so that the belt tension can be checked and adjusted at the belt tensioning end without dismantling.

Maintenance

Depending on operating conditions, inspection of the actuator is recommended after 12 months or 3000 km operation.

Please refer to the operating instructions supplied with the actuator.

First service start-up

The maximum values specified in the technical data sheet for the different products must not be exceeded. Before taking the actuator as a machine into service, the user must ensure the adherence to the EC Machine Directive 2006/42/EG.

OSP-E..BV

Vertical Belt Actuator with integrated Ball Bearing Guide

Size 20, 25



Standard Version:
The

- Vertical Belt actuator with integrated ball bearing guide
- Drive shaft with clamp shaft or plain shaft
- Choice of motor mounting side

Options:

- Tandem version for higher moments
- Drive shaft with
 - clamp shaft and plain shaft or double plain shaft
 - hollow shaft with keyway
- Special drive shaft versions on request.



Sizing Performance Overview

Maximum Loadings

Sizing of Actuator

The following steps are recommended:

1. Determination of the lever arm length l_x , l_y and l_z from m_e to the centre axis of the actuator.
2. Calculation of the static and dynamic force F_A which must be transmitted by the belt.

$$F_A = F_g + F_a + F_0$$

$$= m_g \cdot g + m_g \cdot a + M_0 \cdot 2\pi / U_{ZR}$$
3. Calculation of all static and dynamic moments M_x , M_y and M_z which occur in the application.
 $M = F \cdot l$
4. Selection of maximum permissible loads via Table T3.
5. Calculation and checking of the combined load, which must not be higher than 1.
6. Checking of the maximum moment that occurs at the drive shaft in Table T2.
7. Checking of the required action force F_A with the permissible load value from Table T1.

For motor sizing, the effective torque must be determined, taking into account the cycle time.

Legend

- l = distance of a mass in the x-, y- and z-direction from the guide [m]
- m_e = external moved mass [kg]
- m_{LA} = moved mass of actuator [kg]
- m_g = total moved mass ($m_e + m_{LA}$) [kg]
- F_A = action force [N]
- M_0 = no-load torque [Nm]
- U_{ZR} = circumference of the pulley (linear movement per revolution) [m]
- g = gravity [m/s^2]
- a_{max} = maximum acceleration [m/s^2]

Performance Overview		T1		
Characteristics	Unit	Description		
Series		OSP-E20BV	OSP-E25BV	
Max. Speed	[m/s]	3.0	5.0	
Linear motion per revolution of drive shaft	[mm/U]	108	160	
Max. rpm. drive shaft	[min ⁻¹]	1700	1875	
Max. effective action force F_A at speed	1 m/s	[N]	650	1430
	1 - 2 m/s	[N]	450	1200
	> 3 - 5 m/s	[N]	–	1050
No-load torque ²⁾	[Nm]	0.6	1.2	
Max. acceleration/deceleration	[m/s ²]	20	20	
Repeatability	+/- [mm/m]	0.05	0.05	
Max. standard stroke length ¹⁾	[mm]	1000	1500	
Max. recommended permissible mass ³⁾	[kg]	10	20	

¹⁾ Longer strokes on request

²⁾ As a result of static friction force

³⁾ vertical

Max. Permissible Torque on Drive Shaft Speed / Stroke				T2			
OSP-E-20BV				OSP-E-25BV			
Speed [m/s]	Torque [Nm]	Stroke [m]	Torque [Nm]	Speed [m/s]	Torque [Nm]	Stroke [m]	Torque [Nm]
1	19	1	17	1	36	1	36
2	17	2	11	2	30	2	36
3	16			3	30		
				4	28		
				5	27		

Important:

The maximum permissible torque on the drive shaft is the lowest value of the speed- or stroke-dependent torque value.

Example above:

OSP-E25BV required speed $v = 3$ m/s and stroke = 1 m.


Accordingly Table T2 shows permissible moments of 30 Nm for the speed and 36 Nm for the stroke. Therefore the maximum moment at the drive shaft is determined by the speed and must not exceed 30 Nm.

Maximum Permissible Loads

T3

Series	Max. applied load		Max. moments		
	Fy [N]	Fz [N]	Mx [Nm]	My [Nm]	Mz [Nm]
OSP-E20BV	1600	1600	20	100	100
OSP-E25BV	2000	3000	50	200	200

Forces, loads and moments

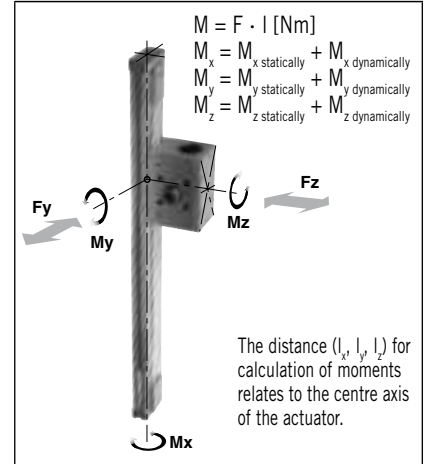

Equation for Combined Loads

$$\frac{F_y}{F_y \text{ (max)}} + \frac{F_z}{F_z \text{ (max)}} + \frac{M_x}{M_x \text{ (max)}} + \frac{M_y}{M_y \text{ (max)}} + \frac{M_z}{M_z \text{ (max)}} \leq 1$$


The total of the loads must not exceed >1 under any circumstances.

Combined Loads


If the actuator is subjected to several forces, loads and moments at the same time, the maximum load is calculated with the equation shown here. The maximum permissible loads must not be exceeded.

Distance of Centre of Gravity of External Mass from Mid-Point of Actuator


Mass [kg]	OSP-E20BV		OSP-E25BV	
	Lever arm l_z [mm]	Max. permissible acceleration/ deceleration [m/s ²]	Lever arm l_z [mm]	Max. permissible acceleration/ deceleration [m/s ²]
> 3 to 5	0	20	50	20
> 5 to 10	0	20	40	20
> 10 to 15	-	-	35	20
> 15 to 20	-	-	30	15

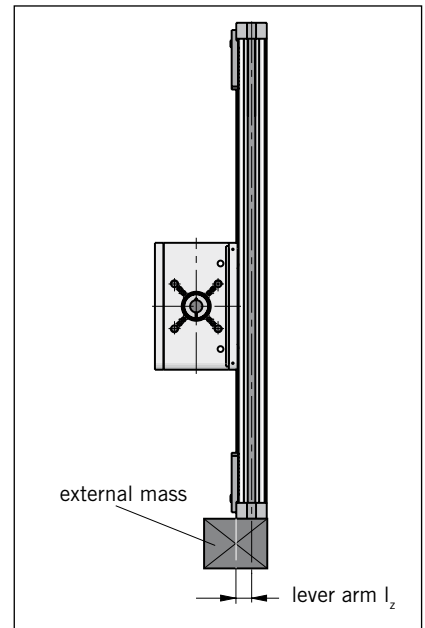


OSP-E..BV
Vertical Belt Actuator with integrated Ball Bearing Guide – Basic Unit

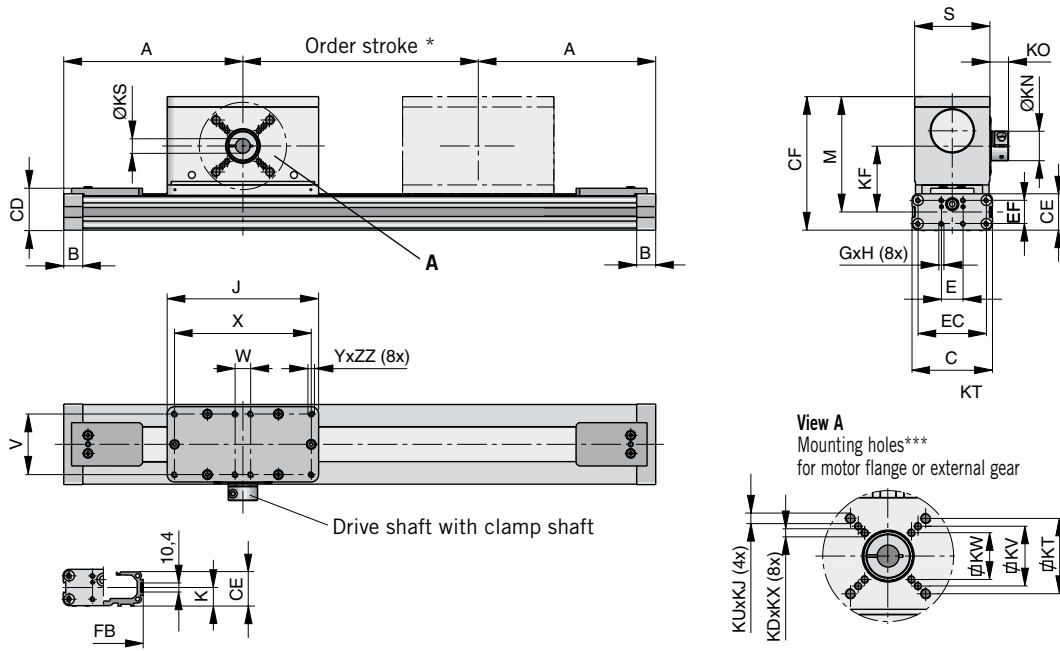

Plain shaft



Hollow shaft with keyway (Option)




Series	ØKB	KC	KL	KP	ØKR
OSP-E20BV	12 ^{H7}	13.8	4	28.5	12 _{h7}
OSP-E25BV	16 ^{H7}	18.3	5	31.5	16 _{h7}

*** Note:**

The mechanical end position must not be used as a mechanical end stop.
 Allow an additional safety clearance at both ends equivalent to the linear movement of one revolution of the drive shaft, but at least 100 mm.
 Order stroke = required travel + 2 x safety distance.
 The use of an AC motor with frequency converter normally requires a larger safety clearance than that required for servo systems.
 For further information please contact your local Parker Origa representative.

Option – Tandem

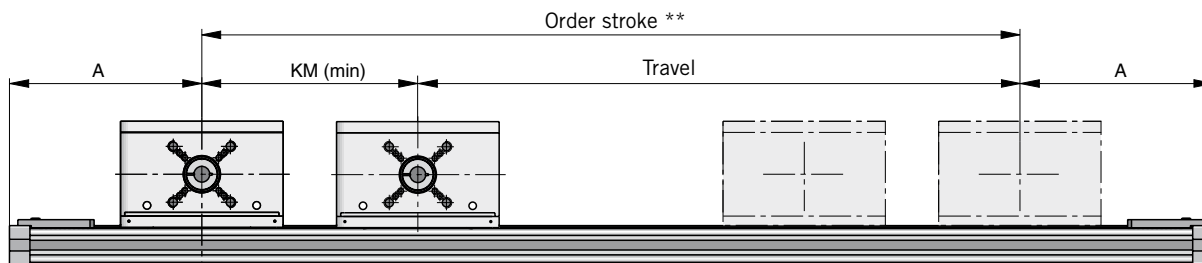

** Order stroke = required travel + KM min + 2 x safety distance.

Dimension Table [mm]																
Series	A	B	C	E	GxH	J	K	M	S	V	W	X	Y	CD	CE	CF
OSP-E20BV	148	22	93	25	M5x12	139	21.1	102.3	68	51	40	120	M6	40.4	34	123.3
OSP-E25BV	210	22	93	25	M5x12	175	21.5	133.5	87	70	18	158	M6	49.0	42	154.5

Series	EC	EF	FB	FH	KDxKX	KF	KM _{min}	KN	KO	KS	KT	KUxKJ	KV	KW	ZZ
OSP-E20BV	59	21	73	36.0	–	61.3	155	27	16	12 ^{H7}	46.5	M6x10	36	–	10
OSP-E25BV	79	27	92	39.5	M6x16	76.0	225	34	21.5	16 ^{H7}	58.0	M8x16	46	36	10

*** The mounting holes for the coupling housing are on the motor-mounting side. Therefore please ensure that the motor-mounting side is correctly stated when ordering the actuator.

(For special drive shafts, other dimensions for KS and KB are available on request – see Order Instructions.)

Dimensions

The magnetic switches and magnets can be mounted on either sides

Dimension table [mm]

Series	MA	MB	MC	MD
OSP-E20BV	46	23.7	42.3	35
OSP-E25BV	56	26.0	51.0	35

Contactless Position Sensing with Magnetic Switches

The magnetic switch set, comprising two magnetic switches, a mounting rail and two magnets, is for contactless sensing of the end positions. The mounting rail and magnetic switches are mounted on the actuator head and the magnets are mounted in the dovetail slot on the profile.

The magnetic switches are the RST-S type (connector version).

For the connecting cable

Parker Origa recommends the use of cable suitable for cable chain.

Order instructions	
Description	Ident-No.
Magnetic sensor set, obtaining: - 2 sensors, Reed NC, type P8S-GESNX - 1 mounting rail - 2 magnets	18210
Connecting cable, suitable for cable chain	
5 m	KL3186
10 m	KL3217
15 m	KL3216











Order Instructions OSPE20 — 7 0 0 02 — 00000 — 0 00 0 0 0

Size	
20	Size 20
25	Size 25

Type of Actuator	
7	Vertical belt actuator with integrated ball bearing guide

Actuator Head	
0	Standard
1*	Tandem

Order stroke
5 digits input in mm

Drive shaft		
Motor mounting position see M		
0 A	Plain shaft / motor standard	M 
0 B	Plain shaft / motor 180° standard	 M
0 C*	Double plain shaft / motor standard	M 
0 D*	Double plain shaft / motor 180° standard	 M
0 2	Clamp shaft / motor standard	M 
0 3*	Clamp shaft with plain shaft / motor standard *	M 
0 4	Clamp shaft / motor 180° standard	 M
0 5*	Clamp shaft with plain shaft / motor 180° standard *	 M
0 6*	Hollow shaft / motor standard *	M 
0 7*	Hollow shaft / motor 180° standard *	 M
Special drive shaft on request (8/9)		

* Option

Magnetic switches *	
0	Without
2*	2pc. RST-S NC / M8 plug / Magnets
see page 165 ff	

Mounting Kit for Motor and Gear *			
Size		20	25
A3	SMx82 xx xx 8 14 ...	x ²	x ²
A7	PS60	x ²	x ¹
C0	LP050 / PV40-TA	x ¹	
C1	LP070 / PV60-TA	x ²	x ¹


x¹: Kit for **Drive Shaft** with clamp shaft
(02 / 03 / 04 / 05)

x²: Kit for **Drive Shaft** with plain shaft
(0A / 0B / 0C / 0D)

Info: Motor and Gear mounting dimensions
see page 193

Niro	
0	Standard
1*	Niro screws

Function and Motor Mounting

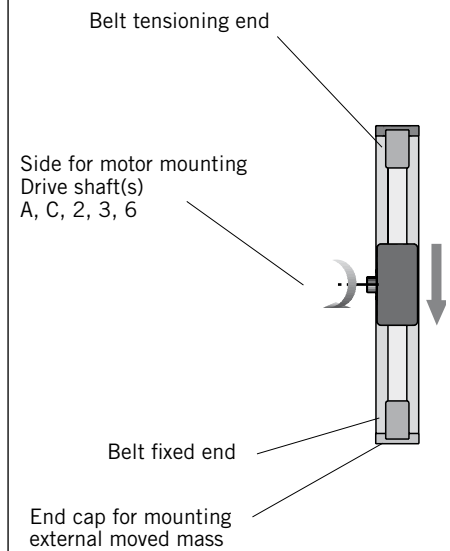

Accessories - please order separately

Description	Page
Motor mounting	135
Multi-axis system for actuators	177 ff

OSP-E..B Belt Actuator with Internal Plain Bearing Guide



Contents

Description	Page
Overview	40
Technical Data	43
Dimensions	48
Order Instructions	50

BELT ACTUATOR WITH INTERNAL PLAIN BEARING GUIDE FOR POINT-TO-POINT APPLICATIONS

A completely new generation of actuators which can be integrated into any machine layout neatly and simply.

Advantages



- Precise path and position control
- High speed operation
- Easy installation
- Low maintenance
- Ideal for precise point-to-point applications



Features

- Integrated drive and guidance system
- Tandem configuration with increased carrier distance for higher moment supports
- Long available strokes
- Complete motor and control packages
- Diverse range of accessories and mountings
- Bi-parting and special options available



Take the easy route and load all the dimensions into your system. The file is suitable for all current CAD systems – available on CD-Rom or at www.parker-origa.com

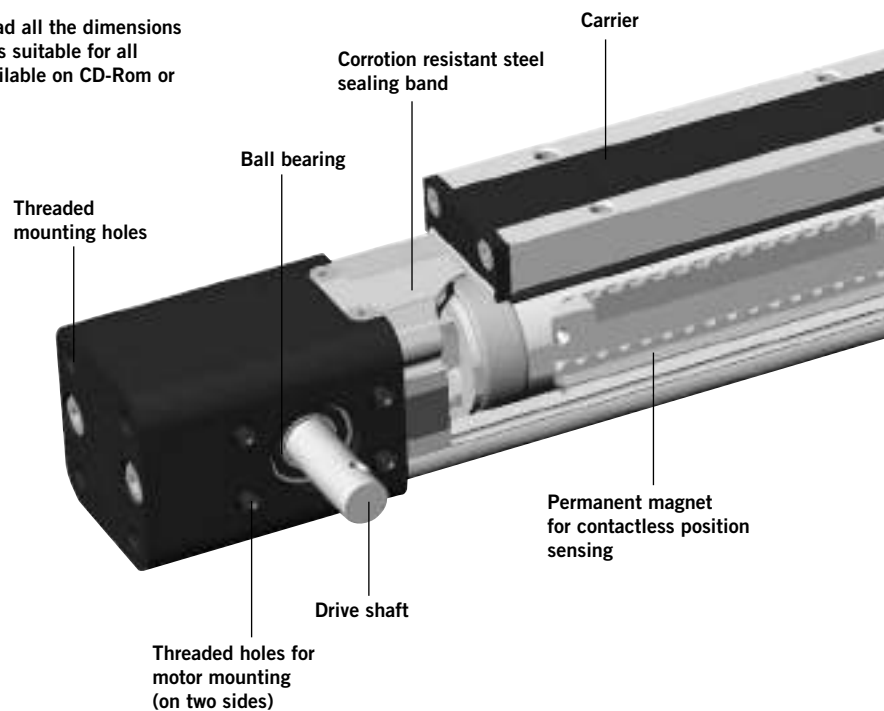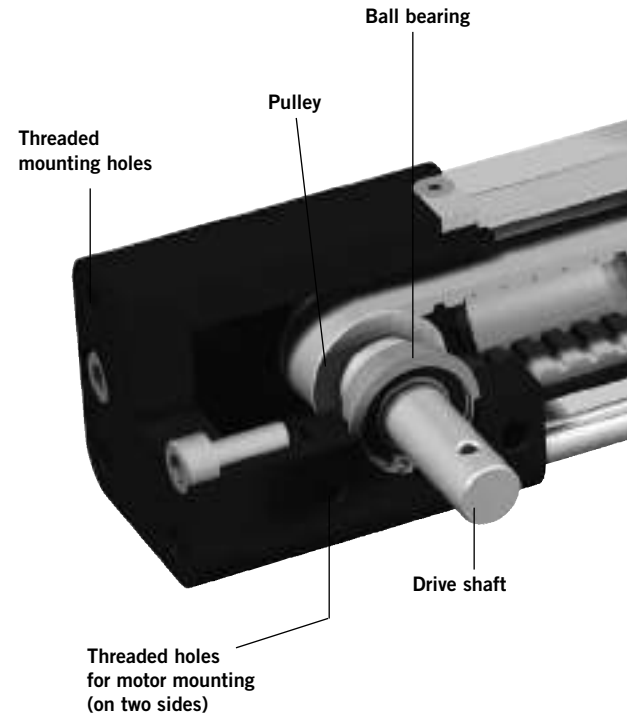

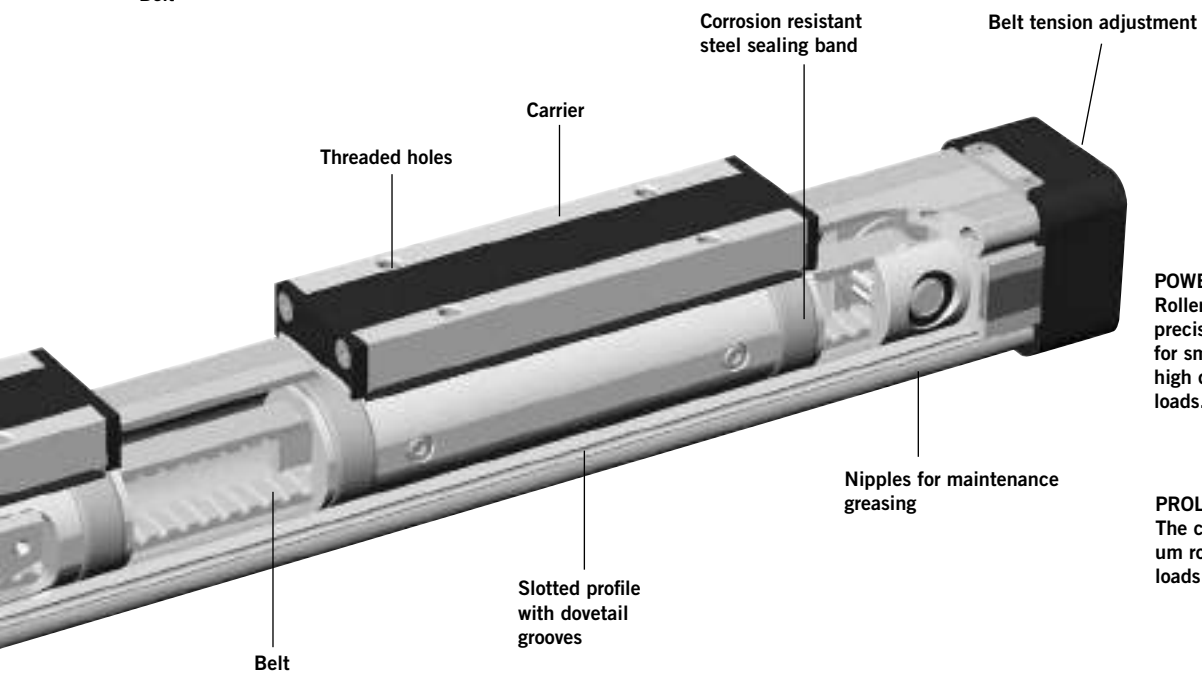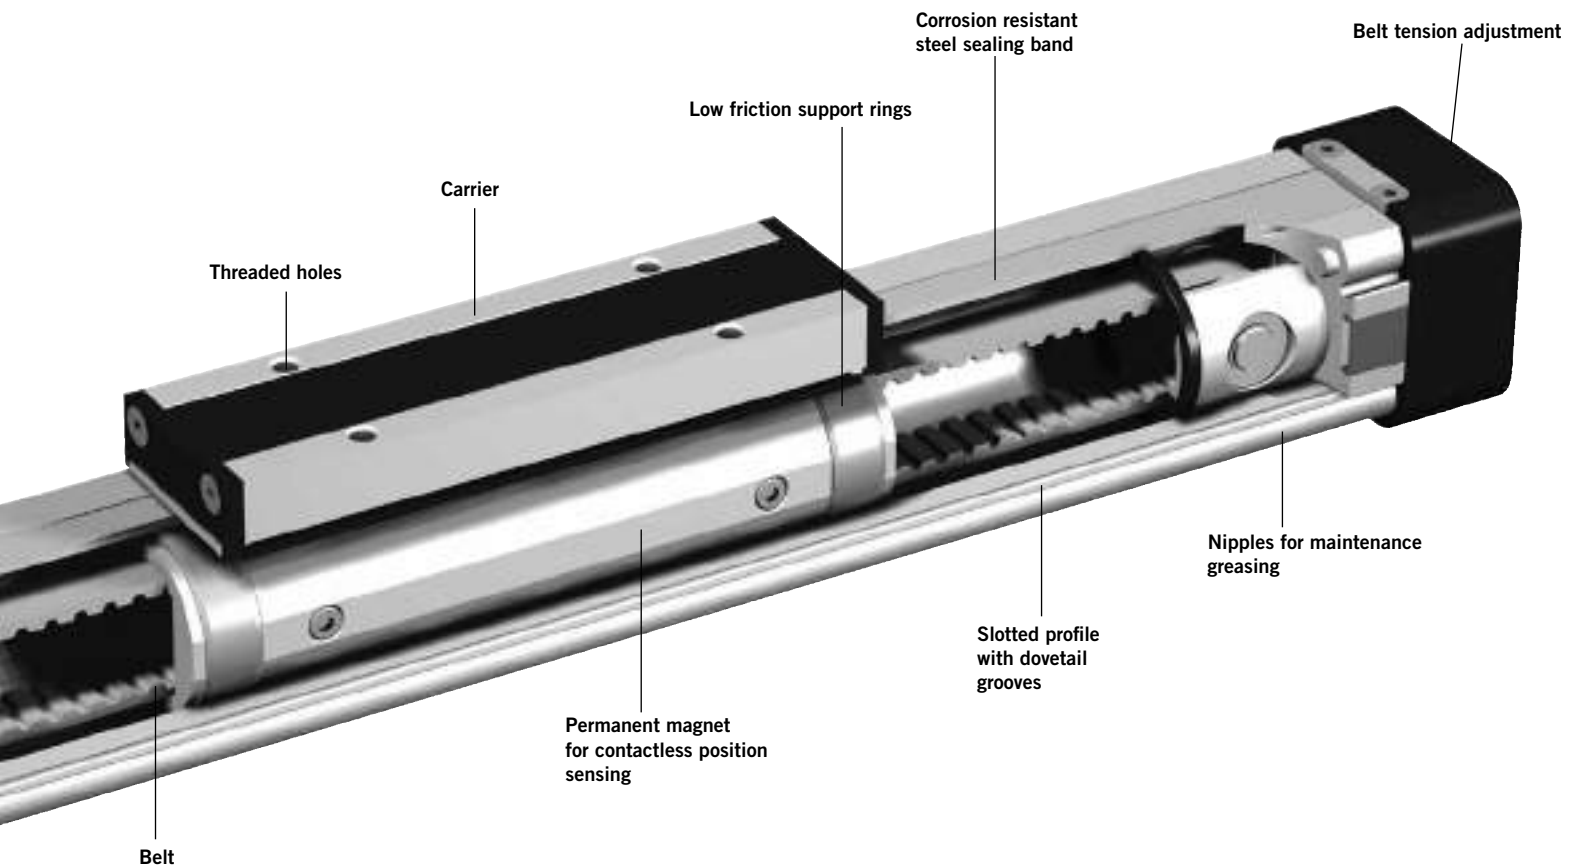


POWERSLIDE
Roller bearing precision guidance for smooth travel and high dynamic or static loads.




PROLINE
The compact aluminium roller guide for high loads and velocities.



Tandem configuration with increased carrier distance for higher moment supports.
Bi-parting version for precise synchronized movements

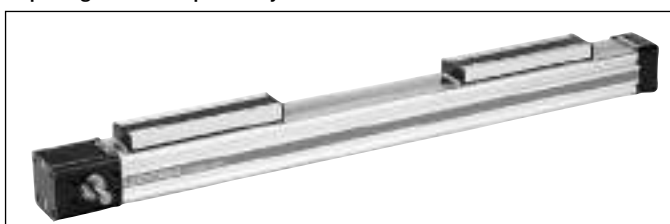

The dovetailed mounting rails of the new actuator expand its function into that of a universal system carrier. Modular system components are simply clamped on.




OPTIONS AND ACCESSORIES

OSP-E..B BELT ACTUATOR WITH INTERNAL PLAIN BEARING GUIDE


STANDARD VERSIONS OSP-E..B

Carrier with internal guidance and magnet packet for contactless position sensing. Dovetail profile for mounting of accessories and the actuator itself.

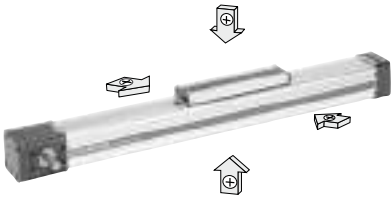

DRIVE SHAFT VERSIONS

- Plain shaft or
- double plain shaft (Option)
e.g. to drive two actuators in parallel.



OPTIONS

TANDEM

For higher moment support.




BI-PARTING

For perfectly synchronised bi-parting movements.



ACCESSORIES

MOTOR MOUNTING




END CAP MOUNTING

For end-mounting of the actuator.




PROFILE MOUNTING

For supporting long actuators or mounting the actuator on the dovetail grooves.

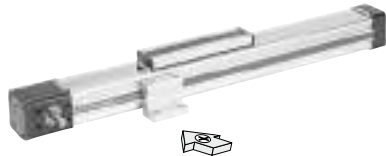


CLEVIS MOUNTING

Carrier with tolerance and parallelism compensation to drive external linear guides.

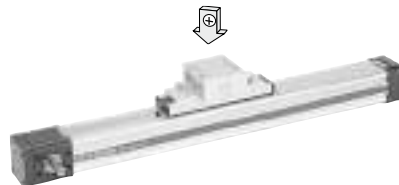

INVERSION MOUNTING

The inversion mounting, mounted on the carrier, transfers the driving force to the opposite side, e.g. for dirty environments.

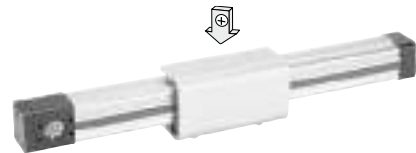

MAGNETIC SWITCHES SERIES RST AND EST

For contactless position sensing of end stop and intermediate carrier positions.



Characteristics			
Characteristics	Symbol	Unit	Description
General Features			
Series			OSP-E..B
Name			Belt Actuator with internal Plain Bearing Guide
Mounting			See drawings
Temperature range	ϑ_{\min} ϑ_{\max}	$^{\circ}\text{C}$ $^{\circ}\text{C}$	-30 +80
Weight (mass)		kg	See table
Installation			See table
Material	Slotted profile		Extruded anodized aluminium
	Belt		Steel-corded polyurethane
	Pulley		Aluminium
	Guide bearings		Low friction plastic
	Sealing band		Hardened corrosion resistant steel
	Screws, nuts		Zinc plated steel
	Mountings		Zinc plated steel and aluminium
Encapsulation class	IP	54	

Weight (mass) and Inertia					
Series	at stroke 0 m	Weight (mass) [kg]		Inertia [$\times 10^{-6}$ kgm ²]	
		ad per meter stroke	moving mass	at stroke 0 m	ad per meter stroke
OSP-E25B	0.9	1.6	0.2	25	6.6
OSP-E32B	1.9	3.2	0.4	43	10
OSP-E50B	5.2	6.2	1.0	312	45
OSP-E25B*	1.2	1.6	0.5	48	6.6
OSP-E32B*	2.3	3.2	0.8	83	10
OSP-E50B*	6.3	6.2	2.1	585	45

* Version: Tandem and Bi-parting (Option)

Installation Instructions

Use the threaded holes in the end cap for mounting the actuator. See if Profile Mountings are needed using the maximum allowable unsupported length graph on page 45. At least one end cap must be secured to prevent axial sliding when profile mounting is used.

When the actuator is moving an externally guided load, the compensation must be used.

The actuators can be fitted with the standard carrier mounting facing in any direction.

To prevent contamination such as fluid ingress, the actuator should be fitted with its sealing band facing downwards. The inversion mounting can be fitted to transfer the driving force to the opposite side.

Maintenance

All moving parts are long-term lubricated for a normal operational environment. Parker Origa recommends a check and lubrication of the actuator, and if necessary a change of the belt and wear parts, after an operation time of 12 months of operation or 3 000 km travel of distance.

Additional greasing is easily done by using nipples in the slotted profile. Please refer to the operating instructions supplied with the actuator.

First service start-up

The maximum values specified in the technical data sheet for the different products must not be exceeded. Before taking the actuator as a machine into service, the user must ensure the adherence to the EC Machine Directive 2006/42/EG.


OSP-E..B Belt Actuator with internal Plain Bearing Guide

Size 25, 32, 50




Standard Versions:

- Standard carrier with internal plain bearing guide
- Dovetail profile for mounting of accessories and the actuator itself
- Position of Drive Shafts



Options:

- Tandem-Version
- Bi-parting version for synchronized movements
- Drive shaft with double plain shaft



Sizing Performance Overview

Maximum Loadings

Sizing of Actuator

The following steps are recommended for selection:

1. Required acceleration,
2. Required torque is shown on page 46 and 47.
3. Check that maximum values in the table 3 are not exceeded
4. Drive shaft by using table T2. (Pay attention to note under table) If value is lower than required, overview the moving profile or select if possible a bigger unit.
5. Before sizing and specifying the motor, the average torque must be calculated using the cycle time of the application.
6. Check that the maximum allowable unsupported length is not exceeded (see on page 45).

Performance Overview					
Characteristics	Unit	Description			
Size		OSP-E25B	OSP-E32B	OSP-E50B	
Max. speed	[m/s]	2	3	5	
Linear motion per revolution, drive shaft	[mm]	60	60	100	
Max. rpm drive shaft	[min ⁻¹]	2 000	3 000	3 000	
Max. effective action force F_A at speed	< 1 m/s:	[N]	50	150	425
	1- 2 m/s:	[N]	50	120	375
	> 2 m/s:	[N]	–	100	300
No-load torque	[Nm]	0.4	0.5	0.6	
Max. acceleration/deceleration	[m/s ²]	10	10	10	
Repeatability	[mm/m]	±0.05	±0.05	±0.05	
Max. stroke length OSP-E..B	[mm]	3000	5000	5000	
Max. stroke length OSP-E..B*	[mm]	2 x 1500	2 x 2500	2 x 2500	

* Bi-parting version

Maximum Permissible Torque on Drive Shaft Speed / Stroke

T2

OSP-E25B				OSP-E32B				OSP-E50B			
Speed [m/s]	Torque [Nm]	Stroke [m]	Torque [Nm]	Speed. [m/s]	Torque [Nm]	Stroke [m]	Torque [Nm]	Speed. [m/s]	Torque [Nm]	Stroke [m]	Torque [Nm]
1	0.9	1	0.9	1	2.3	1	2.3	1	10.0	1	10.0
2	0.9	2	0.9	2	2.0	2	2.3	2	9.5	2	10.0
		3	0.9	3	1.8	3	2.3	3	9.0	3	9.0
						4	2.3	4	8.0	4	7.0
						5	1.8	5	7.5	5	6.0


Important:

The maximum permissible torque on the drive shaft is the lowest value of the speed- or stroke-dependent torque value.

Example above:

OSP-E32B stroke 2 m, required speed 3 m/s;
From table T2: speed 3 m/s gives 1.8 Nm and stroke 2 m gives 2.3 Nm.
Max. torque for this application is 1.8 Nm.

Forces, loads and moments

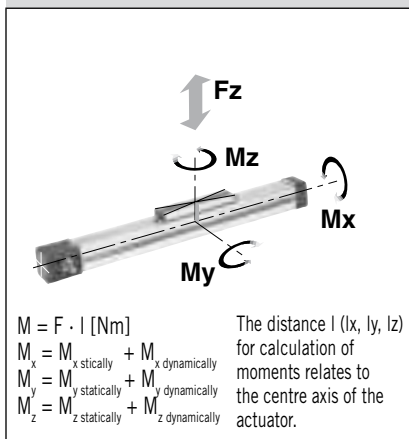

Combined Loads

If the actuator is subjected to several forces, loads and moments at the same time, the maximum load is calculated with the equation shown here.

The maximum permissible loads must not be exceeded.

Maximum Permissible Loads

T3

Series	Max. applied load Fz [N]	Max. moments [Nm]		
		Mx	My	Mz
OSP-E25B	160	2	12	8
OSP-E32B	300	8	25	16
OSP-E50B	850	16	80	32
OSP-E..B Bi-partional	The maximum load F must be equally distributed among the two carriers.			



Equation for Combined Loads

$$\frac{F_z}{F_z(\max)} + \frac{M_x}{M_x(\max)} + \frac{M_y}{M_y(\max)} + \frac{M_z}{M_z(\max)} \leq 1$$



The total of the loads must not exceed >1 under any circumstances.

Maximum permissible unsupported length – Placing of Profile Mounting


Series OSP-E..B

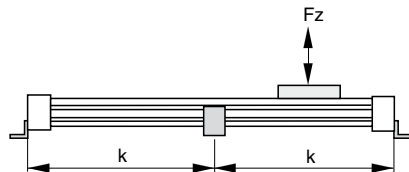

Series OSP-E..B
Bi-parting version

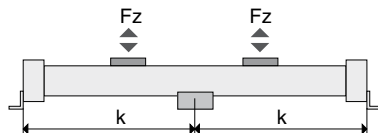

k = Maximum permissible distance between mountings/mid-section support for a given load F.

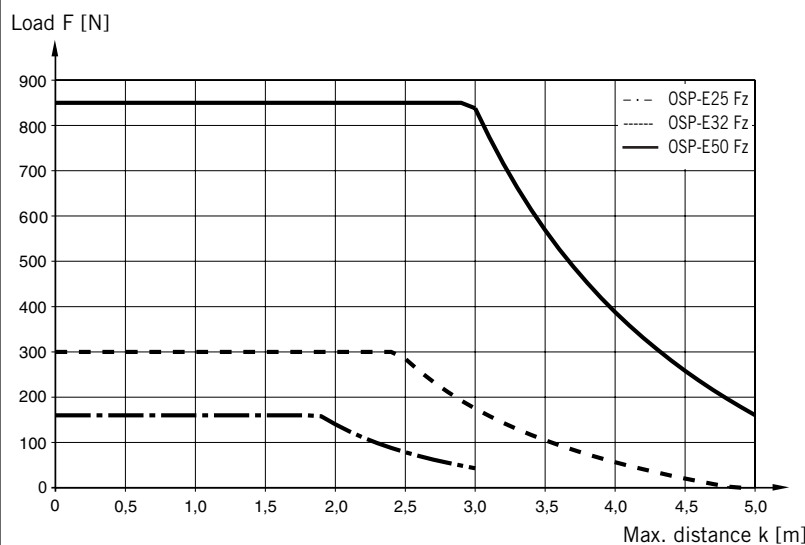

(Up to the curve in the above graph the deflection will be max. 0.2 % of distance k)

Maximum Permissible Unsupported Length

Stroke Length

The stroke lengths of the actuators are available in multiples of 1 mm up to max.

OSP-E25B: 3 m / 2 x 1.5 m *

OSP-E32B: 5 m / 2 x 2.5 m *

OSP-E50B: 5 m / 2 x 2.5 m *

* Version: Bi-partial

Other stroke lengths are available on request.

The end of stroke must not be used as a mechanical stop.

Allow an additional safety clearance at both ends equivalent to the linear movement of one revolution of the drive shaft.

The use of an AC motor with frequency converter normally requires a larger safety clearance than that required for servo systems.


For advise, please contact your local Parker Origa technical support department.

Mounting on the Drive Shaft

Do not expose the drive shaft to uncontrolled axial or radial forces when mounting coupler or pulley, a steadying block should be used.

Pulley

Minimum allowable number of teeth Z (AT5) at maximum applied torque.

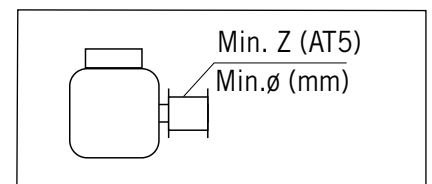

Series	Min. Z	Min. ø
OSP-E25B	24	38
OSP-E32B	24	38
OSP-E50B	36	57

Required Acceleration


Distance / Time Graph

Using the required travel distance and total time, the adjacent graphs show the required acceleration based on maximum speed.


The graphs assume that acceleration and deceleration are equal.

Please note that specifying non-essential high acceleration or short cycle time will result in an oversized motor.


Max. speed 1 m/s

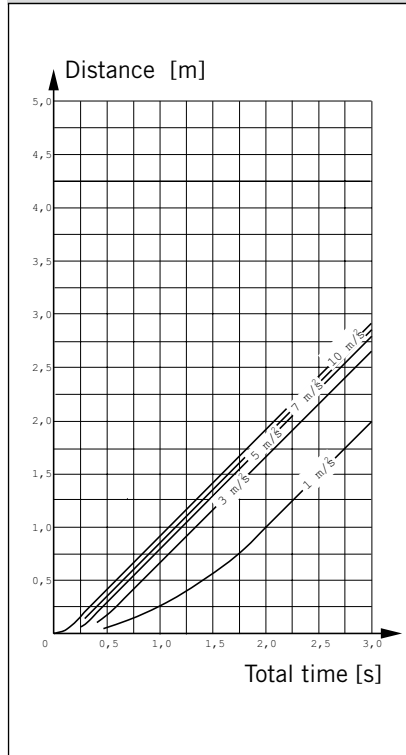


Max. speed 2 m/s

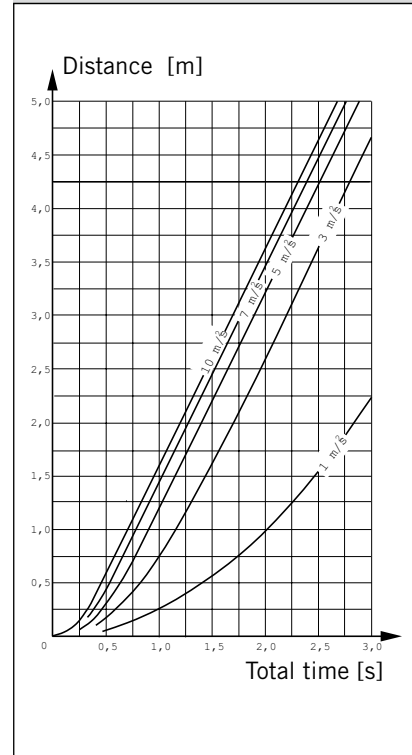

Max. speed 3 m/s

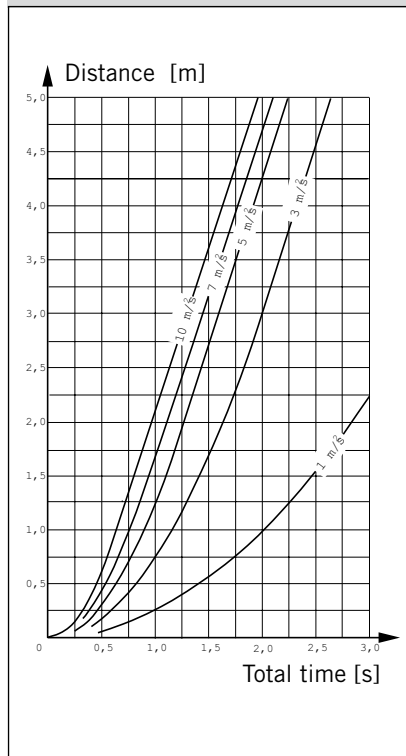


Max. speed 5 m/s

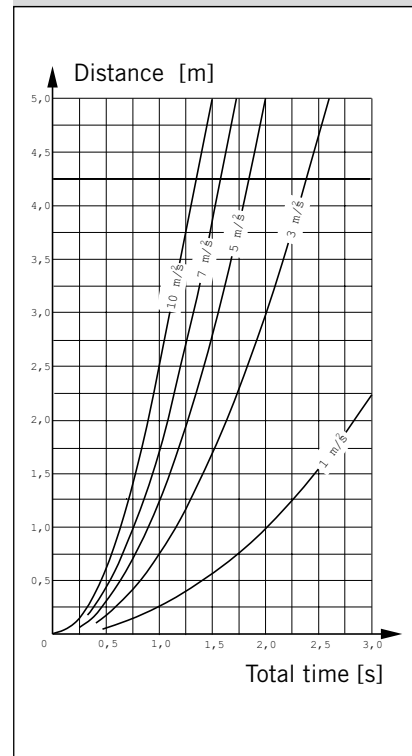


Required Torque / Mass

**Size OSP-E25B,
Horizontal Application**

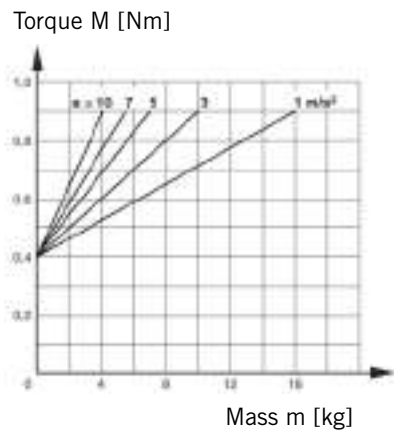


**Size OSP-E25B,
Vertical Application**

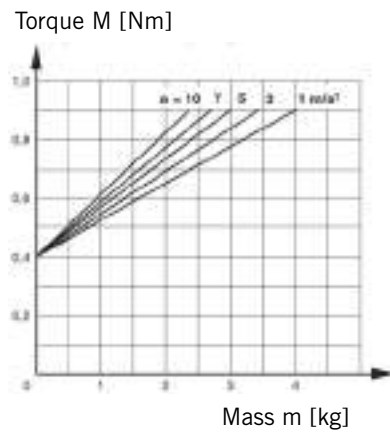


Using the known mass, the direction of the application and the required acceleration from the distance-time graphs, the actuator can be sized and the required torque is shown in the adjacent graphs. Mass in graphs = Load + moving mass of the actuator (according to the weight chart on data sheet 43 ff).

**Size OSP-E32B,
Horizontal Application**

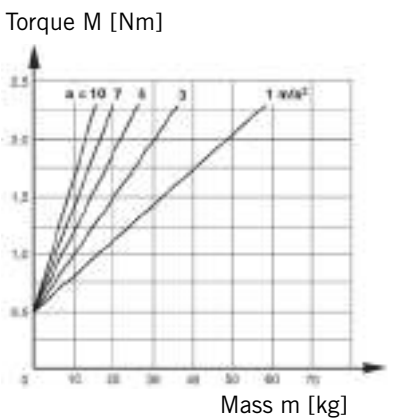


**Size OSP-E32B,
Vertical Application**

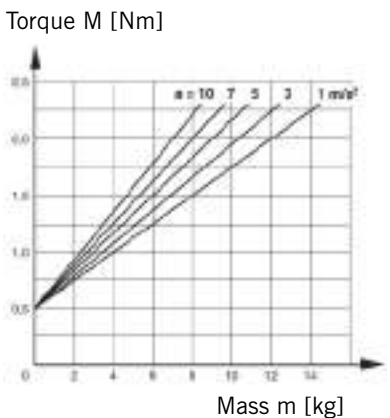


Please note:

When using an additional guide, please add the mass of the carriage to the total moving mass.


**Size OSP-E50B,
Horizontal Application**

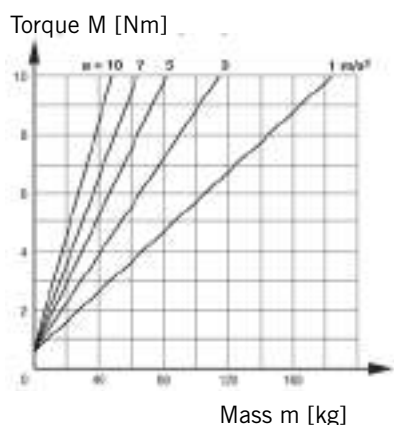

**Size OSP-E50B,
Vertical Application**

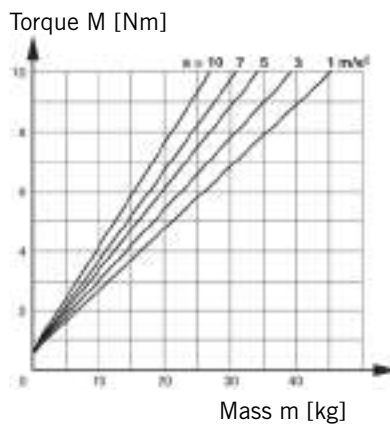


OSP-E..B
Belt Actuator with Internal Plain Bearing Guide- Basic Unit

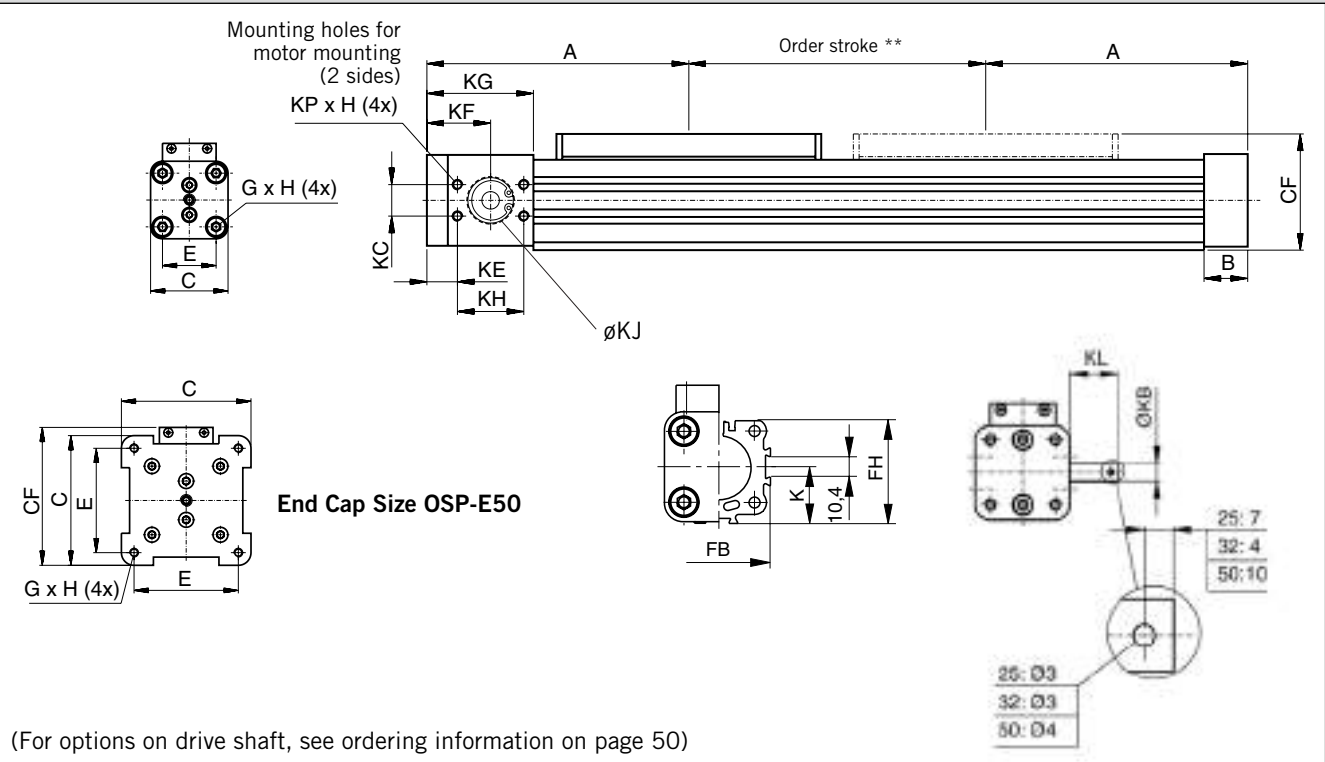


*** Note:**
 The mechanical end position must not be used as a mechanical end stop. Allow an additional safety clearance at both ends equivalent to the linear movement of one revolution of the drive shaft, but at least 100 mm.
 Order stroke = required travel + 2 x safety distance.
 The use of an AC motor with frequency converter normally requires a larger safety clearance than that required for servo systems.
 For further information please contact your local Parker Origa representative.

Option – Tandem

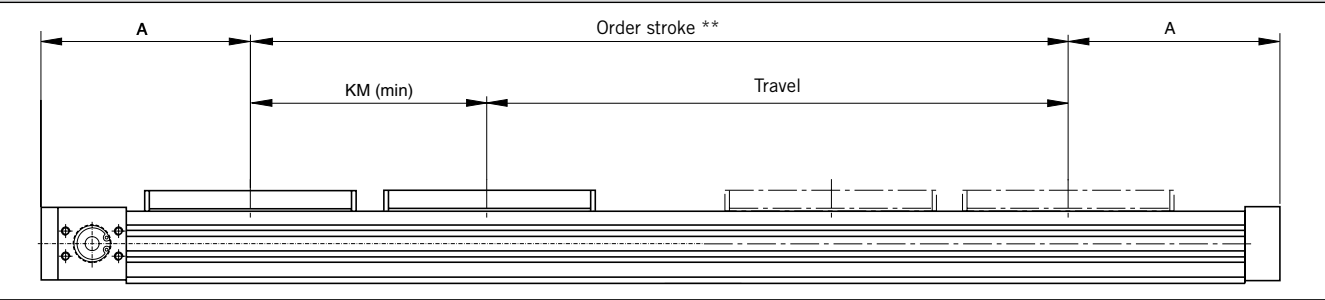


** Order stroke = required travel + KM min + 2 x safety distance

Option – Bi-parting

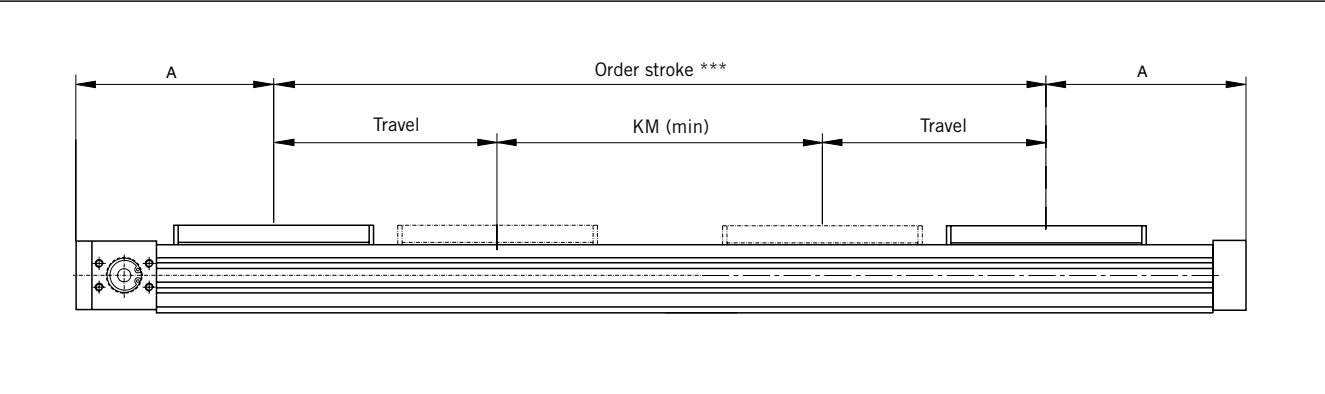

*** Order stroke = 2 x required travel + KM min + 2 x safety distance

Standard Carrier

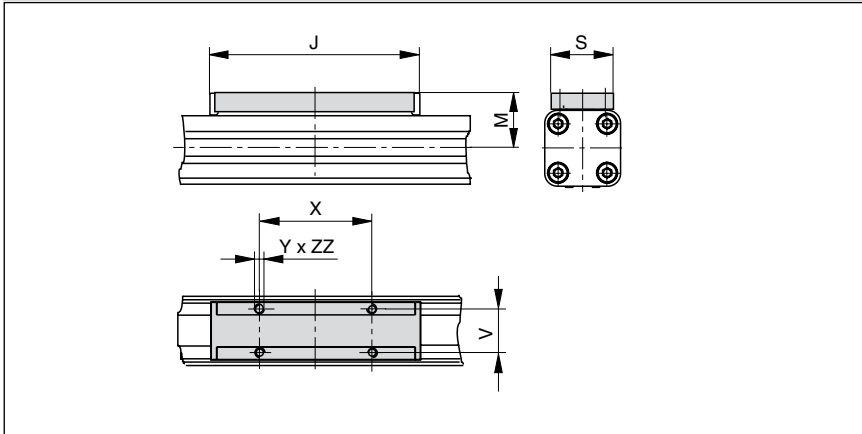

Dimension Table [mm]

Series	A	B	C	E	G x H	J	K	M	S	V	X	Y	CF
OSP-E25B	125	22	41	27	M5 x 10	117	21.5	31	33	25	65	M5	52.5
OSP-E32B	150	25	52	36	M6 x 12	152	28.5	38	36	27	90	M6	66.5
OSP-E50B	200	25	87	70	M6 x 12	200	43.0	49	36	27	110	M6	92.5




Series	FB	FH	KB	KC	KE	KF	KG	KH	KJ	KL	KM _{min}	KM _{recc.}	KP x H	ZZ
OSP-E25B	40	39.5	10 _{j6}	15	22.0	37.0	57	30	19 ^{H7}	24	130	190	M5 x 10	8
OSP-E32B	52	51.7	10 _{j6}	18	17.5	36.5	61	38	26 ^{H7}	26	170	230	M6 x 12	10
OSP-E50B	76	77.0	16 _{h8}	32	23.5	48.5	85	50	40 ^{H7}	34	220	320	M8 x 16	10

Order Instructions	OSPE25	—	0	0	0	0	0	—	00000	—	0	0	0	0	0	0
---------------------------	--------	---	---	---	---	---	---	---	-------	---	---	---	---	---	---	---

Size of actuator	
25	Size 25
32	Size 32
50	Size 50

Type of actuator	
0	Belt actuator with internal plain bearing guide

Carriage	
0	Standard
1*	Tandem
2*	Bi-parting

Drive shaft / motor mounting position		
0	Plain shaft / motor standard	
1	Plain shaft / motor 180° standard	
2*	Double plain shaft	

* Option

Gear mounting*				
Size		25	32	50
0	without	x	x	x
1	LP050 i = 5	x	x	
2	LP050 i = 10	x	x	
3	LP070 i = 3		x	x
4	LP070 i = 5		x	x
5	LP070 i = 10		x	x

Info: For gears the mounting kit of the motor must be specified.

LP050: A0, A1, A2

LP070: A1, A2, A3

Order stroke
5 digits input in mm

Mounting Kit for Motor and Gear				
Size		25	32	50
0 -	without	x	x	x
A 0	SY563T	x	x	
A 1	SY873T	x	x	x
A 2	SMx60 xx xxx 8 11 ...	x	x	
A 3	SMx82 xx xx 8 14 ...		x	x
A 4	SMx100 xx xx 5 19...			x
A 7	PS60		x	x
C 0	LP050 / PV40-TA	x	x	
C 1	LP070 / PV60-TA		x	x

Info: Motor and Gear mounting dimensions see page 193

Guide position		
0	Standard	
1	180° Standard	
0	Standard	
1	180° Standard	
0	Standard	
1	180° Standard	

External guide / carriage mounting*	
0	Without
6	PL Proline
E	PS Power slide 25/25
F	PS Power slide 25/35, 32/35
G	PS Power slide 25/44, 32/44
H	PS Power slide 50/60
I	PS Power slide 50/76
M	Inversion
R	Compensation
S	Compensation low back lash
see page 99 ff	

Niro	
0	Standard
1*	Niro

* Option

Accessories - please order separately	
Description	Page
Motor mounting	136 ff
Multi-axis system for actuators	177 ff

Magnetic switches *	
0	Without
1	1 pc. RST-K 2NO / 5m cable
2	1 pc. RST-K 2NC / 5m cable
3	2 pc. RST-K 2NC / 5m cable
4	2 pc. RST-K 2NC, 1 pc. RST-K 2NO / 5m cable
5	1 pc. RST-S 2NO / M8 plug
6	1 pc. RST-S 2NC / M8 plug
7	2 pc. RST-S 2NC / M8 plug
8	2 pc. RST-S 2NC, 1 pc. RST-S 2NO / M8 plug
A	1 pc. EST-S NPN / M8 plug
B	2 pc. EST-S NPN / M8 plug
C	3 pc. EST-S NPN / M8 plug
D	1 pc. EST-S PNP / M8 plug
E	2 pc. EST-S PNP / M8 plug
F	3 pc. EST-S PNP / M8 plug
see page 165 ff	

Profile mounting *	
0	Without
1	1 pair type E1
2	1 pair type D1
3	1 pair type MAE
4	2 pair type E1
5	2 pair type D1
6	2 pair type MAE
7	3 pair type E1
8	3 pair type D1
9	3 pair type MAE
K	1 pair type E2
L	1 pair type E3
M	1 pair type E4
N	2 pair type E2
P	2 pair type E3
Q	2 pair type E4
R	3 pair type E2
S	3 pair type E3
T	3 pair type E4
see pages 147 ff and 161 ff	

End cap mounting *	
0	Without
1	1 pair type A1 (size 25 and 32) or C1 (size 50)
2	1 pair type A2 (size 25 and 32) or C2 (size 50)
3	1 pair type A3 (size 25 and 32) or C3 (size 50)
4	1 pair type B1 (size 25 and 32) or C4 (size 50)
5	1 pair type B4 (size 25 and 32)
see pages 147 and 161 ff	

OSP-E..SB Ball Screw Actuator with Internal Plain Bearing Guide



Contents

Description	Page
Overview	54
Technical Data	57
Dimensions	62
Order Instructions	64

BALL SCREW ACTUATOR WITH INTERNAL PLAIN BEARING GUIDE FOR HIGH ACCURACY APPLICATIONS


A completely new generation of actuators which can be integrated into any machine layout neatly and simply.

Advantages

- Accurate path and position control
- High force output
- Easy installation
- Excellent slow speed characteristics
- Ideal for precise traverse operations (e.g. machine feeds) and lifting applications

Features

- Integrated drive and guidance system
- Complete motor and control packages
- Diverse range of accessories and mountings
- Optimal screw pitches (5, 10, 25 mm)

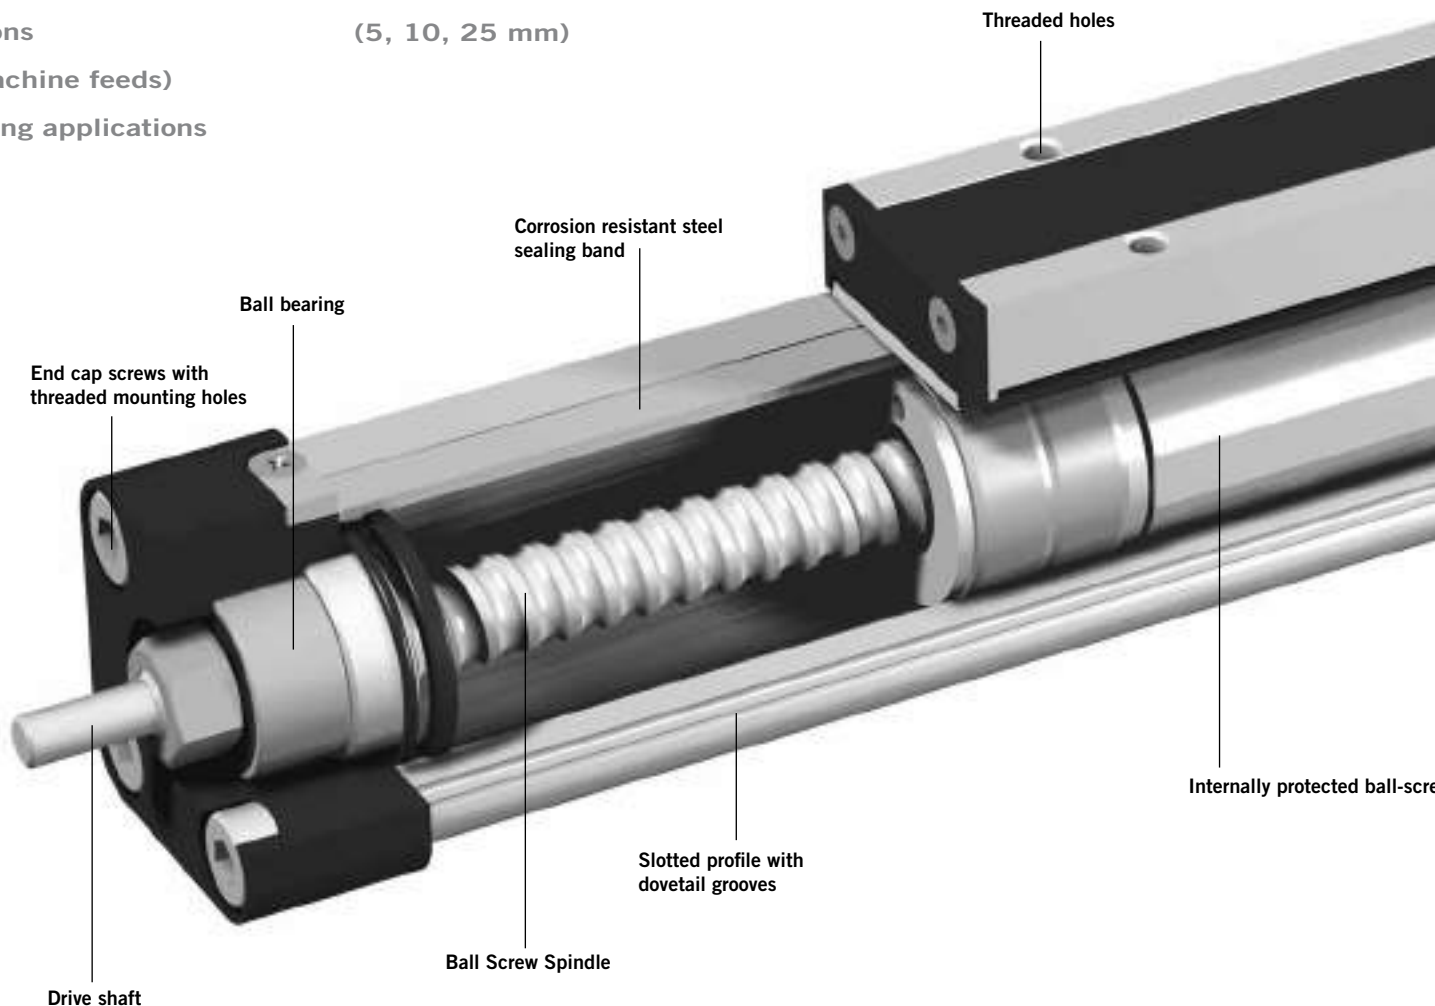


Clean Room-Version
certified to DIN EN ISO 14644-1



Carrier

Low friction support rings

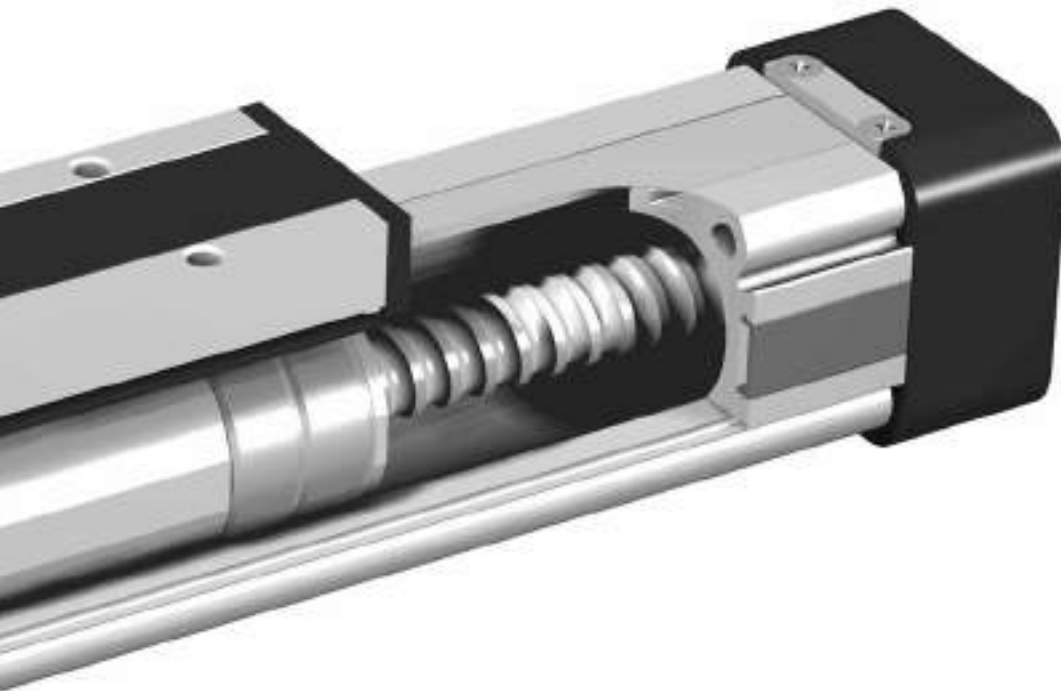

SLIDELINE
Combination with
linear guides
provides for heavier
loads.



POWERSLIDE
Roller bearing
precision guidance
for smooth travel and
high dynamic or static
loads.



PROLINE
The compact
aluminium roller
guide for high loads
and velocities.



Heavy Duty guide HD
linear guides for heavy
duty applications




SFI-plus
displacement
measuring system



ew nut

sions into your system. The file is suitable
for all current CAD systems – available on
CD-Rom or at www.parker-origa.com

mounting rails
ator expand its
function into that of a universal
system carrier.
Modular system components are
simply clamped on.




OPTIONS AND ACCESSORIES

OSP-E..SB BALL SCREW ACTUATOR WITH INTERNAL PLAIN BEARING GUIDE

STANDARD VERSION OSP-E..SB

Standard carrier with internal guidance and integrated magnet set for contactless position sensing. Dovetail profile for mounting of accessories and the actuator itself.

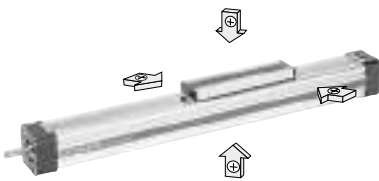

BALL SCREW PITCH

The ball screws spindles are available in various pitches:

- OSP-E25SB: 5 mm
- OSP-E32SB: 5, 10 mm
- OSP-E50SB: 5, 10, 25 mm

OPTIONS

TANDEM

For higher moment support.



CLEAN ROOM

certified to DIN EN ISO 14644-1



ACCESSORIES

MOTOR MOUNTINGS




END CAP MOUNTING

For end-mounting of the actuator.




PROFILE MOUNTING

For supporting long actuators or mounting the actuator on the dovetail grooves.




CLEVIS MOUNTING

Carrier with tolerance and parallelism compensation to drive external linear guides.

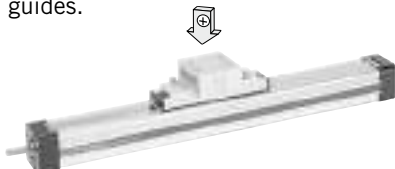


INVERSION MOUNTING

The inversion mounting, mounted on the carrier, transfers the driving force to the opposite side, e.g. for dirty environments.

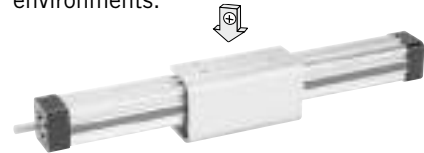

MAGNETIC SWITCHES SERIES RST AND EST

For contactless position sensing of end stop and intermediate carrier positions.

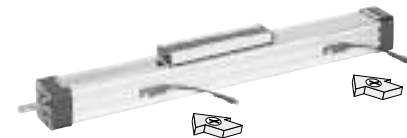

MEASURING SYSTEM - SFI-PLUS

Incremental measuring system with practically relevant resolution.



OSP-E..SB Ball Screw Actuator with internal Plain Bearing Guide Size 25, 32, 50



Characteristics			
Characteristics	Symbol	Unit	Description
General Features			
Series			OSP-E..SB
Name			Ball Screw Actuator with internal Plain Bearing Guide
Mounting			See drawings
Temperature Range	ϑ_{\min} ϑ_{\max}	°C °C	-20 +80
Weight (mass)		kg	See table
Installation			In any position
Material	Slotted profile		Extruded anodized aluminium
	Ball screw		Hardened steel
	Ball screw nut		Hardened steel
	Guide bearings		Low friction plastic
	Sealing band		Hardened, corrosion resistant steel
	Screws, nuts		zinc plated steel
	Mountings		zinc plated steel and aluminium
Encapsulation class		IP	54

Weight (mass) and Inertia					
Series	At stroke 0 m	Weight (mass) [kg]		Inertia [$\times 10^{-6}$ kgm ²]	
		Add per metre stroke	Moving mass	At stroke 0 m	Add per metre
OSP-E25SB	0.8	2.3	0.2	2.2	11
OSP-E32SB	2.0	4.4	0.4	8.4	32
OSP-E50SB	5.2	9.4	1.2	84.0	225

Installation Instructions

Use the threaded holes in the free end cap and a Profile Mounting close to the motor end for mounting the actuator.

See if Profile Mountings are needed using the maximum permissible unsupported length graph on page 59. At least one end cap must be secured to prevent axial sliding when Profile Mounting is used.

When the actuator is moving an externally guided load, the Compensation must be used (see page 109). The actuators can be fitted with the standard carrier mounting facing in any direction.

To prevent contamination such as fluid ingress, the actuator should be fitted with its sealing band facing downwards.

The inversion mounting can be fitted to transfer the driving force to the opposite side.

Maintenance

All moving parts are long-term lubricated for a normal operational environment. Parker Origa recommends a check and lubrication of the actuator, and if necessary a change of wear parts, after an operation time of 12 months or 3000 km travel of distance. Please refer to the operating instructions supplied with the actuator.

First service start-up

The maximum values specified in the technical data sheet for the different products must not be exceeded. Before taking the actuator as a machine into service, the user must ensure the adherence to the EC Machine Directive 2006/42/EG.

Standard Versions:

- Standard carrier with internal plain bearing guide
- Dovetail profile for mounting of accessories and the actuator itself
- Pitches of Ball Screw Spindle
Type OSP-E25 : 5 mm
Type OSP-E32: 5 , 10 mm
Type OSP-E50: 5 , 10 , 25 mm

Options:

- Tandem-Version
- Clean room-version, according to DIN EN ISO 14644-1
- Displacement Measuring System SFI-plus



Sizing Performance Overview

Maximum Loadings


Sizing of Actuator

The following steps are recommended for selection :

1. Recommended maximum acceleration is shown in graphs on page 61.
2. Required torque is shown in graphs
3. Check that maximum values in the adjacent charts are not exceeded.
4. When sizing and specifying the motor, the RMS-average torque must be calculated using the cycle time of the application.
5. Check that the maximum allowable unsupported length is not exceeded (see on page 59 ff)

Performance Overview							
Characteristics	Unit	Description					
Series		OSP-E25SB		OSP-E32SB		OSP-E50SB	
Pitch	[mm]	5	5	10	5	10	25
Max. speed	[m/s]	0.25	0.25	0.5	0.25	0.5	1.25
Linear motion per revolution drive shaft	[mm]	5	5	10	5	10	25
Max. rpm, drive shaft	[min ⁻¹]	3 000	3 000		3 000		
Max. effective action force F _A	[N]	250	600		1 500		
Corresponding torque on drive shaft	[Nm]	0.35	0.75	1.3	1.7	3.1	7.3
No-load torque	[Nm]	0.2	0.2	0.3	0.3	0.4	0.5
Max. allowable torque on drive shaft	[Nm]	0.6	1.5	2.8	4.2	7.5	20
Repeatability	[mm/m]	±0.05		±0.05		±0.05	
Max. Standard stroke length	[mm]	1100	2000		3200		

Forces, loads and moments

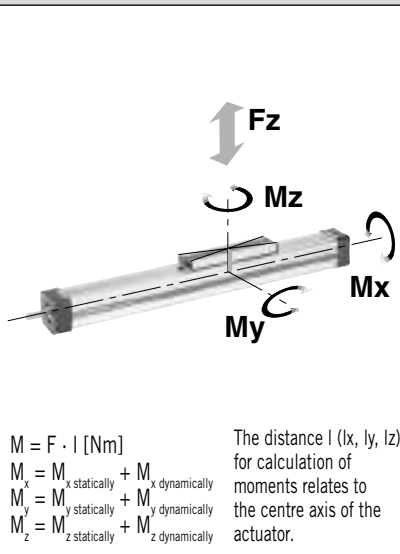

Combined Loads

If the actuator is subjected to several forces, loads and moments at the same time, the maximum load is calculated with the equation shown here.

The maximum permissible loads must not be exceeded.

Maximum permissible Loads


Series	Max. applied load [N] Fz	Max. moments [Nm]		
		Mx	My	Mz
OSP-E25SB	500	2	12	8
OSP-E32SB	1200	8	25	16
OSP-E50SB	3000	16	80	32

Equation for combined loads


$$\frac{F_z}{F_z \text{ (max)}} + \frac{M_x}{M_x \text{ (max)}} + \frac{M_y}{M_y \text{ (max)}} + \frac{M_z}{M_z \text{ (max)}} \leq 1$$

The total of loads must not exceed >1 under any circumstances.

Maximum Permissible Unsupported Length – Placing of Profile Mounting

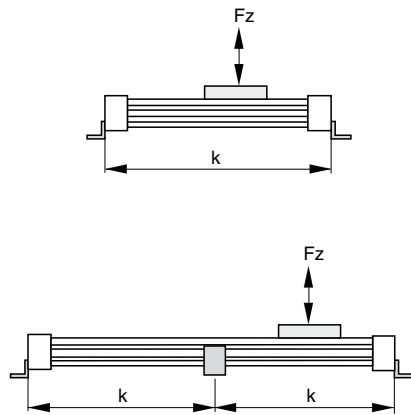

k = Maximum permissible distance between mountings/mid-section support for a given load F .

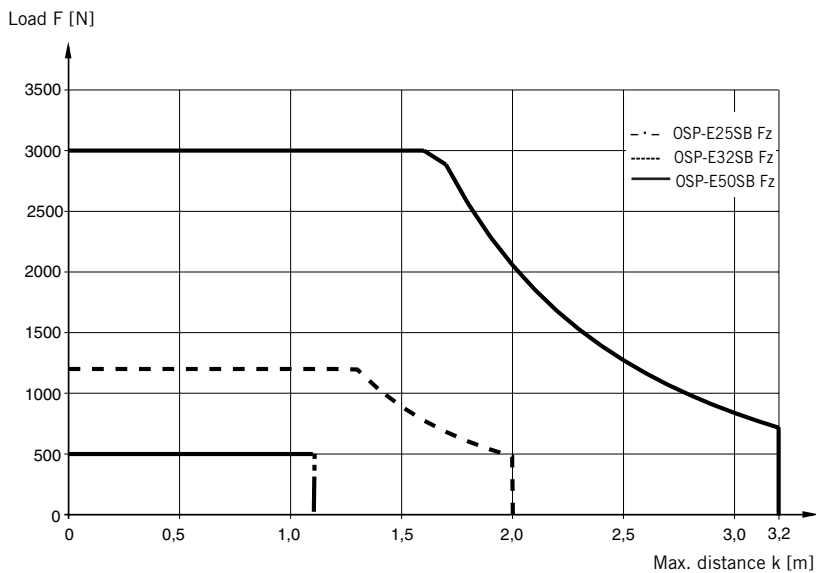

(Up to the curve in the above graph the deflection will be max. 0.2 % of distance k .)

Maximum Permissible Unsupported Length

Stroke Length

The stroke lengths of the actuators are available in multiples of 1 mm up to above maximum stroke lengths.

OSP-E25SB: max. 1100 mm

OSP-E32SB: max. 2000 mm

OSP-E50SB: max. 3200 mm

Other stroke lengths are available on request.

The end of stroke must not be used as a mechanical stop.

Allow an additional safety clearance of minimum 25 mm at both ends.

The use of an AC motor with frequency converter normally requires a larger safety clearance than that required for servo systems.


For advice, please contact your local Parker Origa technical support department.

Mounting on the Drive Shaft

Do not expose the drive shaft to uncontrolled axial or radial forces when mounting coupling or pulley, a steadying block should be used.

Pulleys

Minimum allowable number of teeth (AT5) and diameter of pulley at maximum applied torque.

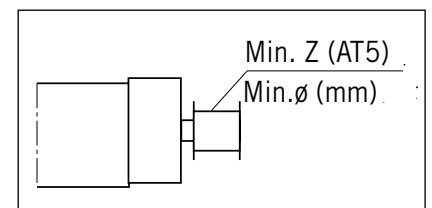


Size	Min. Z	Min. ø
OSP-E25SB	24	38
OSP-E32SB	24	38
OSP-E50SB	36	57

Maximum rpm / Stroke

At longer strokes the speed has to be reduced according to the adjacent graphs.


Maximum rpm / Stroke

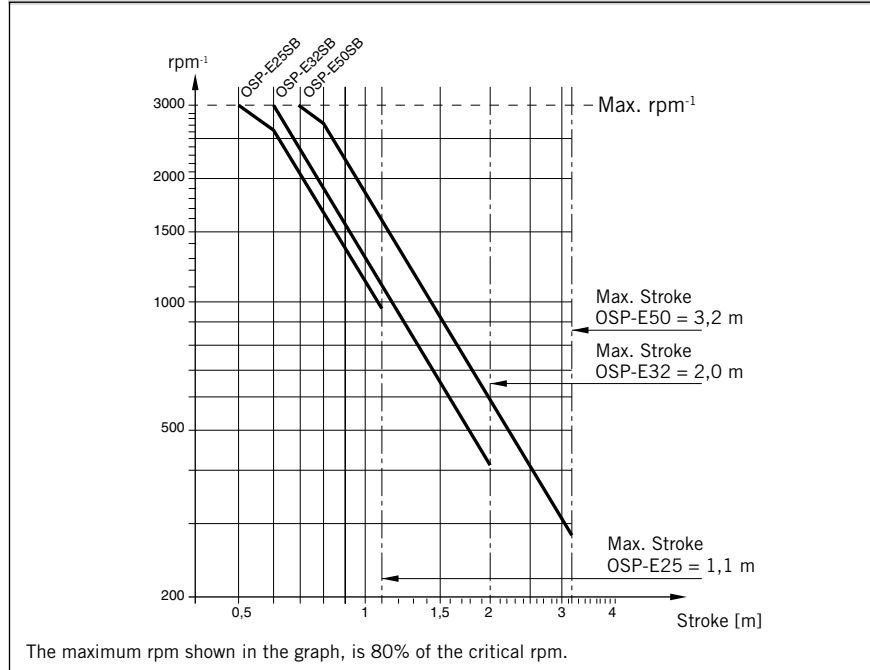

Performance / Action force

The performance to be expected depends on the maximum required actions force of the application. An increase of the action force will lead to a reduced performance.


Performance as a function of the action force

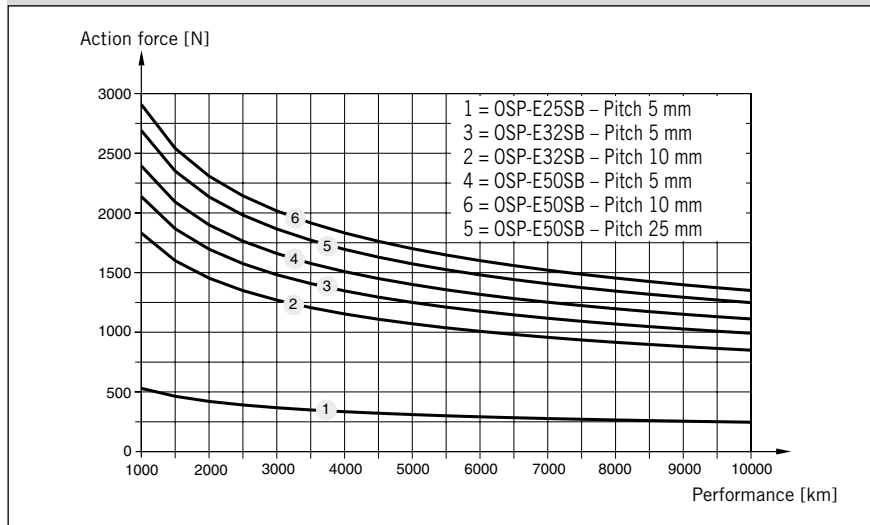

Distance / Time Graph

The adjacent graphs show travel distance and total time at maximum speed and recommended maximum acceleration. The graph assumes that acceleration and deceleration are equal.

Distance / Time Graph

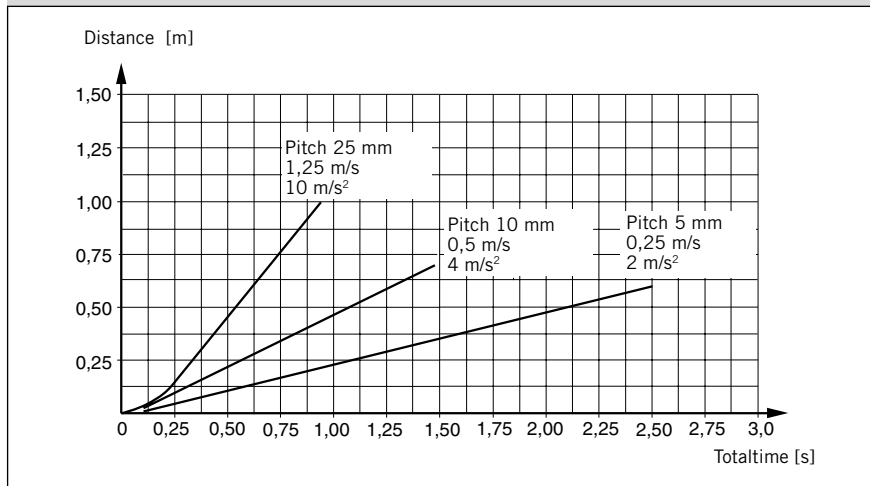

Required Torque / Mass


Using the known mass, the direction of the application and the recommended acceleration, the actuator can be sized and the required torque is shown in the adjacent graphs.

Mass in graphs = Load + moving mass of the actuator according to the weight chart (see table on page 61).


Please mind:

If an additional guide is used, mind the weight of the guide carriage.


Size OSP-E25SB, Pitch 5mm
Acceleration 2 m/s²

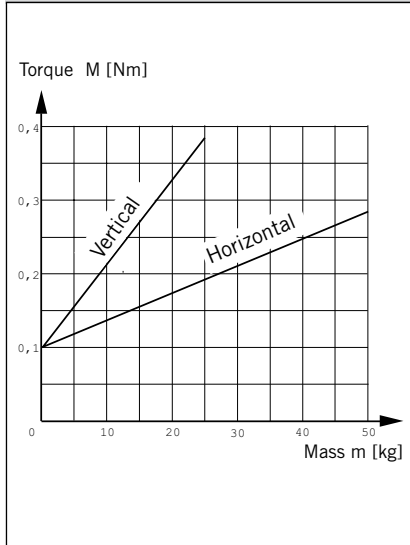


Size OSP-E32SB, Pitch 5 mm
Acceleration 2 m/s²

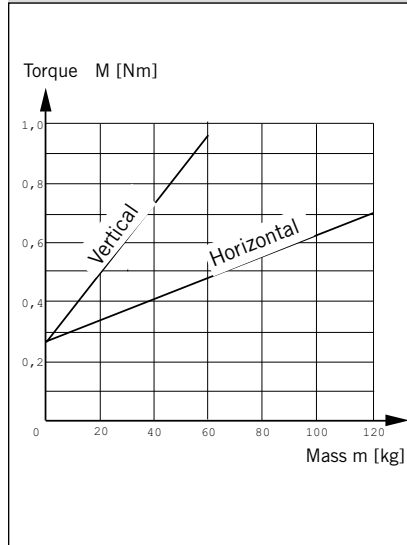


Size OSP-E32SB, Pitch 10 mm
Acceleration 4 m/s²

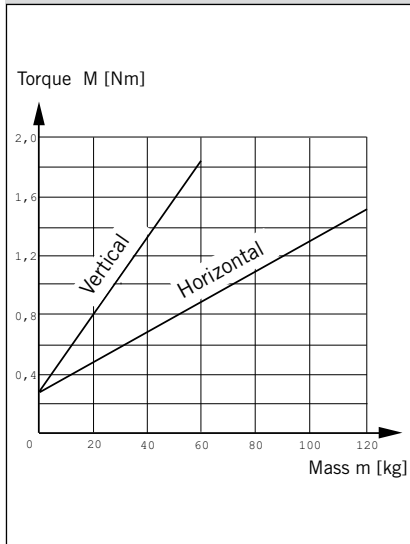


Size OSP-E50SB, Pitch 5 mm
Acceleration 2 m/s²

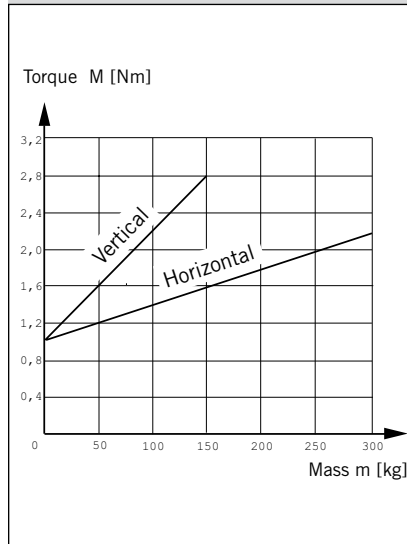




Size OSP-E50SB, Pitch 10 mm
Acceleration 4 m/s²

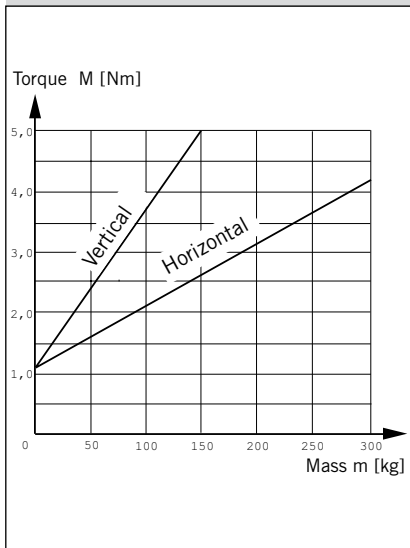


Size OSP-E50SB, Pitch 25 mm
Acceleration 10 m/s²

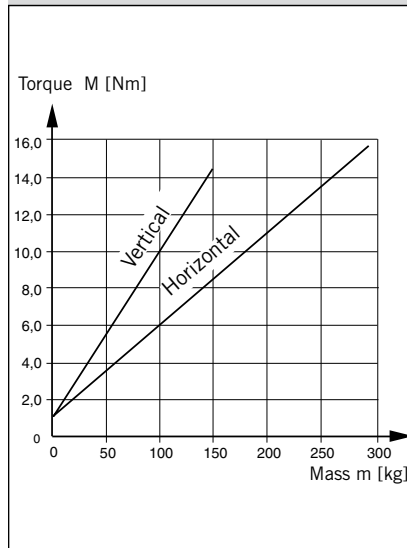

OSP-E..SB
Ball Screw Actuator with internal Plain Bearing Guide – Basic Unit

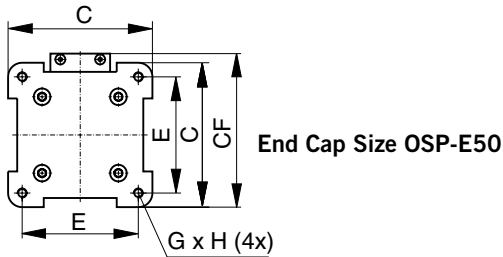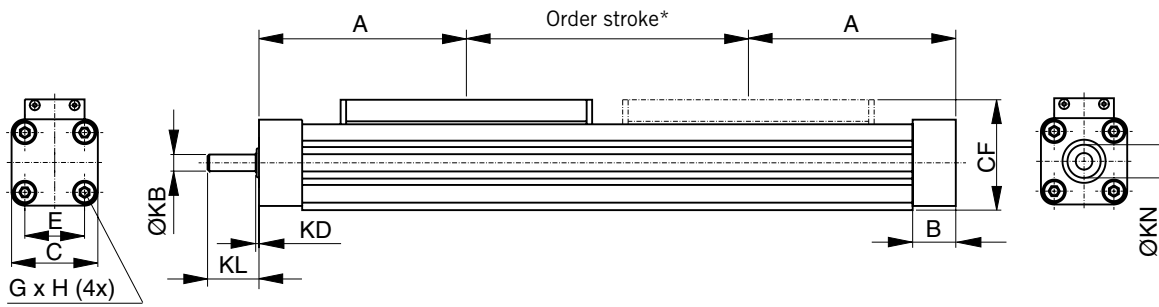

Plain shaft with keyway (Option)

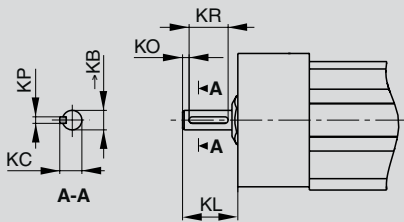

Dimension Table [mm]

Series	ØKB _{n7}	KC	KL Opt.3	Opt.4	KO	KP ^{P9}	KR
OSP-E25SB	6	6.8	17	24	2	2	12
OSP-E32SB	10	11.2	31	41	5	3	16
OSP-E50SB	15	17.0	43	58	6	5	28

Option 3: Keyway
Option 4: Keyway long version


*** Note:**

The mechanical end position must not be used as a mechanical end stop. Allow an additional safety clearance at both ends equivalent to the linear movement of one revolution of the drive shaft, but at least 25 mm.

Order stroke = required travel + 2 x safety distance.


The use of an AC motor with frequency converter normally requires a larger safety clearance than that required for servo systems. For further information, please contact your local Parker Origa representative.

Option – Tandem

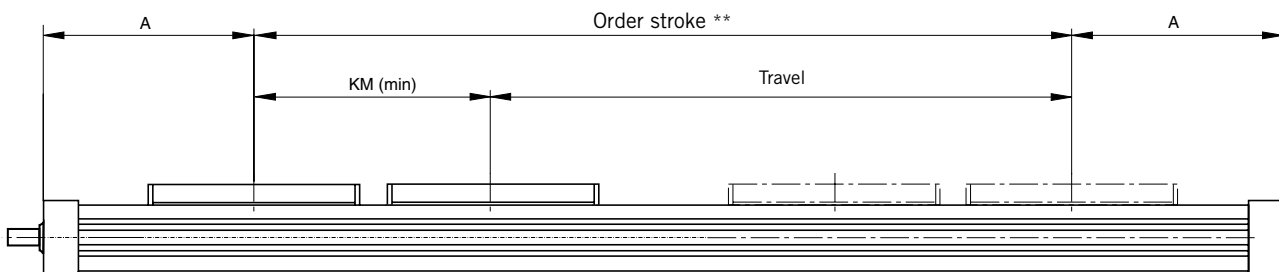

** Order stroke = required travel + KM min + 2 x safety distance

Standard Carrier

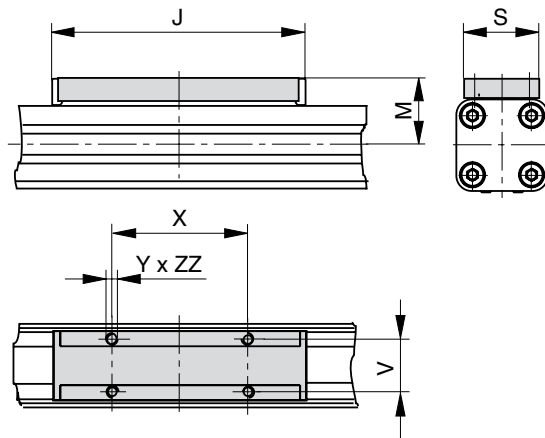

Dimension table [mm]

Series	A	B	C	E	G x H	J	K	M	S	V	X	Y	CF	FB	FH	KB	KD	KL	KM _{min}	KN	ZZ
OSP-E25SB	100	22.0	41	27	M5 x 10	117	21.5	31	33	25	65	M5	52.5	40	39.5	6 _{h7}	2	17	120	13	8
OSP-E32SB	125	25.5	52	36	M6 x 12	152	28.5	38	36	27	90	M6	66.5	52	51.7	10 _{h7}	2	31	165	20	10
OSP-E50SB	175	33.0	87	70	M6 x 12	200	43.0	49	36	27	110	M6	92.5	76	77.0	15 _{h7}	3	43	235	28	10

Order Instructions	OSPE25	—	1	0	3	0	0	—	00000	—	0	0	0	0	0	0
---------------------------	--------	---	---	---	---	---	---	---	-------	---	---	---	---	---	---	---

Size of actuator	
25	Size 25
32	Size 32
50	Size 50

Type of actuator	
1	Ball screw actuator with internal plain bearing guide

Carriage	
0	Standard
1 *	Tandem
3 *	Clean room
4 *	Position measurement system SFI-plus (see page 171 ff)

Pitch	
3	5 mm (size 25, 32 and 50)
4	10 mm (size 32 and 50)
5	25 mm (size 50)

* Option

Gear mounting *				
Size		25	32	50
0	without	x	x	x
1	LP050 i = 5	x	x	
2	LP050 i = 10	x	x	
3	LP070 i = 3		x	x
4	LP070 i = 5		x	x
5	LP070 i = 10		x	x

Info: For gears the mounting kit of the motor must be specified.
 LP050: A0, A1, A2
 LP070: A1, A2, A3

Order stroke
5 digits input in mm

Drive Shaft	
0 —	Plain Shaft
3 —*	Keyway
4 —*	Long with keyway

Mounting Kit for Motor and Gear *				
Size		25	32	50
A0	SY563T	x ¹	x ¹	
A1	SY873T	x ¹	x ¹	x ¹
A2	SMx60 xx xxx 8 11 ...	x ¹	x ¹	
A3	SMx82 xx xx 8 14 ...		x ¹	x ¹
A7	PS60		x ¹	x ¹
C0	LP050 / PV40-TA	x ¹	x ¹	
C1	LP070 / PV60-TA		x ¹	x ¹

x¹: If a mounting kit is selected the **drive shaft** is a plain shaft

Info: Motor and Gear mounting dimensions see page 193

Guide position	
0	Standard

External guide / carriage mounting	
0	Without
2	SL Slideline
6	PL Proline
D	HD Heavy duty
E	PS Powerslide 25/25
F	PS Powerslide 25/35, 32/35
G	PS Powerslide 25/44, 32/44
H	PS Powerslide 50/60
I	PS Powerslide 50/76
M	Inversion
R	Compensation
S	Compensation low back lash
see page 155 ff	

Niro	
0	Standard
1*	Niro screw

Accessories - please order separately	
Description	Page
Motor mounting	137 ff
Multi-axis system for actuators	177 ff

Magnetic switches *	
0	Without
1	1 pc. RST-K 2NO / 5m cable
2	1 pc. RST-K 2NC / 5m cable
3	2 pc. RST-K 2NC / 5m cable
4	2 pc. RST-K 2NC, 1 pc. RST-K 2NO / 5m cable
5	1 pc. RST-S 2NO / M8 plug
6	1 pc. RST-S 2NC / M8 plug
7	2 pc. RST-S 2NC / M8 plug
8	2 pc. RST-S 2NC, 1 pc. RST-S 2NO / M8 plug
A	1 pc. EST-S NPN / M8 plug
B	2 pc. EST-S NPN / M8 plug
C	3 pc. EST-S NPN / M8 plug
D	1 pc. EST-S PNP / M8 plug
E	2 pc. EST-S PNP / M8 plug
F	3 pc. EST-S PNP / M8 plug
see page 165 ff	

Profile mounting *	
0	Without
1	1 pair type E1
2	1 pair type D1
3	1 pair type MAE
4	2 pair type E1
5	2 pair type D1
6	2 pair type MAE
7	3 pair type E1
8	3 pair type D1
9	3 pair type MAE
K	1 pair type E2
L	1 pair type E3
M	1 pair type E4
N	2 pair type E2
P	2 pair type E3
Q	2 pair type E4
R	3 pair type E2
S	3 pair type E3
T	3 pair type E4
see pages 147 ff and 161 ff	

End cap mounting *	
0	Without
1	1 pc. type A1 (size 25 and 32) or C1 (size 50)
2	1 pc. type A2 (size 25 and 32) or C2 (size 50)
3	1 pc. type A3 (size 25 and 32) or C3 (size 50)
4	1 pc. type B1 (size 25 and 32) or C4 (size 50)
5	1 pc. type B4 (size 25 and 32)
see page 141 ff and 161 ff	

OSP-E..ST Trapezoidal Screw Actuator with Internal Plain Bearing Guide



Contents

Description	Page
Overview	68
Technical Data	71
Dimensions	73
Order Instructions	76

TRAPEZOIDAL SCREW ACTUATOR WITH INTERNAL PLAIN BEARING GUIDE FOR INTERMITTENT APPLICATIONS


A completely new generation of actuators which can be integrated into any machine layout neatly and simply.

Advantages


- Accurate path and position control
- High force output
- Self-locking
- Excellent slow speed characteristics
- Easy installation
- Low maintenance
- Ideal for level regulation, lifting and other applications with intermittent operations

Features


- Integrated drive and guidance system
- Complete motor and control packages
- Diverse range of accessories and mountings
- Special options available

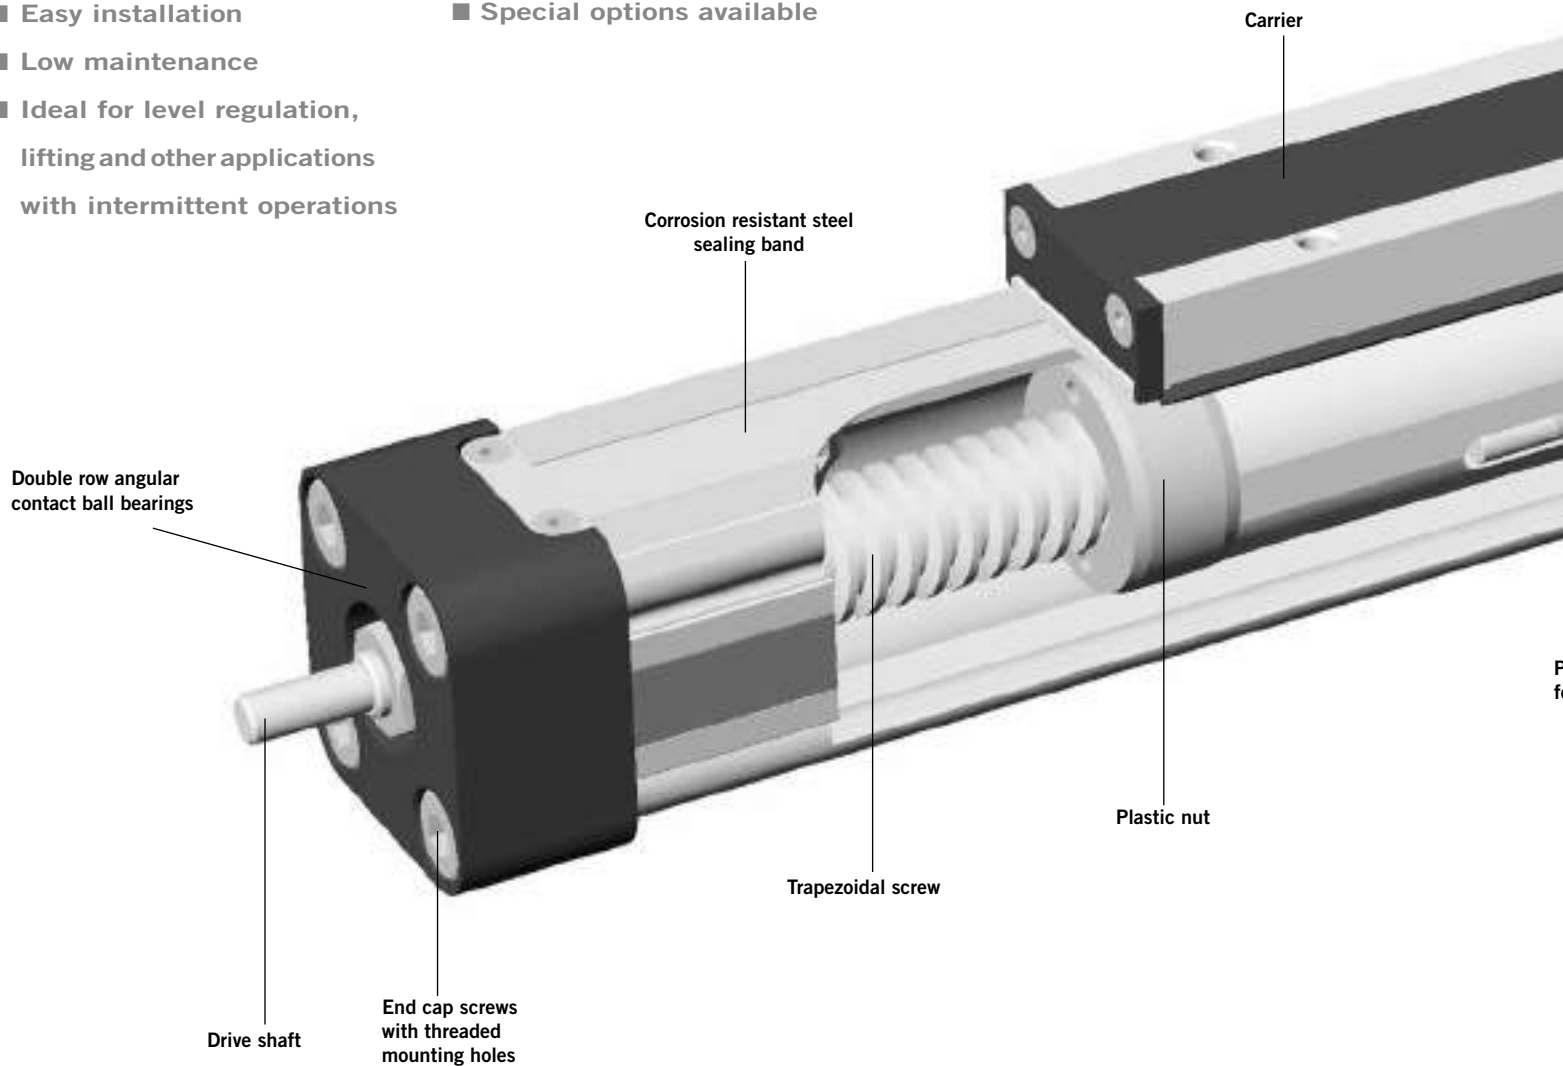

Take the easy route and load all the dimensions into your system. The file is suitable for all current CAD systems – available on CD-Rom or at www.parker-origa.com

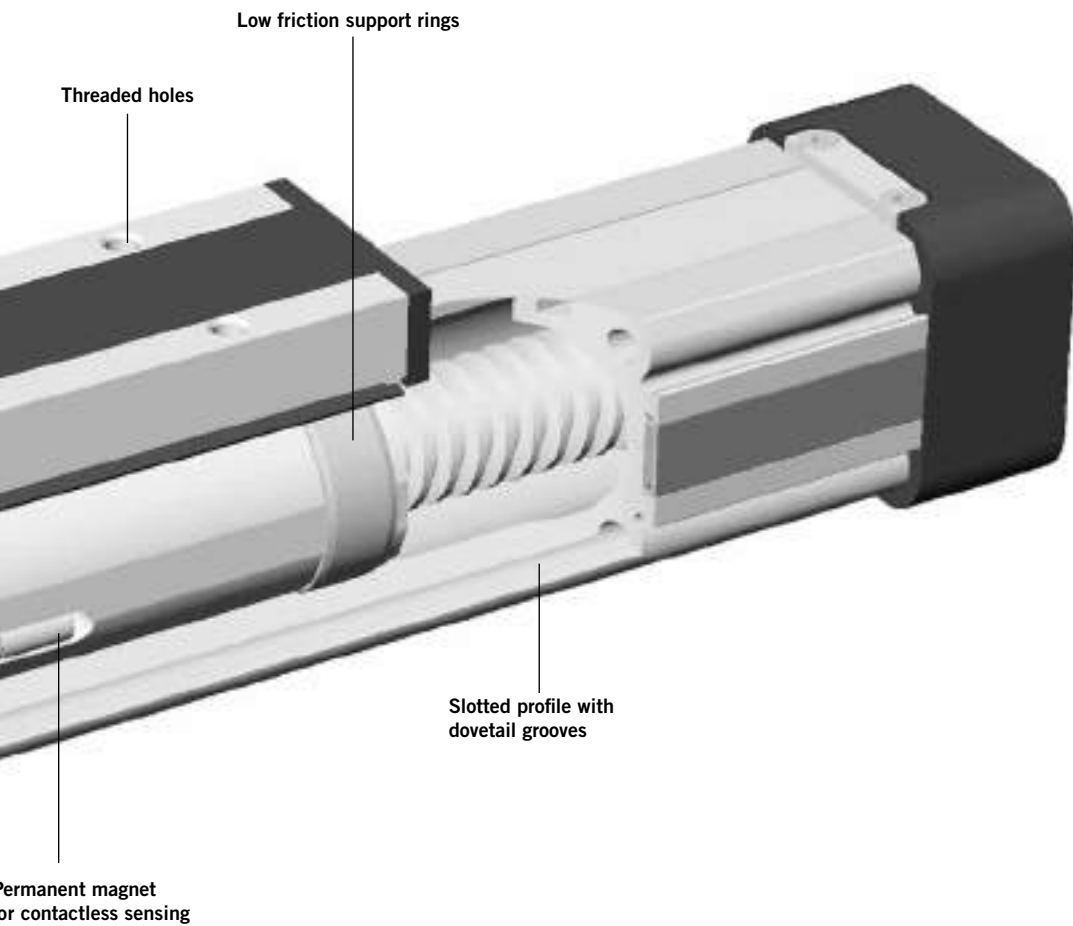

The dovetailed mounting rails of the new actuator expand its function into that of a universal system carrier. Modular system components are simply clamped on.



SLIDELINE
Combination with sliding guide for heavy-duty operation



POWERSLIDE
Roller bearing precision guidance for smooth travel and high dynamic or static loads.




PROLINE
The compact aluminium roller guide for high loads and velocities.



Heavy Duty guide HD
linear guides for heavy duty applications



SFI-plus
displacement measuring system




OPTIONS AND ACCESSORIES

OSP-E..ST TRAPEZOIDAL SCREW ACTUATOR WITH INTERNAL PLAIN BEARING GUIDE

STANDARD VERSIONS OSP-E..ST

Standard carrier with internal guidance and integrated magnet set for contactless position sensing. Dovetail profile for mounting of accessories and the actuator itself.

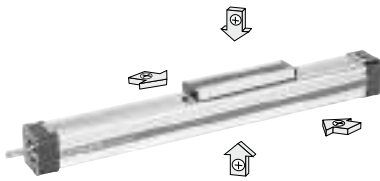

ACCESSORIES

MOTOR MOUNTINGS




END CAP MOUNTING

For end-mounting of the actuator




PROFILE MOUNTING

For supporting long actuators or mounting the actuator on the dovetail grooves.

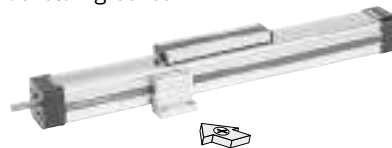

CLEVIS MOUNTING

Carrier with tolerance and parallelism compensation to drive external linear guides.

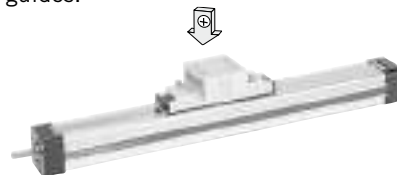

INVERSION MOUNTING

The inversion mounting, mounted on the carrier, transfers the driving force to the opposite side, e.g. for dirty environments.



MAGNETIC SWITCHES SERIES RST UND EST

For contactless position sensing of end stop and intermediate carrier positions.



MEASURING SYSTEM - SFI-PLUS
Incremental measuring system with practically relevant resolution.



Characteristics			
Characteristics	Symbol	Unit	Description
General Features			
Series			OSP-E..ST
Name			Trapezoidal Screw Actuator with internal Plain Bearing Guide
Mounting			See drawings
Temperature Range	ϑ_{\min} ϑ_{\max}	°C °C	-20 +70
Weight (mass)		kg	See table
Installation			In any position
Material	Slotted profile		Extruded anodized aluminium
	Trapezoidal screw		Cold rolled steel
	Drive nut		Thermoplastic polyester
	Guide bearings		Low friction plastic
	Sealing band		Hardened, corrosion resistant steel
	Screws, nuts		zinc plated steel
	Mountings		zinc plated steel and aluminium
Encapsulation class		IP	54

Weight (mass) and Inertia					
Series	Weight (mass)[kg]		Moving mass	Inertia [x 10 ⁻⁶ kgm ²]	
	At stroke 0 m	Add per metre stroke		At stroke 0 m	Add per metre
OSP-E25ST	0.9	2.8	0.2	6	30
OSP-E32ST	2.1	5.0	0.5	21.7	81
OSP-E50ST	5.1	10.6	1.3	152	400

Installation Instructions

Use the threaded holes in the free end cap and a profile mounting close to the motor end for mounting the actuator.

See if profile mountings are needed using the maximum permissible unsupported length graph on page 73. At least one end cap must be secured to prevent axial sliding when Profile Mounting is used.

When the actuator is moving an externally guided load, the compensation must be used.

The actuators can be fitted with the standard carrier mounting facing in any direction.

To prevent contamination such as fluid ingress, the drive should be fitted with its sealing band facing downwards.

The inversion mounting can be fitted to transfer the driving force to the opposite side.

Maintenance

All moving parts are long-term lubricated for a normal operational environment. Parker Origa recommends a check and lubrication of the actuator, and if necessary a change of wear parts, after an operation time of 12 months or 300 km travel of distance.

Please refer to the operating instructions supplied with the drive.

First service start-up

The maximum values specified in the technical data sheet for the different products must not be exceeded. Before taking the actuator machine into service, the user must ensure the adherence to the EC Machine Directive 2006/42/EG.

OSP-E..ST Trapezoidal Screw Actuator with internal Plain Bearing Guide

Size 25, 32, 50



Standard Versions:

- Standard carrier with internal plain bearing guide
- Dovetail profile for mounting of accessories and the actuator itself
- Pitch of Trapezoidal Spindle:
Type OSP-E25ST : 4 mm
Type OSP-E32ST: 4 mm
Type OSP-E50ST: 6 mm

Options:

- Displacement Measuring System SFI-plus
- Keyway



Sizing Performance Overview

Maximum Loadings

Sizing of Actuator

The following steps are recommended for selection :


1. Check that maximum values in the table T3 are not exceeded.
2. Check the maximum values in graph on page 74 ff are not exceeded.
3. When sizing and specifying the motor, the RMS-average torque must be calculated using the cycle time of the application.
4. Check that the maximum allowable unsupported length is not exceeded (see on page 73 ff).

Performance Overview				
Characteristics	Unit	Description		
		OSP-E25ST	OSP-E32ST	OSP-E50ST
Size		OSP-E25ST	OSP-E32ST	OSP-E50ST
Pitch	[mm]	4	4	6
Max. speed	[m/s]	0.1	0.1	0.15
Linear motion per revolution drive shaft	[mm]	4	4	6
Max. rpm, drive shaft	[min-1]	1500	1500	1500
Max. effective action force FA	[N]	600	1300	2 500
Corresponding torque on drive shaft	[Nm]	1.35	3.2	8.8
No-load torque	[Nm]	0.3	0.4	0.5
Max. allowable torque on drive shaft	[Nm]	1.55	4.0	9.4
Self-locking force FL1)	[N]	600	1300	2500
Repeatability	[mm/m]	±0.5	±0.5	±0.5
Max. Standard stroke length	[mm]	1100	2000	2500*

¹⁾ Related to screw types Tr 16x4, Tr 20x4, TR 30x6 see page 71 ff – for inertia.

* For strokes longer than 2000 mm in horizontal applications, please contact our customer support.

Forces, loads and moments

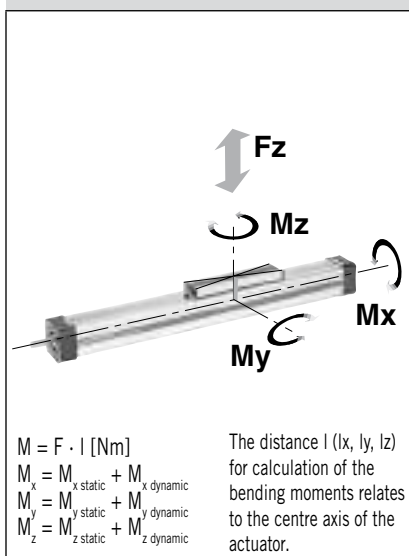

Combined Loads

If the actuator is subjected to several forces, loads and moments at the same time, the maximum load is calculated with the equation shown here. The maximum permissible loads must not be exceeded.

Maximum Permissible Loads

T3


Size	Max. applied load [N] Fz	Max. moments [Nm]		
		Mx	My	Mz
OSP-E25ST	500	2	24	7
OSP-E32ST	1000	6	65	12
OSP-E50ST	1500	13	155	26

Equation for Combined Loads


$$\frac{Fz}{Fz \text{ (max)}} + \frac{Mx}{Mx \text{ (max)}} + \frac{My}{My \text{ (max)}} + \frac{Mz}{Mz \text{ (max)}} \leq 1$$

The total of the loads must not exceed >1 under any circumstances.

Maximum Permissible Unsupported Length – Placing of Profile Mounting

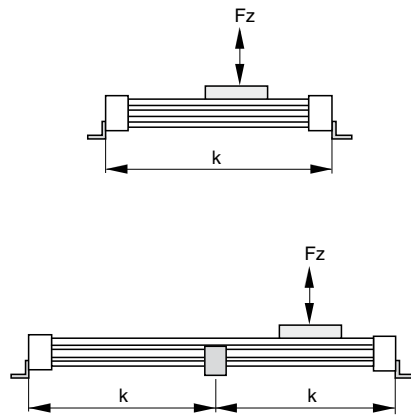

k = Maximum permissible distance between mountings/mid-section support for a given load F.

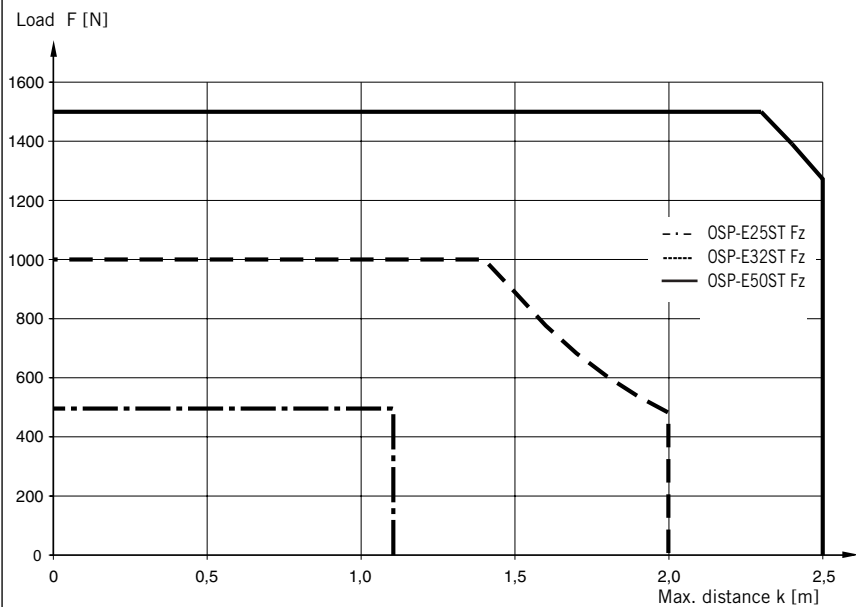

(Up to the curve in the above graph the deflection will be max. 0.2 % of distance k.)

Maximum Permissible Unsupported Length

Stroke Length

The stroke lengths of the actuators are available in multiples of 1 mm up to the following maximum stroke lengths.
OSP-E25ST: max. 1100 mm
OSP-E32ST: max. 2000 mm
OSP-E50ST: max. 2500 mm *
 Other stroke lengths are available on request.

* For strokes longer than 2000 mm in horizontal applications, please contact our customer support

The end of stroke must not be used as a mechanical stop.

Allow an additional safety clearance of minimum 25 mm at both ends.

The use of an AC motor with frequency converter normally requires a larger safety clearance than that required for servo systems.


For advise, please contact your local Parker Origa technical support department.

Mounting on the Drive Shaft

Do not expose the drive shaft to uncontrolled axial or radial forces when mounting coupling or pulley, a steadying block should be used.

Pulleys

Minimum allowable number of teeth (AT5) and diameter of pulley at maximum applied torque.

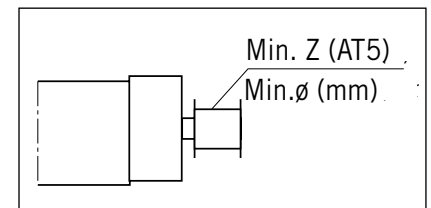


Size	Min. Z	Min. ø
OSP-E25ST	24	38
OSP-E32ST	24	38
OSP-E50ST	36	57

Maximum rpm / Stroke

At longer strokes the speed has to be reduced according to the adjacent graphs.

Maximum rpm / Stroke

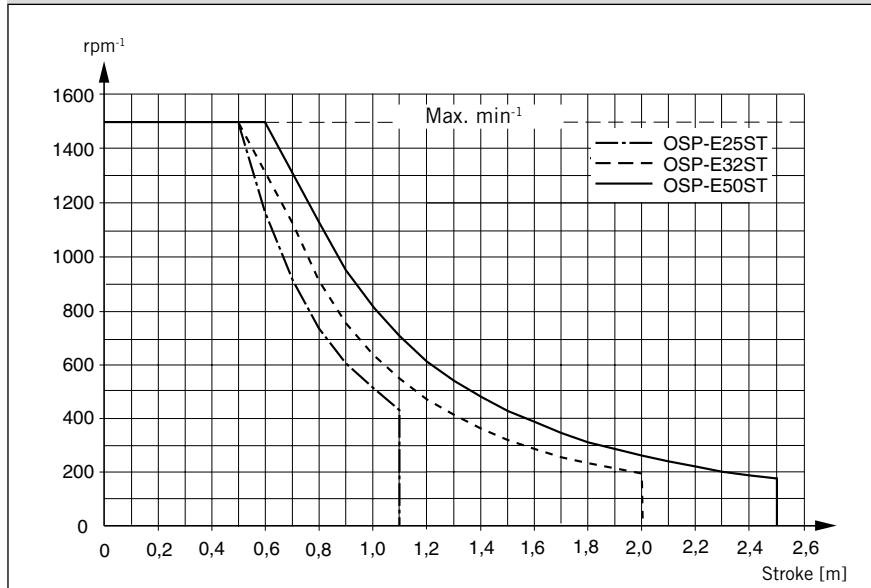


The maximum rpm shown in the graph, is 80% of the critical rpm.

Performance / Action Force

The actuators are designed for a 10% intermittent usage.


The performance to be expected depends on the maximum required actions force of the application. An increase of the action force will lead to a reduced performance.

Performance as a function of the action force

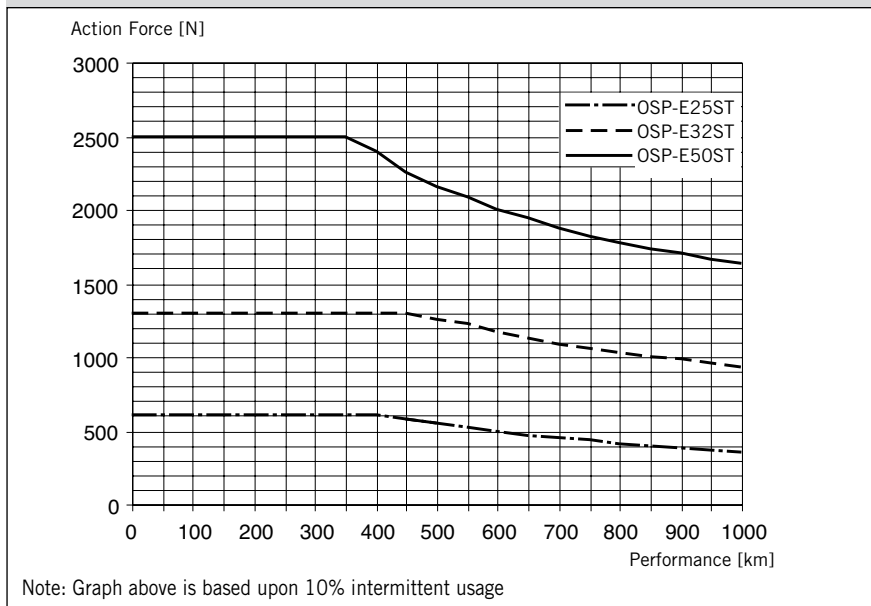


Note: Graph above is based upon 10% intermittent usage

OSP-E..ST
Trapezoidal Screw Actuator with internal Plain Bearing Guide – Basic Unit

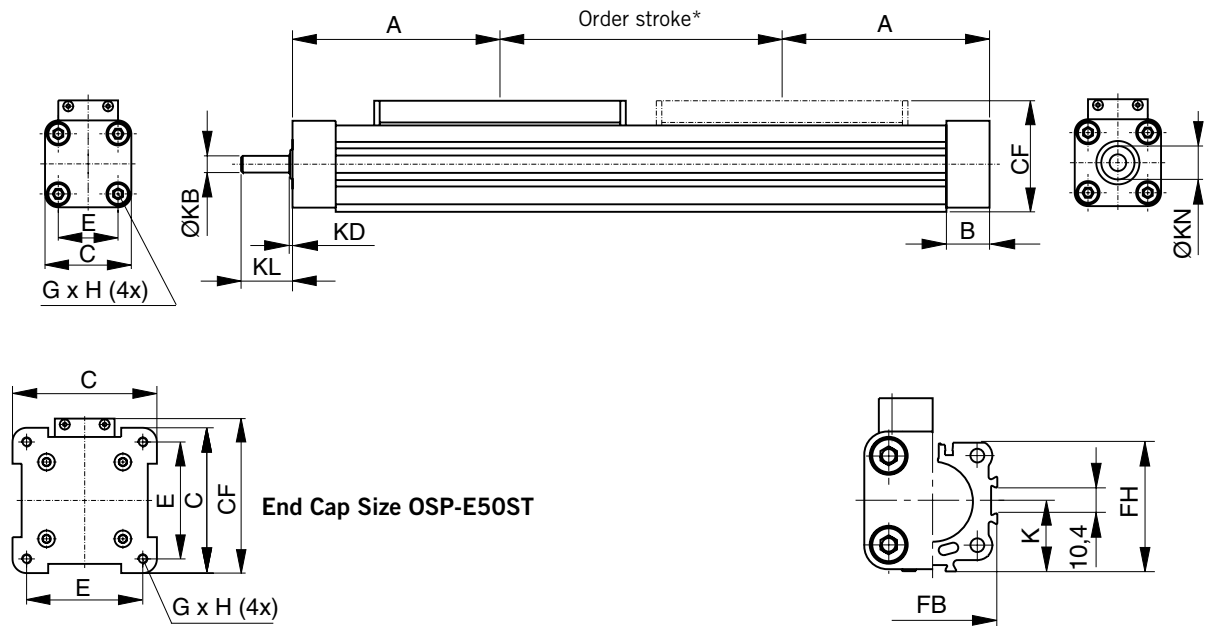

Plain Shaft with Keyway (Option)

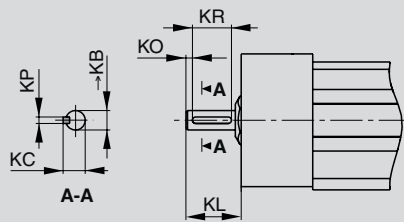

Dimension Table [mm]

Series	ØKB _{h7}	KC	KL Opt.3	Opt.4	KO	KP ^{P9}	KR
OSP-E25ST	6	6.8	17	24	2	2	12
OSP-E32ST	10	11.2	31	41	5	3	16
OSP-E50ST	15	17.0	43	58	6	5	28

Option 3: Keyway
Option 4: Keyway long version

*** NOTE:**


The mechanical end position must not be used as a mechanical end stop. Allow an additional safety clearance at both ends equivalent to the linear movement of one revolution of the drive shaft, but at least 25 mm.

Order stroke = required travel + 2 x safety distance.

The use of an AC motor with frequency converter normally requires a larger safety clearance than that required for servo systems.

For further information, please contact your local Parker Origa representative.

Standard Carrier

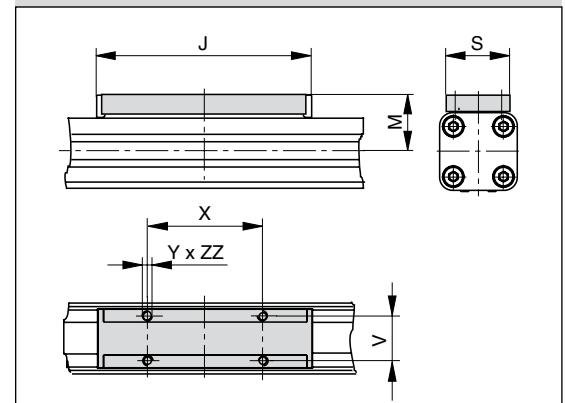

Dimension Table [mm]

Series	A	B	C	E	G x H	J	K	M	S	V	X	Y	CF	FB	FH	KB	KD	KL	KN	ZZ
OSP-E25ST	100	22.0	41	27	M5 x 10	117	21.5	31	33	25	65	M5	52.5	40	39.5	6 _{h7}	2	17	13	8
OSP-E32ST	125	25.5	52	36	M6 x 12	152	28.5	38	36	27	90	M6	66.5	52	51.7	10 _{h7}	2	31	20	10
OSP-E50ST	175	33.0	87	70	M6 x 12	200	43.0	49	36	27	110	M6	92.5	76	77	15 _{h7}	3	43	28	10

Order Instructions OSPE25 — 2 0 4 0 0 — 00000 — 0 0 0 0 0 0

Size of drive	
25	Size 25
32	Size 32
50	Size 50

Type of drive	
2	Trapezoidal screw actuator with internal plain bearing guide

Carriage	
0	Standard
4	Position measurement system SFI-plus * (see page 159 ff)

Pitch	
4	4 mm (for size 25 and 32)
6	6 mm (for size 50)

* Option

Gear mounting *				
Size		25	32	50
0	without	x	x	x
1	LP050 i = 5	x	x	
2	LP050 i = 10	x	x	
3	LP070 i = 3		x	x
4	LP070 i = 5		x	x
5	LP070 i = 10		x	x

Info: For gears the mounting kit of the motor must be specified.
 LP050: A0, A1, A2
 LP070: A1, A2, A3

Order stroke
5 digits input in mm

Drive Shaft	
0 —	Plain Shaft
3 —*	Keyway
4 —*	Long with keyway

Mounting Kit for Motor and Gear *				
Size		25	32	50
A0	SY563T	x ¹	x ¹	
A1	SY873T	x ¹	x ¹	x ¹
A2	SMx60 xx xxx 8 11 ...	x ¹	x ¹	
A3	SMx82 xx xx 8 14 ...		x ¹	x ¹
A7	PS60		x ¹	x ¹
C0	LP050 / PV40-TA	x ¹	x ¹	
C1	LP070 / PV60-TA		x ¹	x ¹

x¹: If a mounting kit is selected the **drive shaft** is a plain shaft

Info: Motor and Gear mounting dimensions see page 193

Guide position	
0	Standard

External guide / carriage mounting	
0	Without
2	SL Slide line
6	PL Proline
D	HD Heavy duty
E	PS Power slide 25/25
F	PS Power slide 25/35, 32/35
G	PS Power slide 25/44, 32/44
H	PS Power slide 50/60
I	PS Power slide 50/76
M	Inversion
R	Compensation
S	Compensation low back lash
see pages 101 ff	

Niro	
0	Standard
1 *	Niro screws

* Option

Accessories - please order separately

Description	Page
Motor mounting	137 ff
Multi-axis system for actuators	177 ff

Magnetic switches *

0	Without
1	1 pc. RST-K 2NO / 5m cable
2	1 pc. RST-K 2NC / 5m cable
3	2 pc. RST-K 2NC / 5m cable
4	2 pc. RST-K 2NC, 1 pc. RST-K 2NO / 5m cable
5	1 pc. RST-S 2NO / M8 plug
6	1 pc. RST-S 2NC / M8 plug
7	2 pc. RST-S 2NC / M8 plug
8	2 pc. RST-S 2NC, 1 pc. RST-S 2NO / M8 plug
A	1 pc. EST-S NPN / M8 plug
B	2 pc. EST-S NPN / M8 plug
C	3 pc. EST-S NPN / M8 plug
D	1 pc. EST-S PNP / M8 plug
E	2 pc. EST-S PNP / M8 plug
F	3 pc. EST-S PNP / M8 plug
see page 165 ff	

Profile mounting *

0	Without
1	1 pair type E1
2	1 pair type D1
3	1 pair type MAE
4	2 pair type E1
5	2 pair type D1
6	2 pair type MAE
7	3 pair type E1
8	3 pair type D1
9	3 pair type MAE
K	1 pair type E2
L	1 pair type E3
M	1 pair type E4
N	2 pair type E2
P	2 pair type E3
Q	2 pair type E4
R	3 pair type E2
S	3 pair type E3
T	3 pair type E4
see page 147 and 161 ff	

End cap mounting *

0	Without
1	1 pc. type A1 (size 25 and 32) or C1 (size 50)
2	1 pc. type A2 (size 25 and 32) or C2 (size 50)
3	1 pc. type A3 (size 25 and 32) or C3 (size 50)
4	1 pc. type B1 (size 25 and 32) or C4 (size 50)
5	1 pc. type B4 (size 25 and 32)
see page 129 and 143 ff	

OSP-E..SBR Ball Screw Actuator with Internal Plain Bearing Guide and Piston Rod



Contents

Description	Page
Overview	80
Technical Data	83
Dimensions	85
Order Instructions	86

BALL SCREW ACTUATOR WITH INTERNAL PLAIN BEARING GUIDE AND PISTON ROD FOR ACCURATE PISTON ROD APPLICATIONS


A completely new generation of actuators which can be integrated into any machine layout neatly and simply.


Advantages

- High output force
- Excellent running characteristics
- Accurate path and position control
- High levels of repeatability

Features

- Extending drive rod
- Ball screw spindle
- Non-rotating drive rod
- Continuous duty operation
- Large range of accessories

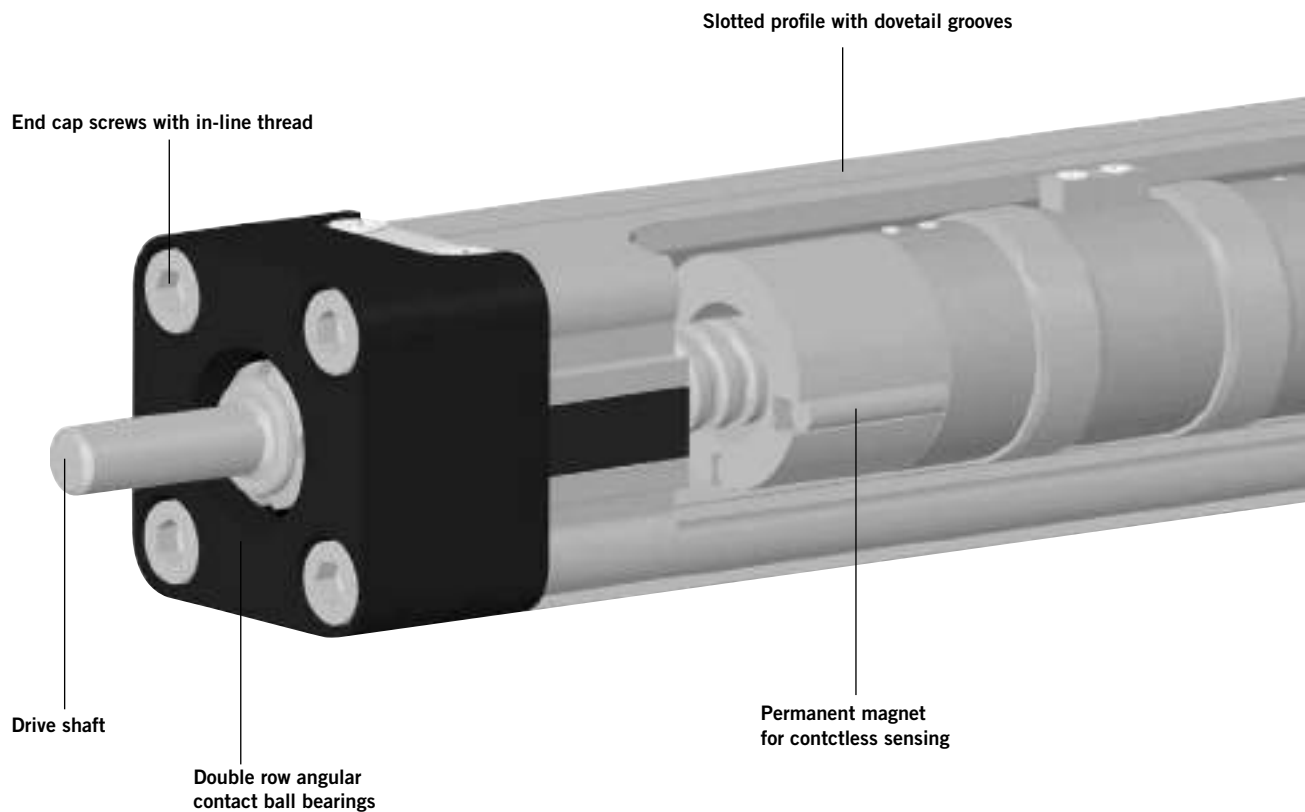

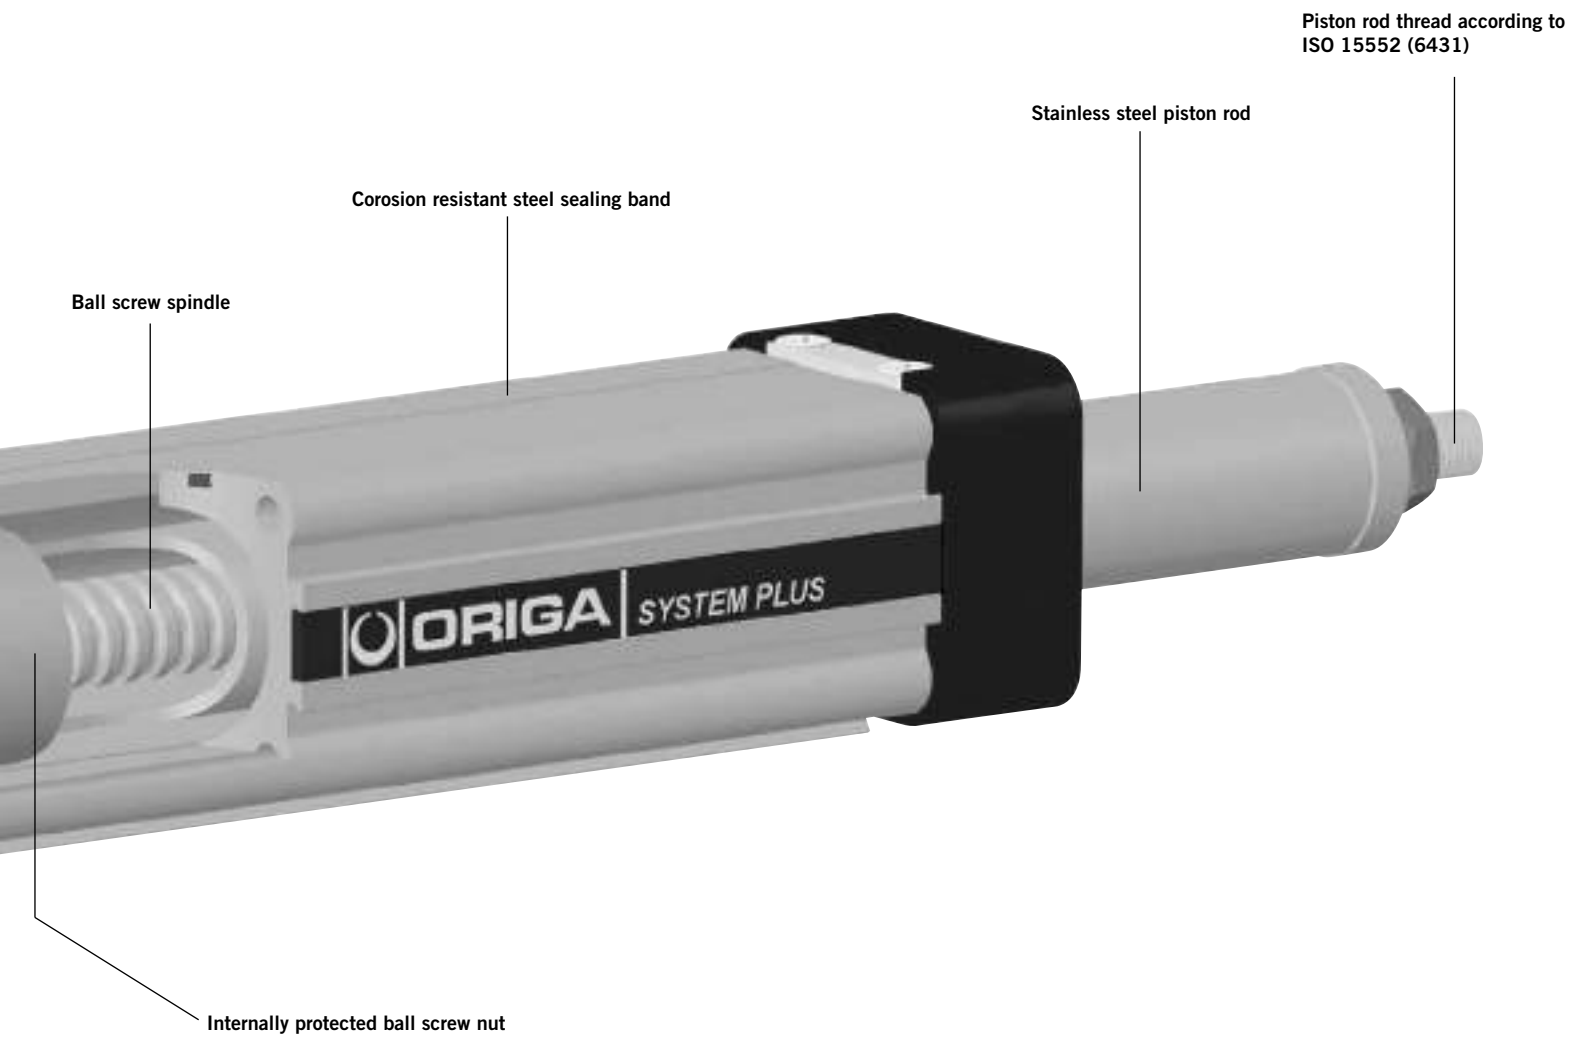

Take the easy route and load all the dimensions into your system. The file is suitable for all current CAD systems – available on CD-Rom or at www.parker-origa.com




OPTIONS AND ACCESSORIES

OSP-E..SBR BALL SCREW ACTUATOR WITH INTERNAL PLAIN BEARING GUIDE AND PISTON ROD

STANDARD VERSIONS OSP-E..SBR

Standard piston rod with internal guidance and integrated magnet set for contactless position sensing. Dovetail profile for mounting of accessories and the actuator itself.



BALL SCREW PITCH

The ball screws spindles are available in various pitches:

- OSP-E25SBR: 5 mm
- OSP-E32SBR: 5, 10 mm
- OSP-E50SBR: 5, 10, 25 mm

ACCESSORIES

MOTOR MOUNTINGS



END CAP MOUNTING

For end-mounting the actuator on the extending rod side.




Flange Mounting C

For end-mounting the actuator on the extending rod side.



PROFILE MOUNTING

For mounting the actuator on the dovetail grooves and on the motor end.

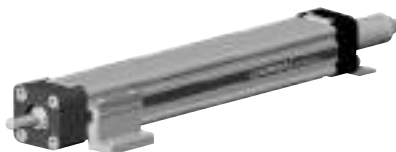

Turning mounting EN in combination with pivot mounting EL.
– steplessly adjustable in axial direction.



COMPENSATION

Piston Rod eye



Piston rod Clevis



Piston Rod compensating coupling

For compensating of radial and angular misalignments



MAGNETIC SWITCHES SERIES RST AND EST

For contactless position sensing of end stop and intermediate carrier positions.



Characteristics			
Characteristics	Symbol	Unit	Description
General Features			
Series			OSP-E..SBR
Name			Ball Screw Actuator with internal Plain Bearing Guide and Piston Rod
Mounting			see drawings
Temperature range	ϑ_{\min} ϑ_{\max}	°C °C	-20 +80
Weight (Mass)		kg	see table
Installation			In any position
Material	Slotted profile		Al anodized
	Ball screw		Steel
	Ball nut		Steel
	Piston rod		Stainless steel
	Guide bearings		Low friction plastic
	Sealing band		Hardened, corrosion resistant steel
	Screws, nuts		Zinc plated steel
	Mountings		Zinc plated steel and aluminium
Encapsulation class		IP	54

Weight (Mass) and Inertia						
Series	Weight (Mass) [kg]		Moving Mass [kg]		Inertia [x 10 ⁻⁶ kgm ²]	
	At stroke 0 m	Add per metre stroke	At stroke 0 m	Add per metre stroke	At stroke 0 m	Add per metre stroke
OSP-E25SBR	0.7	3.0	0.2	0.9	1.2	11.3
OSP-E32SBR	1.7	5.6	0.6	1.8	5.9	32.0
OSP-E50SBR	4.5	10.8	1.1	2.6	50.0	225.0

Installation Instructions

Use the threaded holes in the free end cap and a profile mounting close to the motor end for mounting the actuator.

The piston rod is locked against rotations, but must not be used for radial loads M_x , that need to be guided externally. A compensation part e. g. piston rod eye (see order instructions page 86) is recommended.

Maintenance

All moving parts are long-term lubricated for a normal operational environment. Parker Origa recommends a check and lubrication of the actuator, and if necessary a change of wear parts, after an operation time of 12 months or 3000 km travel of distance. Please refer to the operating instructions supplied with the actuator.

First service start-up

The maximum values specified in the technical data sheet for the different products must not be exceeded. Before taking the actuator as a machine into service, the user must ensure the adherence to the EC Machine Directive 2006/42/EG.

OSP-E..SBR Ball Screw Actuator with internal Plain Bearing Guide and Piston Rod

Size 25, 32, 50



Standard Version:

- Standard piston rod with internal plain bearing guide
- Pitches of Ball Screw Spindle:
Type OSP-E25SBR : 5 mm
Type OSP-E32SBR: 5, 10 mm
Type OSP-E50SBR: 5, 10, 25 mm

Option:

- Key way version



Sizing Performance Overview Maximum Loadings

Sizing of Actuator



The following steps are recommended for selection :

1. Check that the maximum values in the adjacent chart and transverse force/stroke graph below are not exceeded.
2. Check the lifetime/travel distance in graph below.
3. When sizing and specifying the motor, the RMS-average torque must be calculated using the cycle time in application.

Performance overview							
Characteristics	Unit	Description					
Series		OSP-E25SBR		OSP-E32SBR		OSP-E50SBR	
Pitch	[mm]	5	5	10	5	10	25
Max. speed	[m/s]	0.25	0.25	0.5	0.25	0.5	1.25
Linear motion per revolution drive shaft	[mm]	5	5	10	5	10	25
Max. rpm drive shaft	[min ⁻¹]	3000		3000		3000	
Max. effective action force F_A	[N]	260		900		1200	
Corresponding torque drive shaft	[Nm]	0.45		1.1 1.8		1.3 2.8 6.0	
No-load torque	[Nm]	0.2		0.2 0.3		0.3 0.4 0.5	
Max. allowable torque on drive shaft	[Nm]	0.6		1.5 2.8		4.2 7.5 20	
Max. allowable acceleration	[m/s ²]	5		5		5	
Typical repeatability	[mm/m]	±0.05		±0.05		±0.05	
Max. Standard stroke length	[mm]	500		500		500	


Transverse Force / Stroke

The permissible transverse force is reduced with increasing stroke length, according to the adjacent graphs.

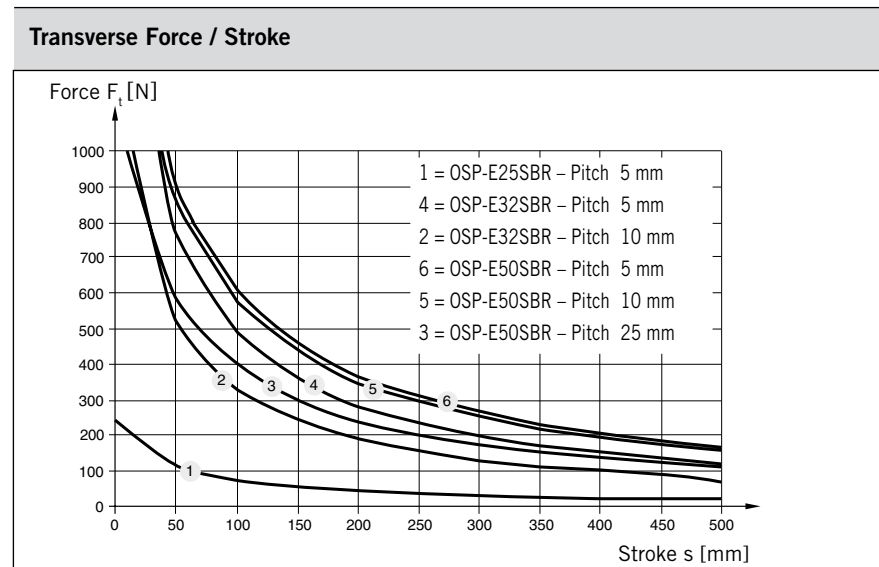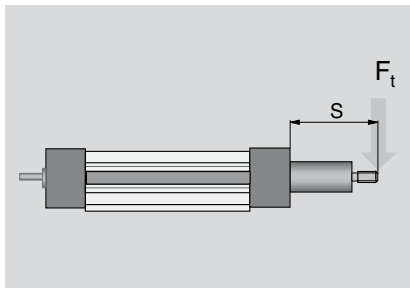


Maximum rpm / Stroke

At longer strokes the speed has to be reduced according to the adjacent graphs.

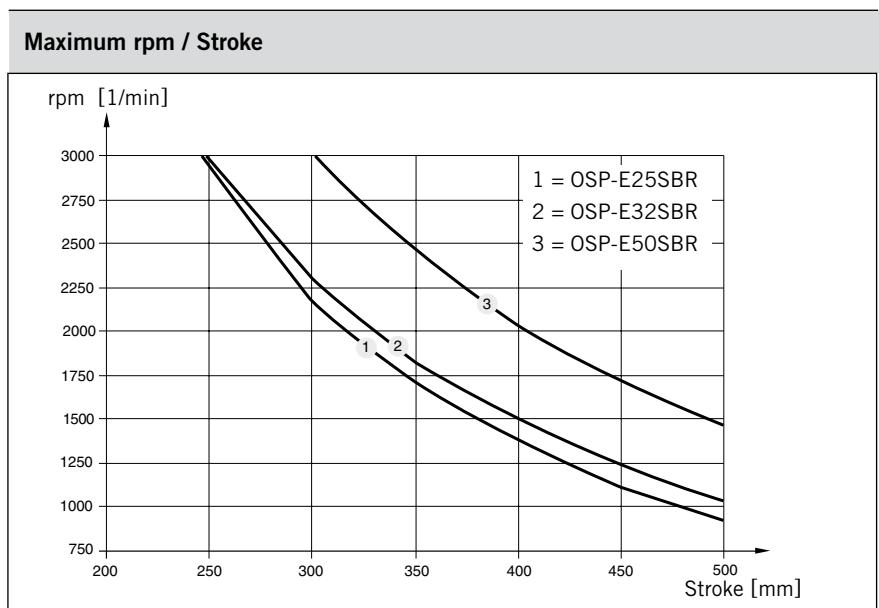


Performance as a function of the action force

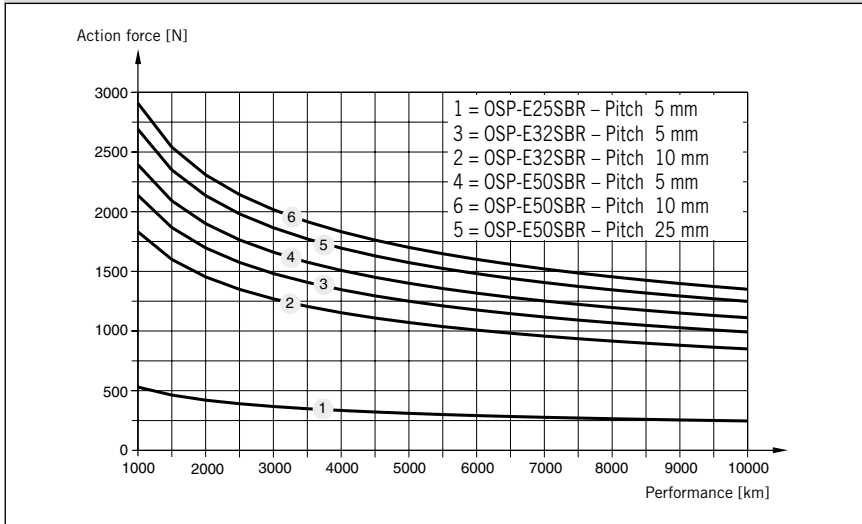


Performance / Action force

The performance to be expected depends on the maximum required actions force of the application. An increase of the action force will lead to a reduced performance.

OSP-E..SBR Ball Screw Actuator with internal Plain Bearing Guide and Piston Rod – Basic Unit

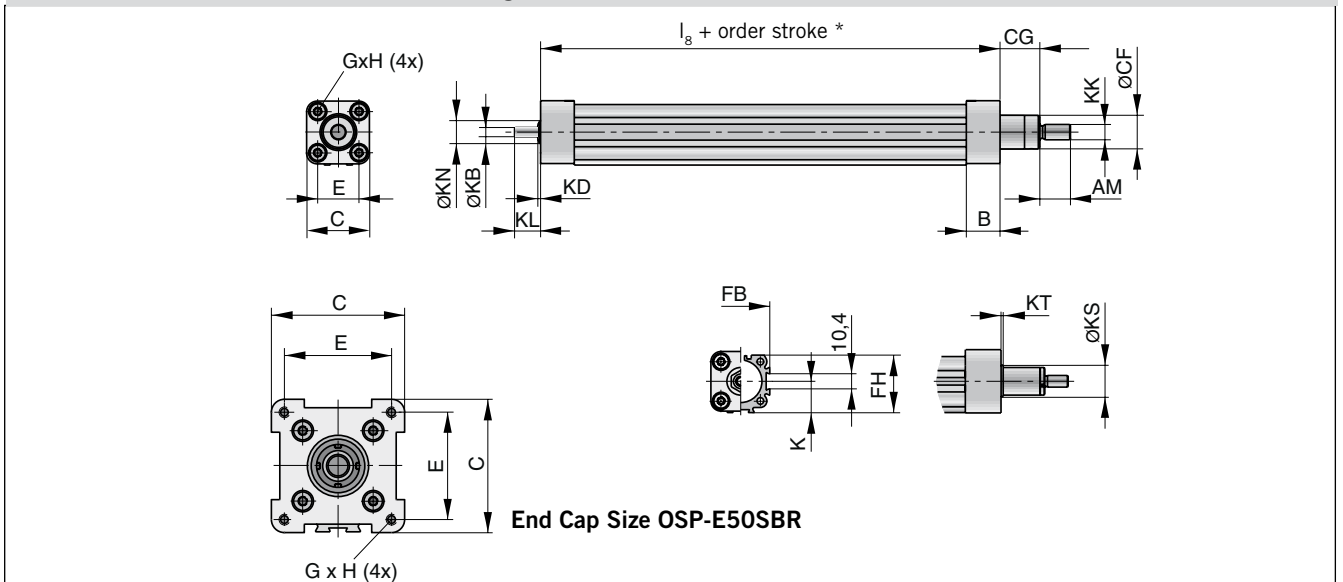

Plain shaft with keyway (Option)



Dimension Table [mm]

Series	ØKB _{h7}	KC	KL Opt.3	Opt.4	KO	KP ^{P9}	KR
OSP-E25SBR	6	6.8	17	24	2	2	12
OSP-E32SBR	10	11.2	31	41	5	3	16
OSP-E50SBR	15	17.0	43	58	6	5	28

Option 3: Keyway
Option 4: Keyway long version

* Note:

The mechanical end position must not be used as a mechanical end stop. Allow an additional safety clearance at both ends equivalent to the linear movement of one revolution of the drive shaft, but at least 25 mm.

Order stroke = required travel + 2 x safety distance.

The use of an AC motor with frequency converter normally requires a larger safety clearance than that required for servo systems. For further information, please contact your local Parker Origa representative.

Dimension Table [mm]

Series	B	C	E	G x H	K	I ₈	AM	ØCF	CG	FB	FH	ØKB	KD	KK	KL	ØKN	ØKS	KT
OSP-E25SBR	22.0	41	27	M5 x 10	21.5	110.0	20	22	26	40	39.5	6 _{h7}	2	M10x1.25	17	13	-	-
OSP-E32SBR	25.5	52	36	M6 x 12	28.5	175.5	20	28	26	52	51.7	10 _{h7}	2	M10x1.25	31	20	33	2
OSP-E50SBR	33.0	87	70	M6 x 12	43.0	206.0	32	38	37	76	77.0	15 _{h7}	3	M16x1.5	43	28	44	3

Order Instructions	OSPE25	—	4	0	5	0	0	—	00000	—	0	0	0	0	0	0
---------------------------	--------	---	---	---	---	---	---	---	-------	---	---	---	---	---	---	---

Size of drive	
25	Size 25
32	Size 32
50	Size 50

Type of drive	
4	Ball screw actuator with internal plain bearing guide and piston rod

Pitch	
5	5 mm (for size 25, 32 and 50)
7	10 mm (for size 32 and 50)
8	25 mm (for size 50)

* Option

Gear mounting *				
Size		25	32	50
0	without	x	x	x
1	LP050 i = 5	x	x	
2	LP050 i = 10	x	x	
3	LP070 i = 3		x	x
4	LP070 i = 5		x	x
5	LP070 i = 10		x	x

Info: For gears the mounting kit of the motor must be specified.
 LP050: A0, A1, A2
 LP070: A1, A2, A3

Order stroke
5 digits input in mm

Drive Shaft	
0 —	Plain Shaft
3 —*	Keyway
4 —*	Long with keyway

Mounting Kit for Motor and Gear *				
Size		25	32	50
A0	SY563T	x ¹	x ¹	
A1	SY873T	x ¹	x ¹	x ¹
A2	SMx60 xx xxx 8 11 ...	x ¹	x ¹	
A3	SMx82 xx xx 8 14 ...		x ¹	x ¹
A7	PS60		x ¹	x ¹
C0	LP050 / PV40-TA	x ¹	x ¹	
C1	LP070 / PV60-TA		x ¹	x ¹

x¹: If a mounting kit is selected the **drive shaft** is a plain shaft

Info: Motor and Gear mounting dimensions see page 193

Piston rod mounting *	
0	Without
T	Piston rod eye
U	Piston rod clevis
V	Piston rod compensating coupling
see page 155 ff	

Niro	
0	Standard
1*	Niro screws

* Option

Magnetic switches *	
0	Without
1	1 pc. RST-K 2NO / 5m cable
2	1 pc. RST-K 2NC / 5m cable
3	2 pc. RST-K 2NC / 5m cable
4	2 pc. RST-K 2NC, 1 pc. RST-K 2NO / 5m cable
5	1 pc. RST-S 2NO / M8 plug
6	1 pc. RST-S 2NC / M8 plug
7	2 pc. RST-S 2NC / M8 plug
8	2 pc. RST-S 2NC, 1 pc. RST-S 2NO / M8 plug
A	1 pc. EST-S NPN / M8 plug
B	2 pc. EST-S NPN / M8 plug
C	3 pc. EST-S NPN / M8 plug
D	1 pc. EST-S PNP / M8 plug
E	2 pc. EST-S PNP / M8 plug
F	3 pc. EST-S PNP / M8 plug
see page 165 ff	

Profile mounting *	
0	Without
1	1 pair type E1
2	1 pair type D1
3	1 pair type MAE
4	2 pair type E1
5	2 pair type D1
6	2 pair type MAE
7	3 pair type E1
8	3 pair type D1
9	3 pair type MAE
see page 141ff	
K	1 pair trunnion mounting EN
L	1 pair trunnion EN and pivot mounting EL
see page 154	

End cap mounting *	
0	Without
1	1 pc. type A1SR (size 25 and 32) or C1SR (size 50)
2	1 pc. type C-E
see pages 141 ff	

Accessories - please order separately

Description	Page
Motor mounting	137 ff
Multi-axis system for actuators	177 ff

OSP-E..STR

Trapezoidal Screw Actuator with Internal Plain Bearing Guide and Piston Rod



Contents

Description	Page
Overview	90
Technical Data	93
Dimensions	95
Order Instructions	96

TRAPEZOIDAL SCREW ACTUATOR WITH INTERNAL PLAIN BEARING GUIDE AND PISTON ROD FOR INTERMITTENT APPLICATIONS


A completely new generation of actuators which can be integrated into any machine layout neatly and simply.


Advantages

- Accurate path and position control
- High force output
- Self-locking
- Excellent slow speed characteristics
- Easy installation
- Low maintenance
- Ideal for level regulation, lifting and other applications with intermittent operations

Features

- Piston rod-end dimensions conforming to ISO pneumatic standards
- Complete motor and control packages
- Diverse range of accessories and mountings
- Special options available

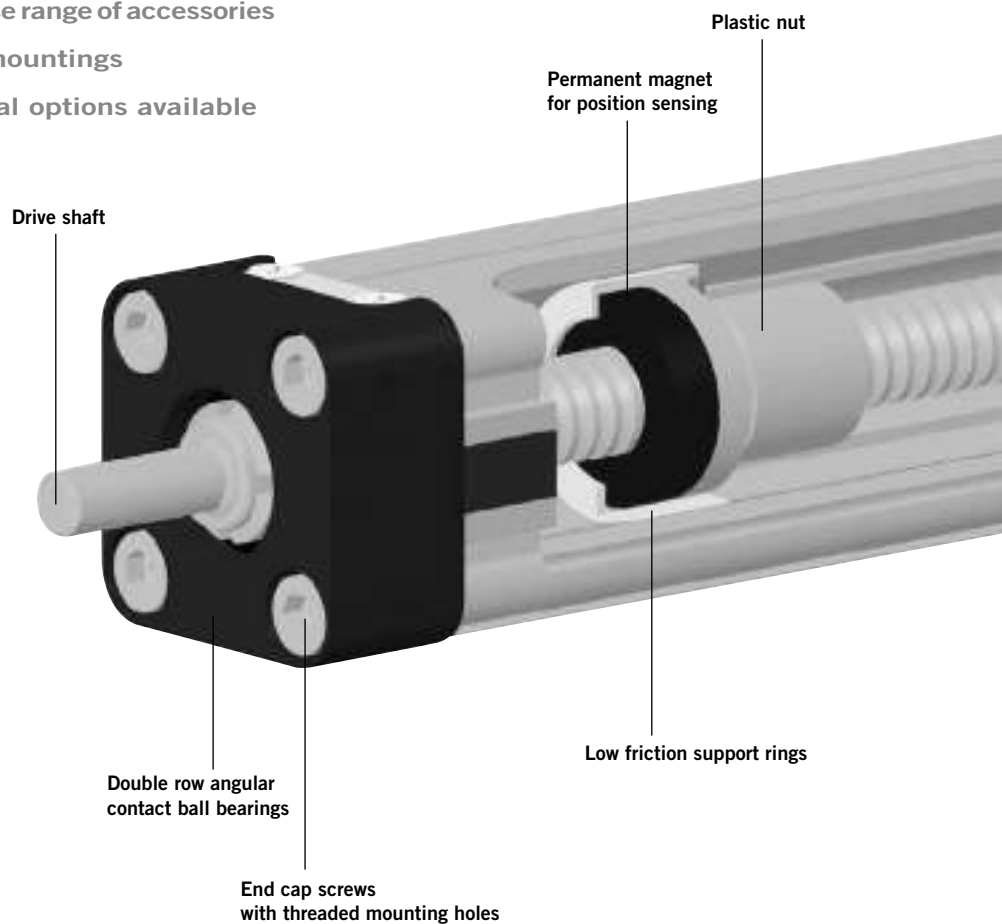

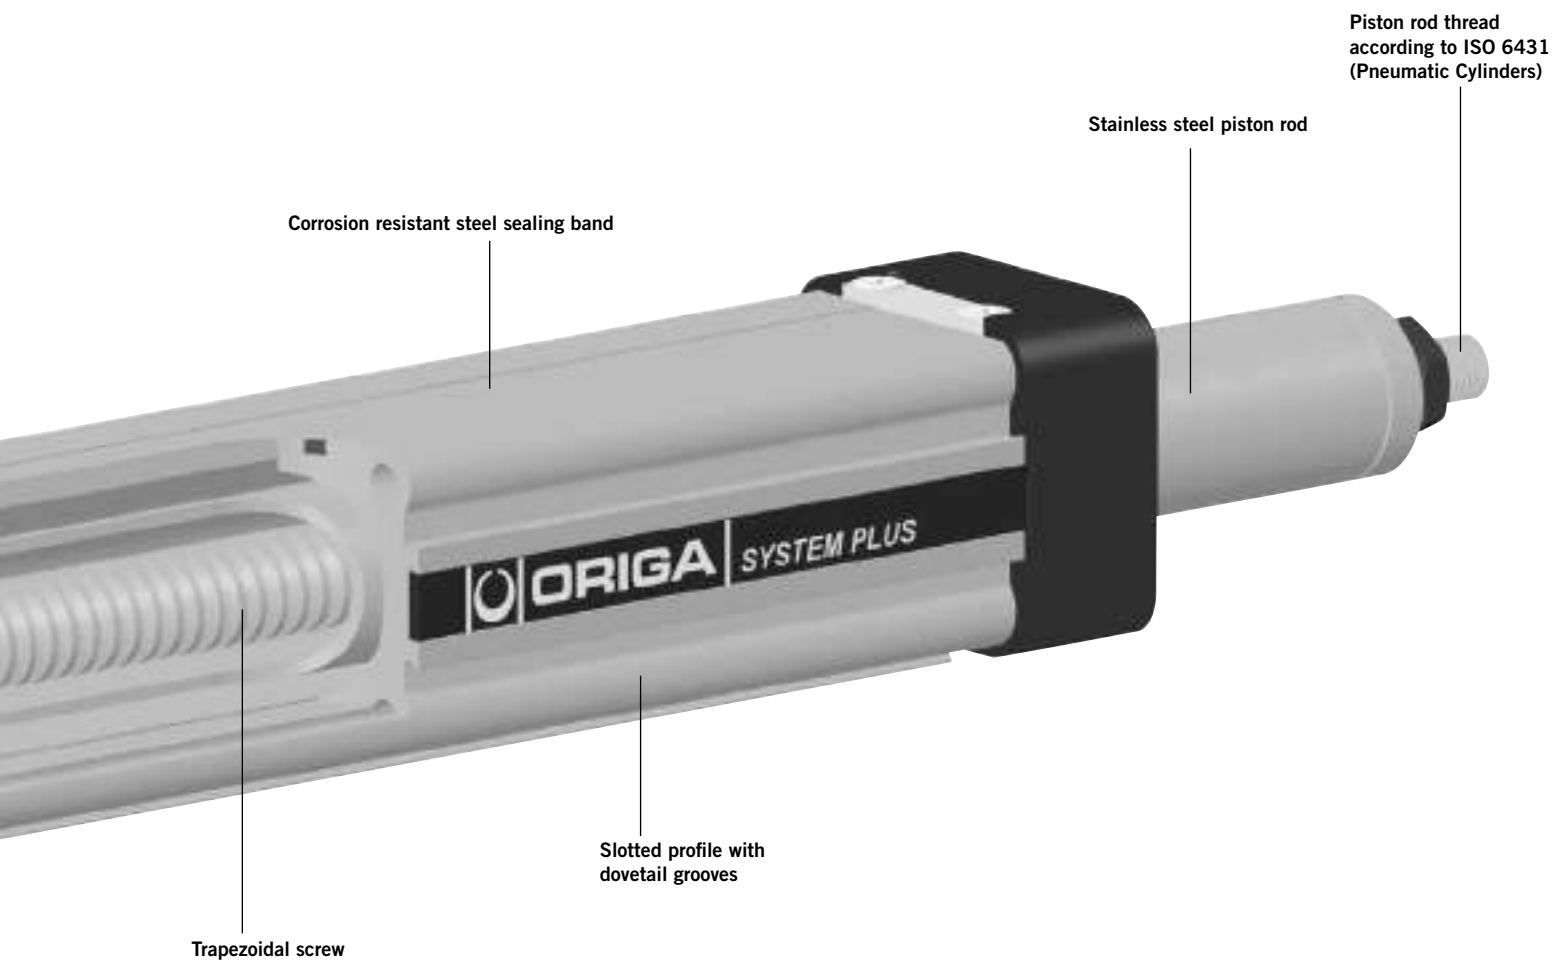

Take the easy route and load all the dimensions into your system. The file is suitable for all current CAD systems – available on CD-Rom or at www.parker-origa.com



OPTIONS AND ACCESSORIES

OSP-E..STR TRAPEZOIDAL SCREW ACTUATOR WITH INTERNAL PLAIN BEARING GUIDE AND PISTON ROD

STANDARD VERSIONS

OSP-E..STR

Standard piston rod with internal guidance and integrated magnet set for contactless position sensing. Dovetail profile for mounting of accessories and the actuator itself.



ACCESSORIES

MOTOR MOUNTINGS



END CAP MOUNTING

For end-mounting the actuator on the extending rod side.


Flange Mounting C

For end-mounting the actuator on the extending rod side.



PROFILE MOUNTING

For mounting the actuator on the dovetail grooves and on the motor end.

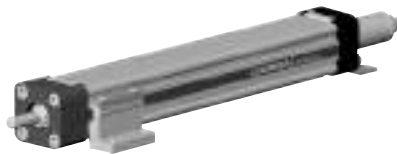

Trunning mounting EN in combination with pivot mounting EL.

– steplessly adjustable in axial direction.



COMPENSATION

Piston Rod eye



Piston rod Clevis



Piston Rod compensating coupling

For compensating of radial and angular misalignments



MAGNETIC SWITCHES SERIES RST AND EST

For contactless position sensing of end stop and intermediate carrier positions.



OSP-E..STR Trapezoidal Screw Actuator with internal Plain Bearing Guide and Piston Rod

Size 25, 32, 50



Characteristics			
Characteristics	Symbol	Unit	Description
General Features			
Series			OSP-E..STR
Name			Trapezoidal Actuator with internal Plain Bearing Guide and Piston Rod
Mounting			See drawings
Temperature Range	ϑ_{\min} ϑ_{\max}	°C °C	-20 +70
Weight (mass)		kg	See table
Installation			In any position
Material	Slotted profile		Extruded anodized aluminium
	Trapezoidal screw		Cold rolled steel
	Drive nut		Thermoplastic polyester
	Piston rod		Stainless steel
	Sealing band		Hardened, corrosion resistant steel
	Guide bearings		Low friction plastic
	Screws, nuts		zinc plated steel
	Mountings		zinc plated steel and aluminium
Encapsulation class		IP	54

Weight (mass) and Inertia						
Series	Weight (mass)[kg]		Moving mass [kg]		Inertia [x 10 ⁻⁶ kgm ²]	
	At stroke 0 m	Add per metre stroke	At stroke 0 m	Add per metre stroke	At stroke 0 m	Add per metre
OSP-E25STR	0.4	2.9	0.1	0.7	1.1	10.3
OSP-E32STR	0.9	5.4	0.2	1.2	3.9	29.6
OSP-E50STR	2.4	10.6	0.8	1.6	24.6	150

Installation Instructions

Use the threaded holes in the free end cap and a profile mounting close to the motor end for mounting the actuator.

The piston rod is not locked against rotation and needs to be guided externally. A compensation part e. g. piston rod eye (see order instructions page 96) is recommended.

Maintenance

All moving parts are long-term lubricated for a normal operational environment. Parker Origa recommends a check and lubrication of the actuator, and if necessary a change of wear parts, after an operation time of 12 months or 300 km travel of distance. Please refer to the operating instructions supplied with the actuator.

First service start-up


The maximum values specified in the technical data sheet for the different products must not be exceeded. Before taking the actuator as a machine into service, the user must ensure the adherence to the EC Machine Directive 2006/42/EG.

Contactless position sensing

Please use the magnetic switch mentioned below:

KL3096 (Type RS-K, normally closed, Reed-contact, with cable)

KL3098 (Type ES-S, Magnetic electronic, PNP-switch with DIN-plug)



Sizing Performance Overview Maximum Loadings

Sizing of Actuator

The following steps are recommended for selection :


1. Check that the maximum values in the adjacent chart and transverse force/stroke graph below are not exceeded.
2. Check the lifetime/travel distance in graph below.
3. When sizing and specifying the motor, the RMS-average torque must be calculated using the cycle time in application

Performance Overview				
Characteristics	Unit	Description		
Size		OSP-E25STR	OSP-E32STR	OSP-E50STR
Pitch	[mm]	3	4	5
Max. speed	[m/s]	0.075	0.1	0.125
Linear motion per revolution, drive shaft	[mm]	3	4	5
Max. rpm, drive shaft	[min ⁻¹]	1500 ²⁾	1500	1500
Max. effective action force F_A	[N]	800	1600	3300
Corresponding torque on drive shaft	[Nm]	1.35	3.4	9.25
No-load torque	[Nm]	0.3	0.4	0.5
Max. allowable torque on drive shaft	[Nm]	1.7	4.4	12
Self-locking force F_t ¹⁾	[N]	800	1600	3300
Typical repeatability	[mm/m]	±0,5	±0,5	±0,5
Max. Standard stroke length	[mm]	500	500	500


¹⁾ Related to screw types Tr 12x3, Tr 16x4, Tr 24x5
see page 93 – for inertia

²⁾ from 0,4 m stroke max. 1200 min-1 permissible

Transverse Force / stroke

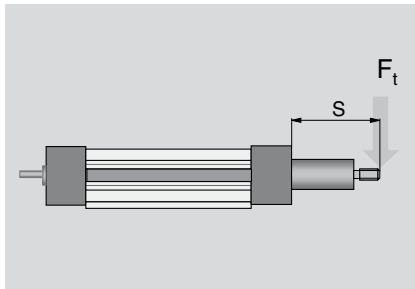


Transverse Force / Stroke

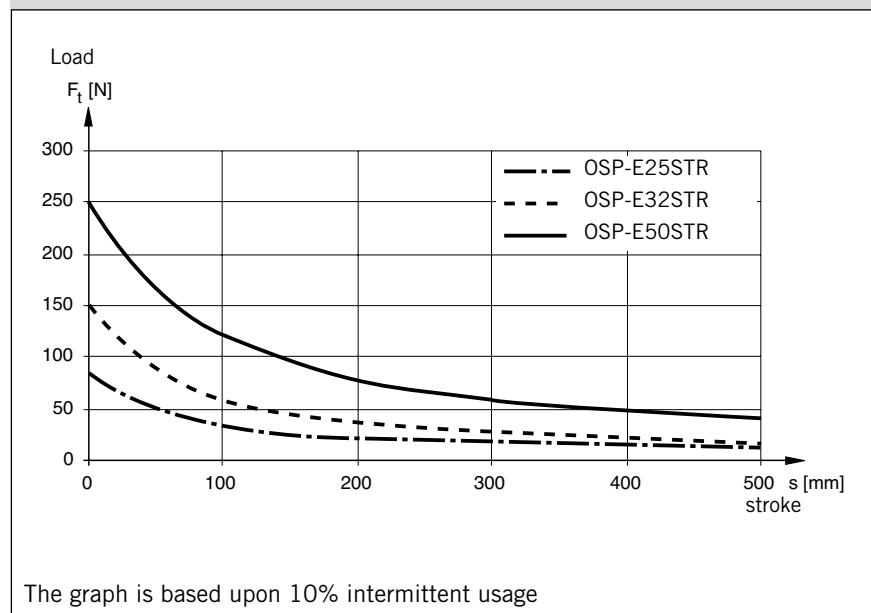


Performance / Action Force

The Actuators are designed for a 10% intermittent usage.
The performance to be expected depends on the maximum required actions force of the application.
An increase of the action force will lead to a reduced performance.


Performance as a function of the action force

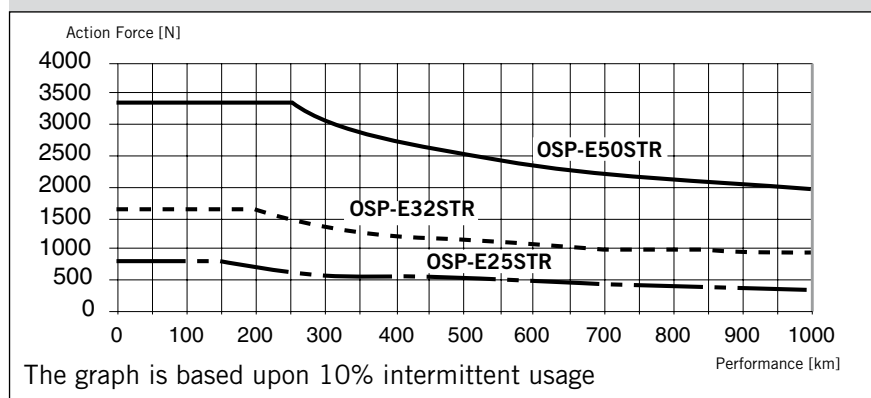

OSP-E..STR
Trapezoidal Screw Actuator with internal Plain Bearing Guide and Piston Rod – Basic Unit

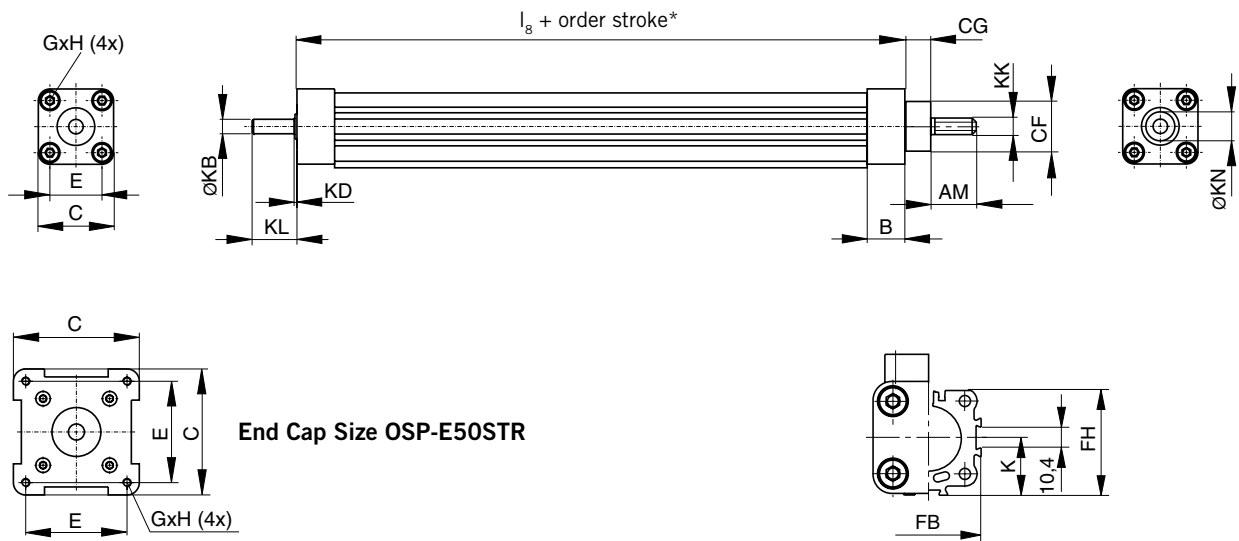

Plain shaft with keyway (Option)

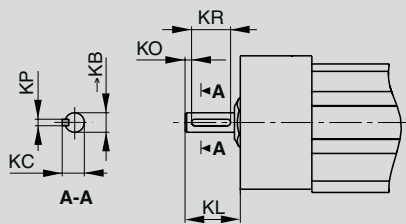

Dimension Table [mm]

Series	∅KB _{h7}	KC	KL Opt.3	Opt.4	KO	KP ^{P9}	KR
OSP-E25STR	6	6.8	17	24	2	2	12
OSP-E32STR	10	11.2	31	41	5	3	16
OSP-E50STR	15	17.0	43	58	6	5	28

Option 3: Keyway
Option 4: Keyway long version

*** NOTE:**

The mechanical end position must not be used as a mechanical end stop. Allow an additional safety clearance at both ends equivalent to the linear movement of one revolution of the drive shaft, but at least 25 mm.

Order stroke = required travel + 2 x safety distance.

The use of an AC motor with frequency converter normally requires a larger safety clearance than that required for servo systems. For further information, please contact your local Parker Origa representative.

Dimension Table [mm]

Series	B	C	E	G x H	K	I _g	AM	CF	CG	FB	FH	KB	KD	KK	KL	KN
OSP-E25STR	22.0	41	27	M5 x10	21.5	83	20	22	26	40	39.5	6 _{h7}	2	M10x1.25	17	13
OSP-E32STR	25.5	52	36	M6 x12	28.5	94	20	28	26	52	51.7	10 _{h7}	2	M10x1.25	31	20
OSP-E50STR	33.0	87	70	M6 x12	43.0	120	32	38	37	76	77.0	15 _{h7}	3	M16x1,5	43	28

Order Instructions	OSPE25	—	3	0	3	0	0—	00000	—	0	0	0	0	0	0
---------------------------	--------	---	---	---	---	---	----	-------	---	---	---	---	---	---	---

Size of drive	
25	Size 25
32	Size 32
50	Size 50

Type of drive	
3	Trapezoidal screw actuator with internal plain bearing guide and piston rod

Pitch	
3	3 mm (for size 25)
4	4 mm (for size 32)
5	5 mm (for size 50)

* Option

Gear mounting *				
Size		25	32	50
0	without	x	x	x
1	LP050 i = 5	x	x	
2	LP050 i = 10	x	x	
3	LP070 i = 3		x	x
4	LP070 i = 5		x	x
5	LP070 i = 10		x	x

Info: For gears the mounting kit of the motor must be specified.
 LP050: A0, A1, A2
 LP070: A1, A2, A3

Order stroke
5 digits input in mm

Drive Shaft	
0 —	Plain Shaft
3 —*	Keyway
4 —*	Long with keyway

Mounting Kit for Motor and Gear *				
Size		25	32	50
A0	SY563T	x ¹	x ¹	
A1	SY873T	x ¹	x ¹	x ¹
A2	SMx60 xx xxx 8 11 ...	x ¹	x ¹	
A3	SMx82 xx xx 8 14 ...		x ¹	x ¹
A7	PS60		x ¹	x ¹
C0	LP050 / PV40-TA	x ¹	x ¹	
C1	LP070 / PV60-TA		x ¹	x ¹

x¹: If a mounting kit is selected the **drive shaft** is a plain shaft

Info: Motor and Gear mounting dimensions see page 193

Piston rod mounting *	
0	Without
T	Piston rod eye
U	Piston rod clevis
V	Piston rod compensating coupling
see page 155 ff	

Niro	
0	Standard
1*	Niro screws

Magnetic switches *	
0	Without
1	1 pc. RS-K 2NO / 5m cable
2	1 pc. RS-K 2NC / 5m cable
3	2 pc. RS-K 2NC / 5m cable
4	2 pc. RS-K 2NC, 1 pc. RS-K 2NO / 5m cable
D	1 pc. ES-S PNP / M8 plug
E	2 pc. ES-S PNP / M8 plug
F	3 pc. ES-S PNP / M8 plug
see page 165 ff	


Profile mounting *	
0	Without
1	1 pair type E1
2	1 pair type D1
3	1 pair type MAE
4	2 pair type E1
5	2 pair type D1
6	2 pair type MAE
7	3 pair type E1
8	3 pair type D1
9	3 pair type MAE
see page 141 ff	
K	1 pair trunnion mounting EN
L	1 pair trunnion EN and pivot mounting EL
see page 154	

End cap mounting *	
0	Without
1	1 pc. type A1SR (size 25 and 32) or C1SR (size 50)
2	1 pc. type C-E
see pages 141 ff	

Accessories - please order separately

Description	Page
Motor mountings	137 ff
Multi-Axis Systems for actuators	177 ff

Linear Guides

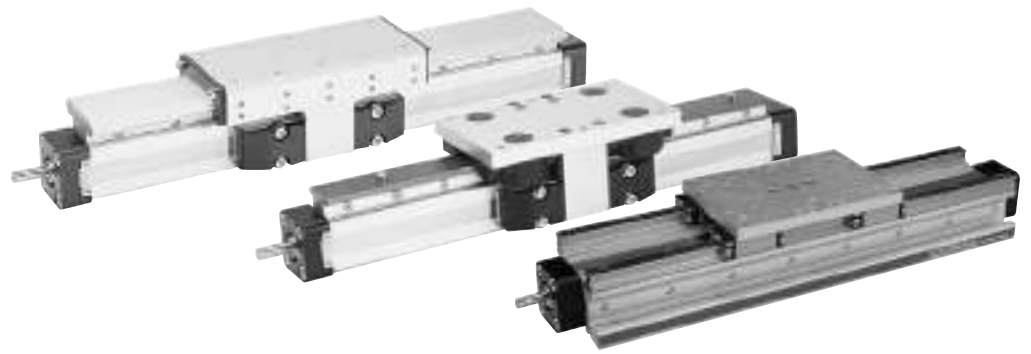

Contents

Description	Page
Overview	100
SLIDELINE - Plain Bearing Guide	101
POWERSLIDE - Roller Guide	103
PROLINE - Aluminium Roller Guide	107
HD - Heavy-duty guide	111

OSP

ORIGA
SYSTEM
PLUS

Adaptive modular system

The Origa system plus – OSP – provides a comprehensive range of linear guides for the pneumatic and electric actuators.

Versions:

Electric actuator

Series:

- OSP-E..B
- OSP-E..SB
- OSP-E..ST

• Sizes:

25 - 32 - 50

Advantages:

- takes high loads and moments
- high precision
- smooth operation
- can be retrofitted
- can be installed in any position

Linear Guides

Electric actuator

- Series OSP-E..B (Belt)
- Series OSP-E..SB (Ball Screw)
- Series OSP-E..ST (Trapezoidal Screw)



SLIDELINE

The cost-effective plain bearing guide for medium loads.

- for screw actuators only
- Series OSP-E..SB, OSP-E..ST

See page 101 ff



POWERSLIDE

The roller guide for heavy loads.


See page 103 ff



PROLINE

The ball bushing guide for heavy loads and speed.

See page 107 ff

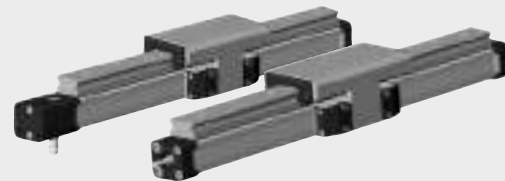



HD-Guide (heavy-duty guide)

The ball bearing guide for the heaviest loads and greatest accuracy.

- for Screw Actuators only
- Series OSP-E..SB, OSP-E..ST

See page 111 ff

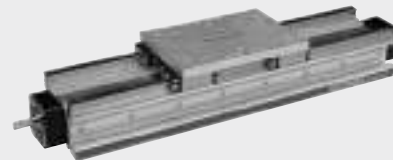

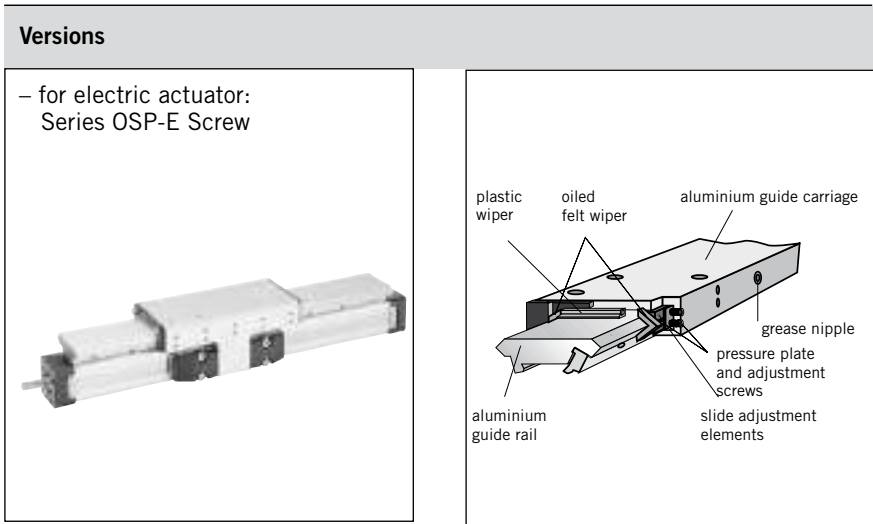

SLIDELINE Plain Bearing Guide



Series SL 25 to 50
for Actuator
• Series OSP-E Screw


Technical Data

The table shows the maximum permissible values for smooth operation, which must not be exceeded even under dynamic conditions.

The load and moment figures apply to speeds $v < 0.2$ m/s.

Features:

- anodised aluminium guide rail with prism-shaped slideway arrangement
- adjustable plastic slide elements
- composite sealing system with plastic and felt wiper elements to remove dirt and lubricate the slideways.
- corrosion-resistant version available on request.

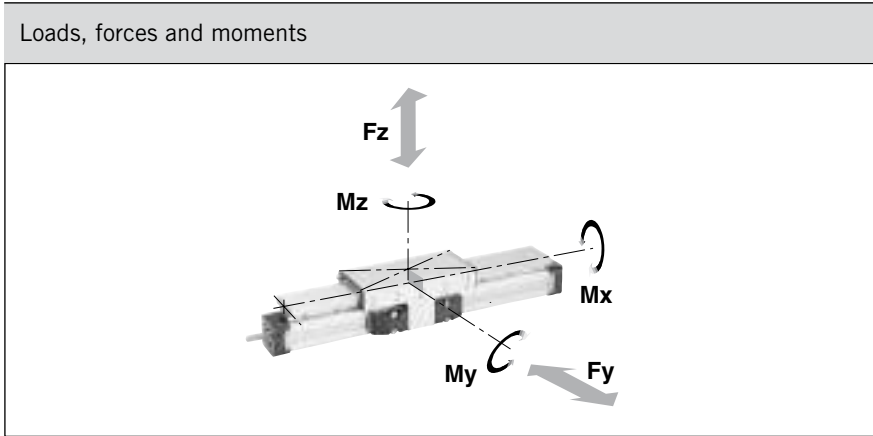


Series	Max. Moments [Nm]			Max. Load [N]	Mass of Drive with guide [kg]		Weight carriage [kg]	Order No.
	M _x	M _y	M _z		F	0 mm stroke OSP-E Screw		
SL 25	14	34	34	675	1.8	0.42	0.61	20342
SL 32	29	60	60	925	3.6	0.73	0.95	20196
SL 50	77	180	180	2000	8.7	1.44	2.06	20195

¹⁾ Corrosion resistant fixtures available on request

Dimensions

Series OSP-E Screw

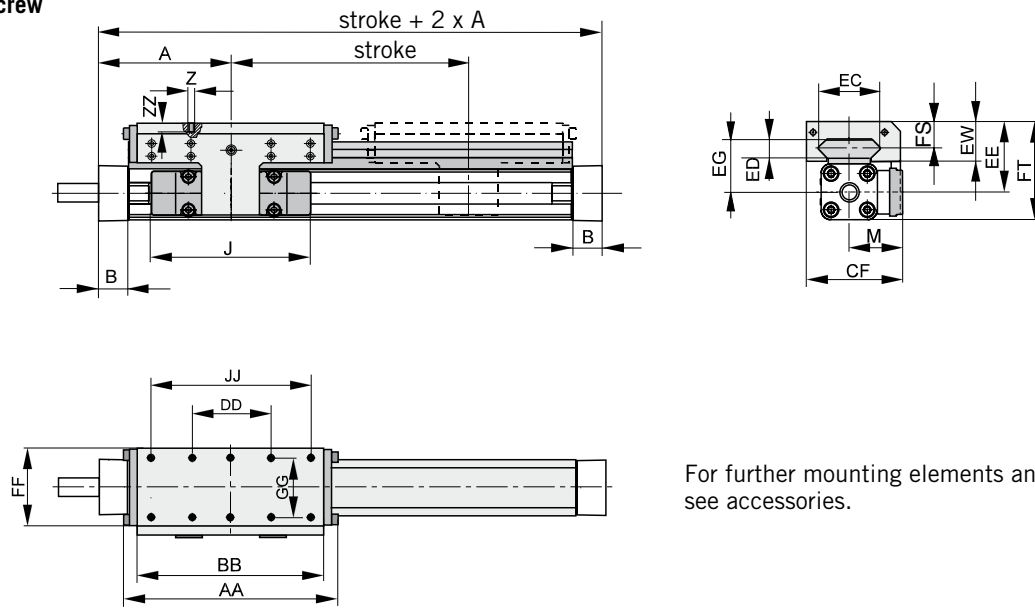

For further mounting elements and options see accessories.




Dimension Table [mm]

Series	A	B	J	M	Z	AA	BB	DD	CF	EC	ED	EE	EG	EW	FF	FT	FS	GG	JJ	ZZ
SL25	100	22.0	117	40.5	M6	162	142	60	72.5	47	12	53	39	30	64	73.5	20	50	120	12
SL32	125	25.5	152	49.0	M6	205	185	80	91	67	14	62	48	33	84	88.0	21	64	160	12
SL50	175	33.0	200	62.0	M6	284	264	120	117	94	14	75	56	39	110	118.5	26	90	240	16

Guide Mounting


(see page 149)

Guide mountings are required from a certain stroke length to prevent excessive deflection and vibration of the actuator. The diagrams show the maximum permissible unsupported length in relation to loading.

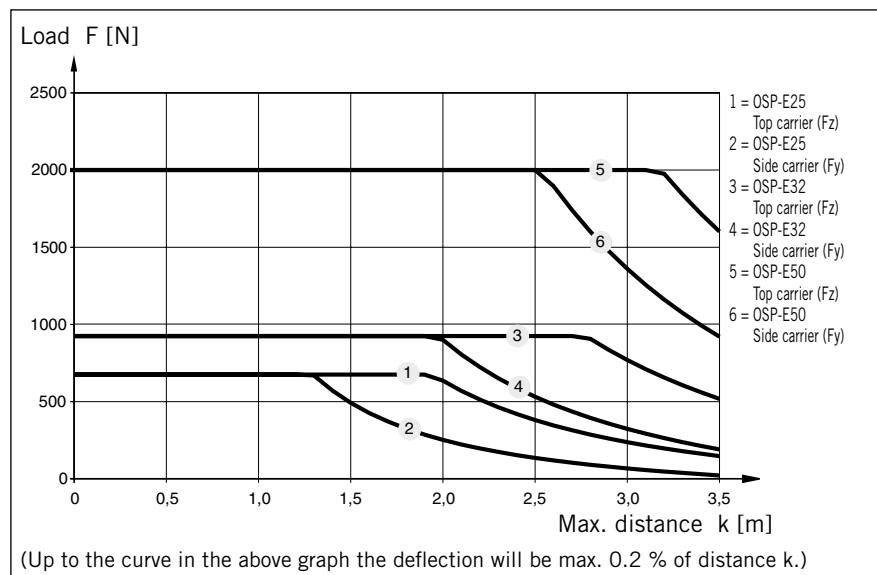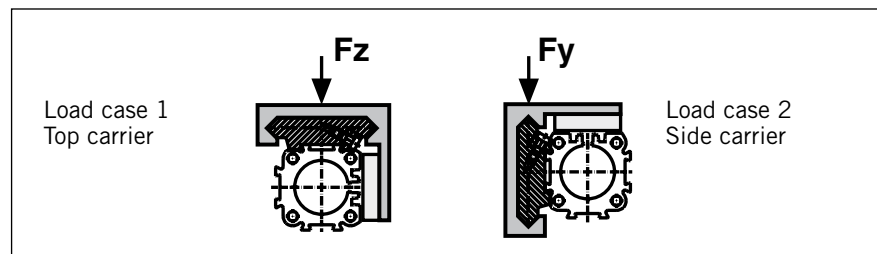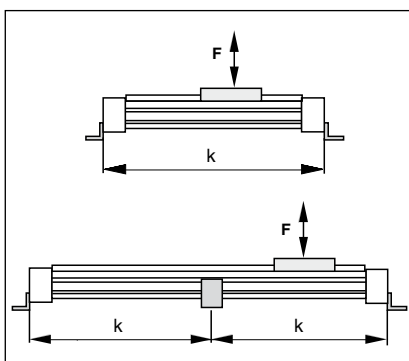

Versions

– for electric actuator:
Series OSP-E Belt
Series OSP-E Screw

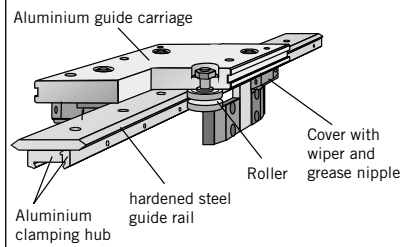

POWERSLIDE Roller Guide

OSP
— ORIGA
— SYSTEM
— PLUS

Series PS 25 to 50
for Actuator

- Series OSP-E Belt *
- Series OSP-E Screw

Technical Data

The Table shows the maximum permissible values for smooth operation, which must not be exceeded even under dynamic conditions.

For further information and technical data see data sheets for actuators.

Features:


- anodised aluminium guide carriage with vee rollers having 2 rows of ball bearings
- hardened steel guide rail
- several guide sizes can be used on the same drive
- max. speed $v = 3$ m/s
- tough roller cover with wiper and grease nipple
- any length of stroke up to 3500 mm (longer strokes on request). The maximum stroke lengths of actuators OSP-E..B, OSP-E..SB and OSP-E..ST must be observed.

OSP-E Belt:

For position of guides see page 109

- * Series PS for OSP-E Bi-parting version on request


Loads, forces and moments

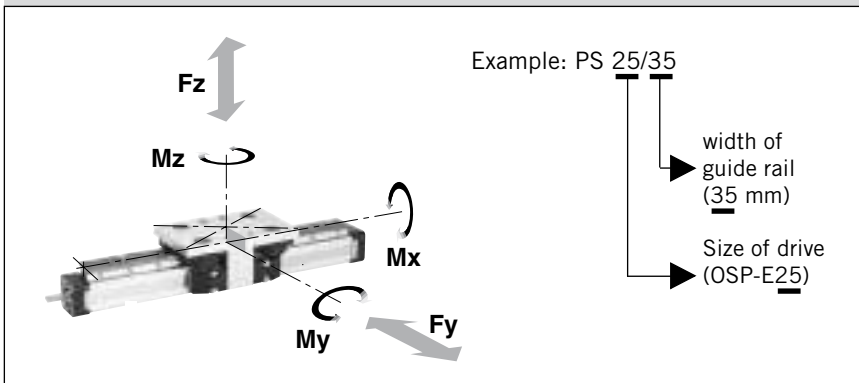

Series	Max. Moments [Nm]			Max. Load [N] Fy, Fz	Mass of drive with guide [kg] with 0 mm stroke				Mass * of guide carriage [kg]	Order No. Powerslide for	
	Mx	My	Mz		OSP-E Belt	OSP-E Screw	increase per 100 mm stroke OSP-E Belt	OSP-E Screw		OSP-E* Belt	OSP-E Screw
PS 25/25	14	63	63	910	1.9	1.8	0.30	0.37	0.7	20304	20015
PS 25/35	17	70	70	1010	2.1	1.9	0.34	0.41	0.8	20305	20016
PS 25/44	20	175	175	1190	3.0	2.7	0.42	0.49	1.5	20306	20017
PS 32/35	20	70	70	1400	3.1	3.2	0.51	0.63	0.8	20307	20286
PS 32/44	50	175	175	2300	4.0	4.1	0.59	0.70	1.5	20308	20287
PS 50/60	90	250	250	3000	8.8	8.7	1.04	1.36	2.3	20309	20288
PS 50/76	140	350	350	4000	12.2	12.0	1.28	1.6	4.9	20310	20289

For Mountings see page 149.


Dimensions – Series OSP-E Belt

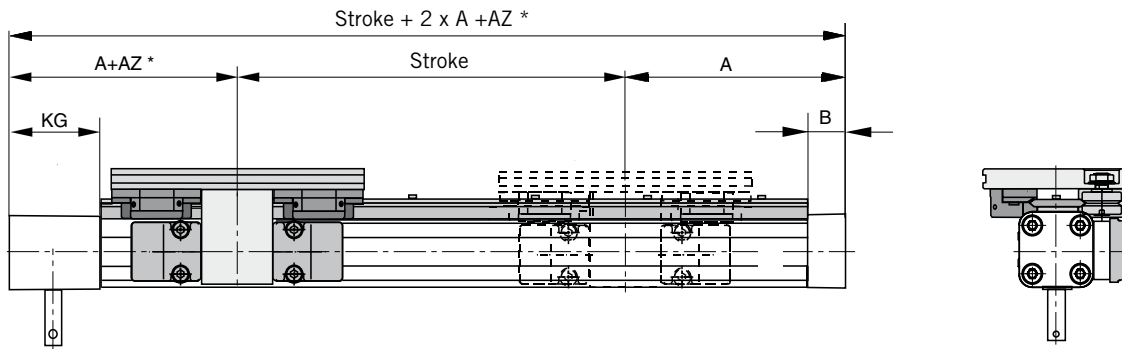

*** Please note**

The dimension „AZ“ must be added to „A“. Stroke length to order is stroke + dimension „AZ“ + safety clearance.
Please also note the effect of dimension „AZ“ when retrofitting a guide – contact your local Parker Origa technical support department.

Dimensions – Series OSP-E Screw

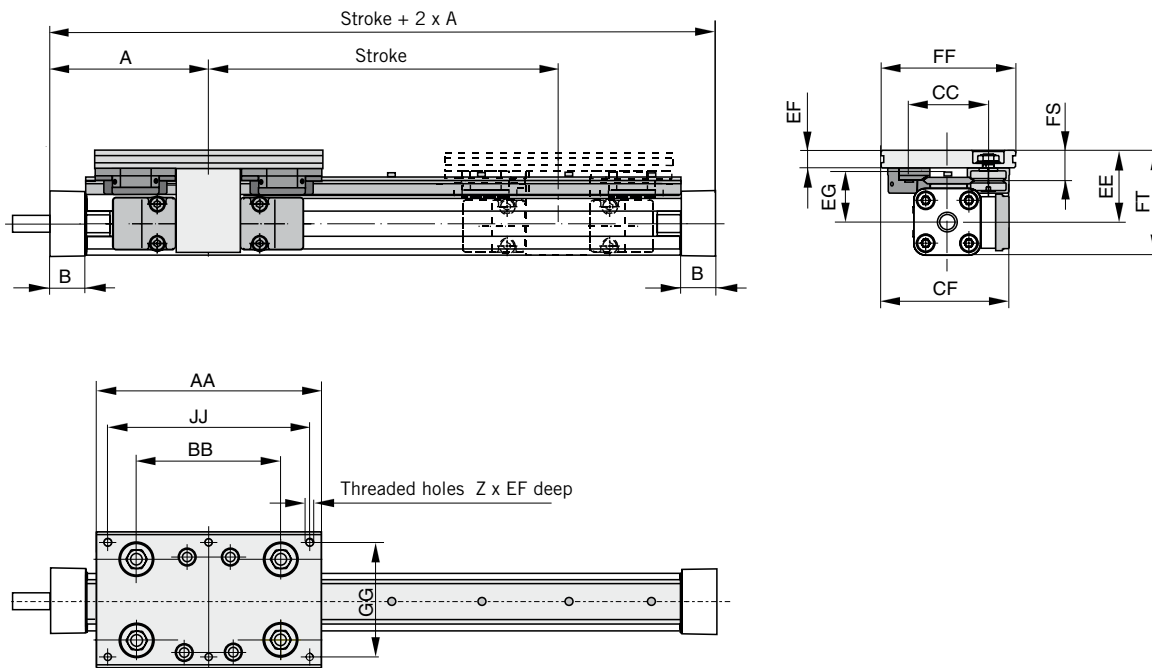

Dimension Table [mm]


Series	A		B		Z	AA	AZ	BB	CC	CF	EE	EF	EG	FF	FS	FT	GG	JJ	KG
	OSP-E Belt	OSP-E Screw	OSP-E Belt	OSP-E Screw															
PS 25/25	125	100	22	22.0	6xM6	145	5	90	47	79.5	53.0	11.0	39.0	80	20.0	73,5	64	125	57
PS 25/35	125	100	22	22.0	6xM6	156	10	100	57	89.5	52.5	12.5	37.5	95	21.5	73.0	80	140	57
PS 25/44	125	100	22	22.0	6xM8	190	27	118	73	100	58.0	15.0	39.0	116	26.0	78.5	96	164	57
PS 32/35	150	125	25	25.5	6xM6	156	-	100	57	95.5	58.5	12.5	43.5	95	21.5	84.5	80	140	61
PS 32/44	150	125	25	25.5	6xM8	190	6	118	73	107	64.0	15.0	45.0	116	26.0	90.0	96	164	61
PS 50/60	200	175	25	33.0	6xM8	240	5	167	89	130.5	81.0	17.0	61.0	135	28.5	123.5	115	216	85
PS 50/76	200	175	25	33.0	6xM10	280	25	178	119	155.5	93.0	20.0	64.0	185	39.0	135.5	160	250	85

OSP-E Belt – If combined with a linear guide, please also state position of linear guide


**Position of Drive Shaft
Standard = 0**

Position of Linear Guide

Standard
Position of the guide on the opposite side of the drive shaft




Opposite to Standard
Position of the guide on the side of the drive shaft




**Position of Drive Shaft
Opposite to Standard = 1**

Position of Linear Guide

Standard
Position of the guide on the opposite side of the drive shaft




Opposite to Standard
Position of the guide on the side of the drive shaft




**Position of Drive Shaft
Both Sides = 2**

Position of Linear Guide


Standard
Position of the guide on the opposite side of the drive shaft



Opposite to Standard
Position of the guide on the side of the drive shaft



Load Case 1 – Top Carrier

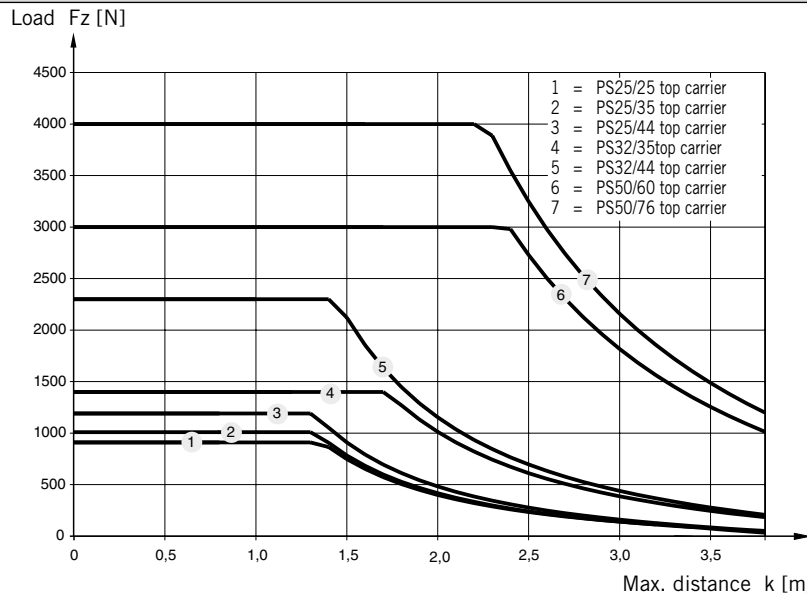


(Up to the curve in the above graph the deflection will be max. 0.2 % of distance k.)

Guide Mounting

(see page 149)


Guide mountings are required from a certain stroke length to prevent excessive deflection and vibration of the actuator. The diagrams show the maximum permissible unsupported length in relation to loading.




Load case 1
Top carrier

Load case 2
Side carrier

Load Case 2 – Side Carrier

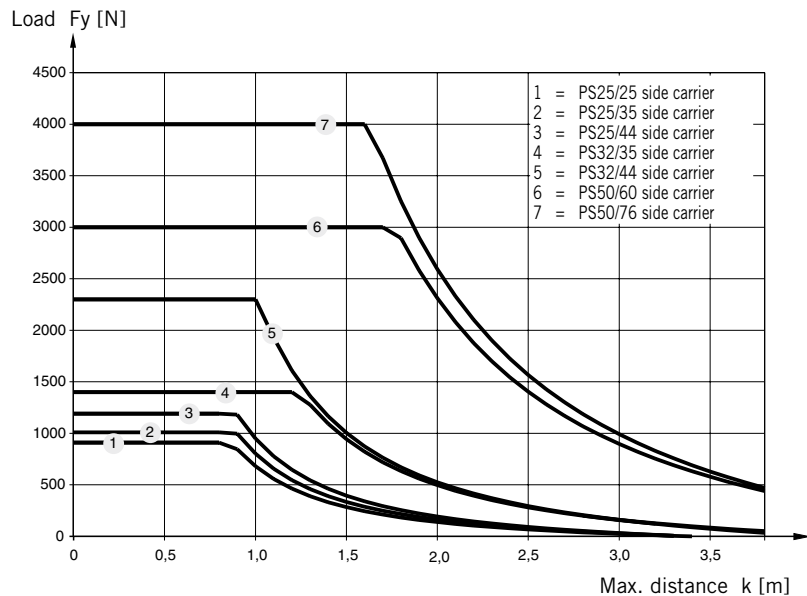

(Up to the curve in the above graph the deflection will be max. 0.2 % of distance k.)

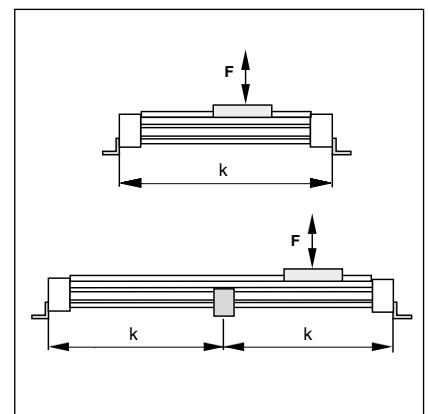

Performance

Calculation of performance is achieved in two stages:

- Determination of load factor L_F from the loads to be carried
- Calculation of service life in km

1. Calculation of load factor L_F

$$L_F = \frac{F_y}{F_{y_{\max}}} + \frac{F_z}{F_{z_{\max}}} + \frac{M_x}{M_{x_{\max}}} + \frac{M_y}{M_{y_{\max}}} + \frac{M_z}{M_{z_{\max}}}$$

with combined loads, L_F must not exceed the value 1

Lubrication

For maximum system life, lubrication of the rollers must be maintained at all times.

Only high quality lithium-based greases should be used.


Lubrication intervals are dependent on environmental conditions (temperature, running speed, grease quality etc.) therefore the installation should be regularly inspected.

2. Calculation of Performance

• For PS 25/25, PS 25/35 and PS 32/35:	Service life [km] = $\frac{106}{(L_F + 0,02)^3}$
• For PS 25/44, PS 32/44 and PS 50/60:	Service life [km] = $\frac{314}{(L_F + 0,015)^3}$
• For PS 50/76:	Service life [km] = $\frac{680}{(L_F + 0,015)^3}$

Versions

- For electric Actuator
Series OSP-E Belt
Series OSP-E Screw

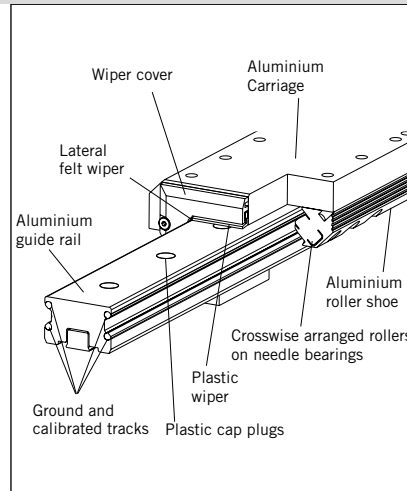

PROLINE Aluminium Roller Guide

OSP
ORIGA
SYSTEM
PLUS

Series PL 25 to 50
for Acuator

- Series OSP-E Belt *
- Series OSP-E Screw

Technical Data

The table shows the maximum permissible loads. If multiple moments and forces act upon the cylinder simultaneously, the following equation applies:

$$\frac{F_y}{F_{y_{\max}}} + \frac{F_z}{F_{z_{\max}}} + \frac{M_x}{M_{x_{\max}}} + \frac{M_y}{M_{y_{\max}}} + \frac{M_z}{M_{z_{\max}}} \leq 1$$


The table shows the maximum permissible values for light, shock-free operation, which must not be exceeded even under dynamic conditions.

With a load factor of ≤ 1 , the service life is 5000 km.
The sum of the loads must not exceed > 1 .

Features:

- High precision
- High velocities (10 m/s)
- Smooth operation – low noise
- Integrated wiper system
- Life time lubrication
- Compact dimensions - compatible to Slideline plain bearing guide
- Version available up to 3750 mm
The maximum stroke lengths of actuators OSP-E..B, OSP-E..SB and OSP-E..ST must be observed.

Loads, Forces and Moments

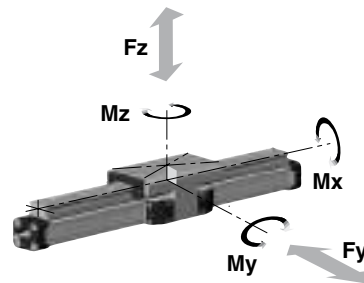


*Series PL for OSP-E Bi-parting version on request

Series	Max. Moments [Nm]			Max.Load [N]	Mass of Drive with guide [kg]				Mass guide carriage [kg]	Order No. PROLINE for	
	Mx	My	Mz		Fy, Fz	OSP-E Belt	OSP-E Screw	increase per 100 mm Stroke		OSP-E Belt	OSP-E Screw
PL 25	19	44	44	986	1.9	1.8	0.33	0.40	0.75	20874	20856
PL 32	33	84	84	1348	3.6	3.7	0.58	0.70	1.18	20875	20857
PL 50	128	287	287	3582	8.9	8.8	1.00	1.32	2.50	20876	20859

For Mountings see page 149

Dimensions Series OSP-E Belt PL25, PL32, PL50

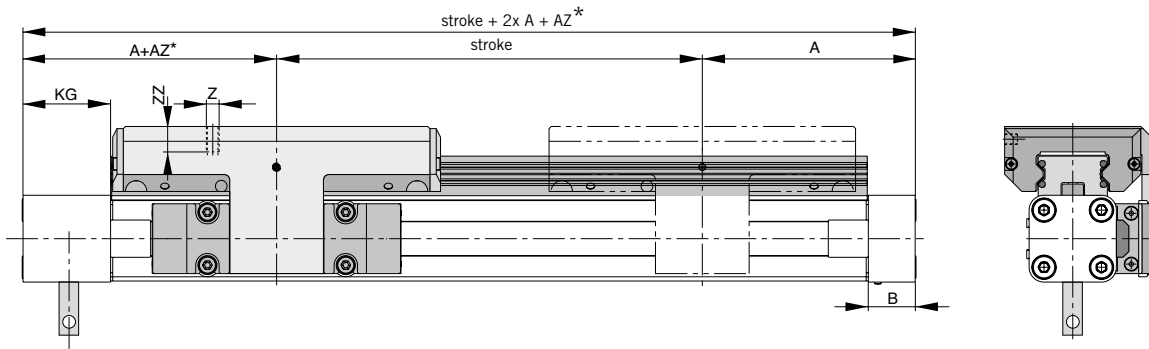


*** Please observe:**

Dimension "AZ" must be added to dimension "A". The stroke to be ordered will be: stroke + min. dimension "AZ" + additional length.
Please observe the effect of dimension "AZ" when retrofitting a guide. Please contact our application engineers.

Dimension Table [mm] Series OSP-E Belt PL25, PL32, PL50

Series	A	B	J	M	Z	AA	AZ	BB	DD	CF	EC	EE	EG	FF	FS	FT	GG	JJ	KG	ZZ
PL25	125	22	117	40.5	M6	154	10	144	60	72.5	32.5	53	39	64	23	74	50	120	57	12
PL32	150	25	152	49.0	M6	197	11	187	80	91.0	42.0	62	48	84	25	88	64	160	61	12
PL50	200	25	200	62.0	M6	276	24	266	120	117.0	63.0	75	57	110	29	118	90	240	85	16

Dimensions Series OSP-E Screw PL25, PL32, PL50

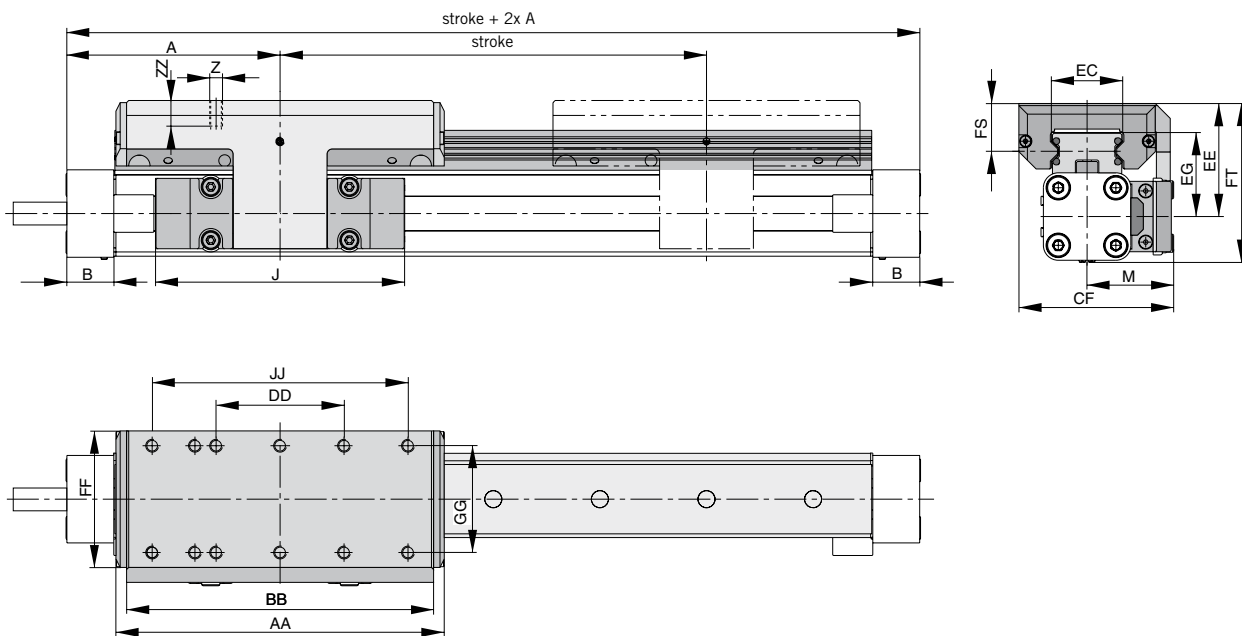

Dimension Table [mm] OSP-E Screw PL25, PL32, PL50


Series	A	B	J	M	Z	AA	BB	DD	CF	EC	EE	EG	FF	FS	FT	GG	JJ	ZZ
PL25	100	22.0	117	40.5	M6	154	144	60	72.5	32.5	53	39	64	23	74	50	120	12
PL32	125	25.5	152	49.0	M6	197	187	80	91.0	42.0	62	48	84	25	88	64	160	12
PL50	175	33.0	200	62.0	M6	276	266	120	117	63.0	75	57	110	29	118	90	240	16

OSP-E Belt – If combined with a linear guide, please also state position of linear guide


**Position of Drive Shaft
Standard = 0**

Position of Guide

Standard
Guide opposite the drive shaft




Opposite to Standard
Guide on same side as drive shaft




**Position of Drive Shaft
Opposite to Standard = 1**

Position of Guide

Standard
Guide opposite the drive shaft




Opposite to Standard
Guide on same side as drive shaft





**Position of Drive Shaft
Both Sides = 2**

Position of Guide

Standard
Guide opposite the drive shaft





Opposite to Standard
Guide on same side as drive shaft

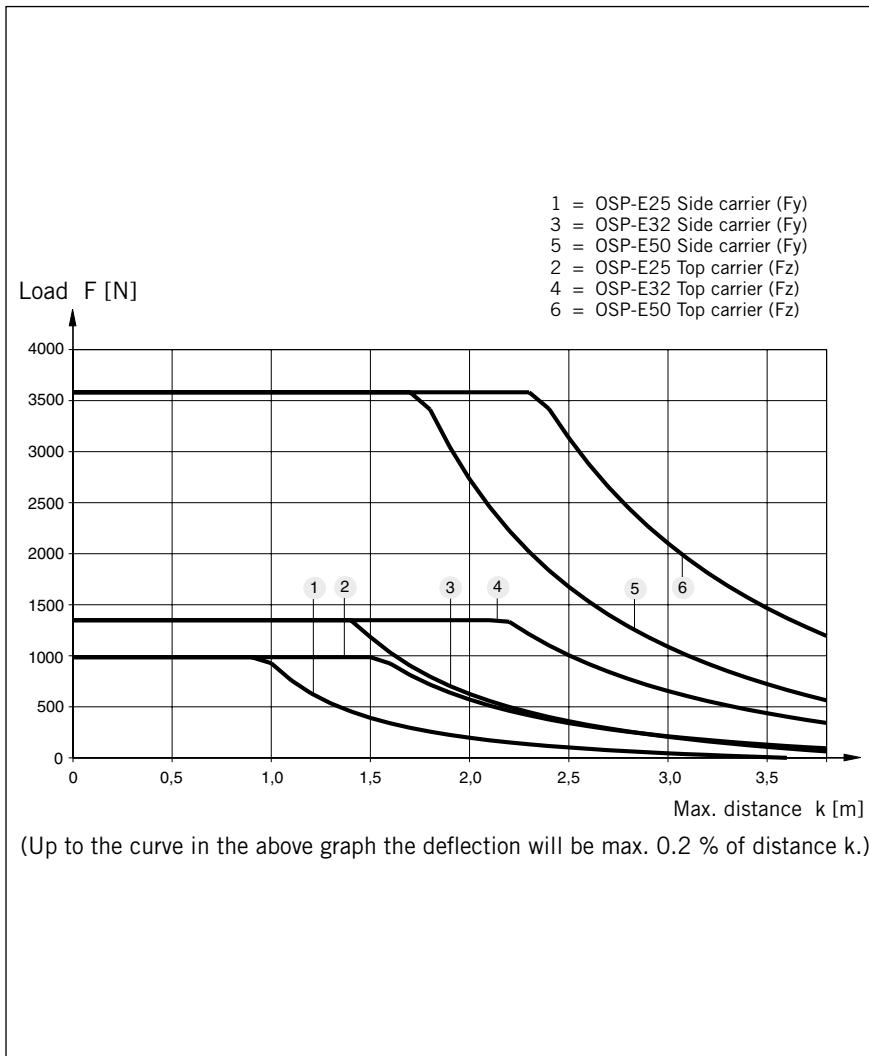
Guide Mounting

(see page 149)

Guide mountings are required from a certain stroke length to prevent excessive deflection and vibration of the actuator. The diagrams show the maximum permissible unsupported length in relation to loading.

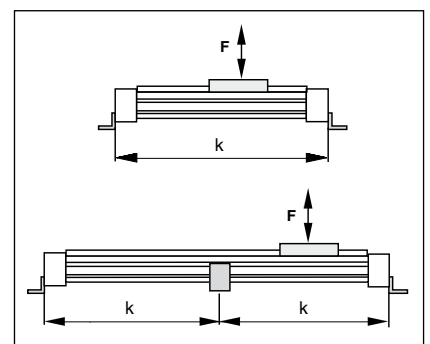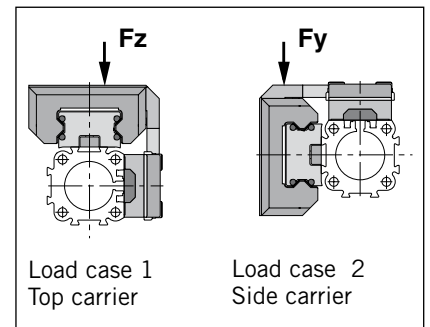

Version for Electric Actuator: Series OSP-E Screw

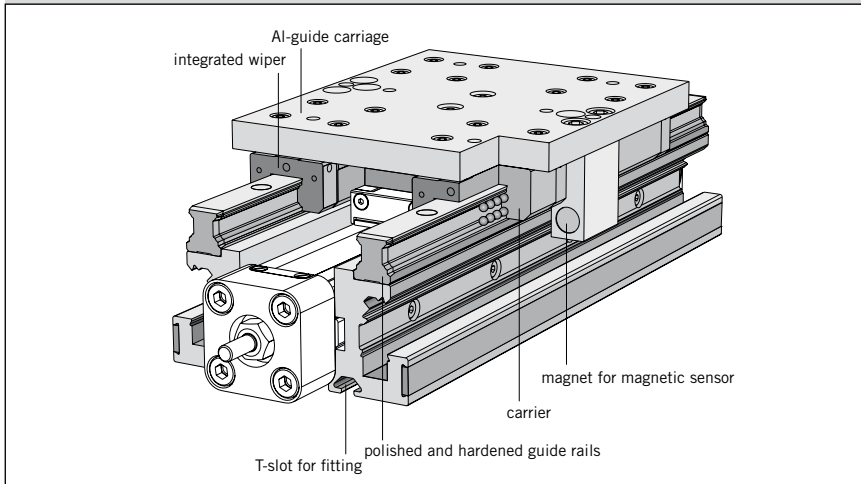


HD Heavy-duty-Guide




Series HD 25 to 50 for Actuator

- Series OSP-E..SB, ..ST

Loads, forces and moments

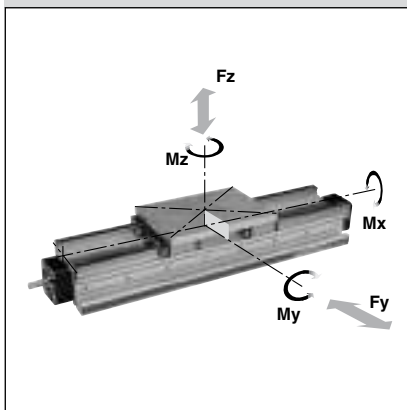

OSP-E..SB, ..ST

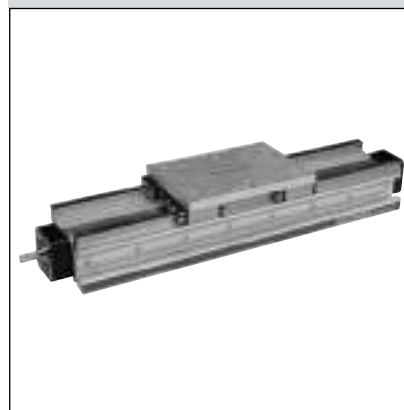

Technical Data

For the maximum permissible loads please refer to the table below. If several forces and moments loads act upon the guide simultaneously, the following equation will apply:

$$\frac{F_y}{F_{y_{max}}} + \frac{F_z}{F_{z_{max}}} + \frac{M_x}{M_{x_{max}}} + \frac{M_y}{M_{y_{max}}} + \frac{M_z}{M_{z_{max}}} \leq 1$$

The total of the loads must not exceed 1 under any circumstances.


The table shows the maximum permissible values for light, shock-free operation which must not be exceeded even under dynamic conditions.

Features:

- Guide system
 - 4-row ball bearing guide
- polished and hardened guide rails of steel
- for highest loads in all directions
- highest precision
- integrated wiper
- grease nipple for relubrication
- anodized guide carriage with the same connecting dimension s as OSP-guide GUIDELINE
- maximum velocity v = 5 m/s

Series	Max. Moments [Nm]			Max. Load [N]		Mass of actuator with guide [kg] at 0 mm stroke				Mass guide-carrier [kg]	Order No HD-guide for OSP-E
	Mx	My	Mz	Fy	Fz	ad per 100 mm stroke					
						OSP-E..SB	OSP-E..ST	OSP-E..SB	OSP-E..ST		
HD 25	260	320	320	6000	6000	3.215	3.315	0.957	1.007	1.289	21246
HD 32	285	475	475	6000	6000	4.868	4.968	1.198	1.258	1.367	21247
HD 50	1100	1400	1400	18000	18000	13.218	13.318	2.554	2.674	3.551	21249

Dimensions Series OSP-E Screw HD25, HD32, HD50

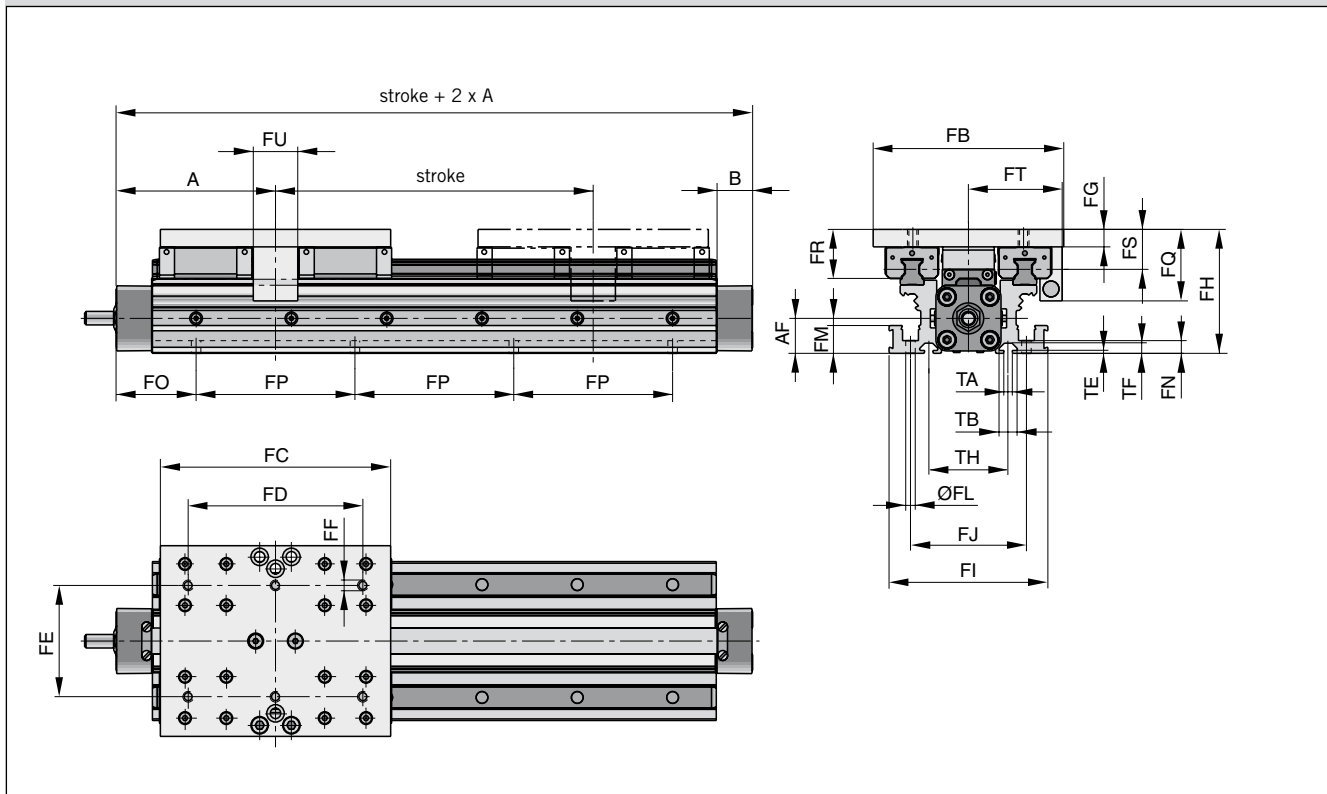


Hint:

The heavy-duty guide HD must be fitted to a level surface over the entire length.

If T-nuts are used, the distance between them must not exceed 100 mm.

Arrangement of magnetic switches:

The magnetic switches can be fitted to either side over the entire length.

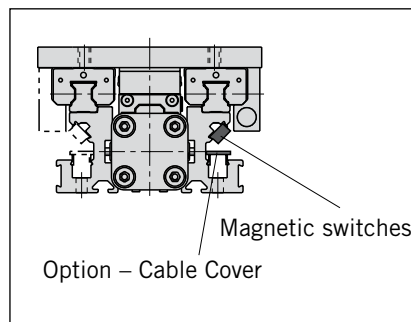

Dimension Table [mm]													
Series	A	B	AF	FB	FC	FD	FE	FF	FG	FH	FI	FJ	ØFL
HD25	100	22.0	22	120	145	110	70	M6	11	78	100	73	6.0
HD32	125	25.5	30	120	170	140	80	M6	11	86	112	85	6.0
HD50	175	33.0	48	180	200	160	120	M8	14	118	150	118	7.5

Series	FM	FN	FP	FQ	FR	FS	FT	FU	TA	TB	TE	TF	TH
HD25	17.5	8	100	45	31	25.0	59	28	5.2	11.5	1.8	6.4	50
HD32	17.5	8	100	45	31	25.0	63	30	5.2	11.5	1.8	6.4	60
HD50	22.0	10	100	58	44	35.5	89	30	8.2	20.0	4.5	12.3	76


FO			
OSP-E..SB, ..ST			
x	HD25	HD32	HD50
00	50.0	75.0	75.0
01	50.5	75.5	75.5
02	51.0	76.0	76.0
03	51.5	76.5	76.5
04	52.0	77.0	77.0
05	52.5	77.5	77.5
06	53.0	78.0	78.0
07	53.5	78.5	78.5
08	54.0	79.0	79.0
09	54.5	79.5	79.5
10	55.0	80.0	80.0
11	55.5	80.5	80.5
12	56.0	81.0	81.0
13	56.5	81.5	81.5
14	57.0	82.0	82.0
15	57.5	82.5	82.5
16	58.0	83.0	83.0
17	58.5	83.5	83.5
18	59.0	84.0	84.0
19	59.5	84.5	84.5
20	60.0	85.0	85.0
21	60.5	85.5	85.5
22	61.0	86.0	86.0
23	61.5	86.5	86.5
24	62.0	87.0	87.0
25	62.5	87.5	87.5
26	63.0	88.0	88.0
27	63.5	88.5	88.5
28	64.0	89.0	89.0
29	64.5	89.5	89.5
30	65.0	90.0	90.0
31	65.5	90.5	90.5
32	66.0	91.0	91.0
33	66.5	91.5	91.5
34	67.0	92.0	92.0
35	67.5	92.5	92.5
36	68.0	93.0	93.0
37	68.5	93.5	93.5
38	69.0	94.0	94.0
39	69.5	94.5	94.5
40	70.0	95.0	95.0
41	70.5	95.5	95.5
42	71.0	96.0	96.0
43	71.5	96.5	96.5
44	72.0	97.0	97.0
45	72.5	97.5	97.5
46	73.0	98.0	98.0
47	73.5	98.5	98.5
48	74.0	99.0	99.0
49	74.5	99.5	99.5

FO			
OSP-E..SB, ..ST			
x	HD25	HD32	HD50
50	75.0	50.0	50.0
51	75.5	50.5	50.5
52	76.0	51.0	51.0
53	76.5	51.5	51.5
54	77.0	52.0	52.0
55	77.5	52.5	52.5
56	78.0	53.0	53.0
57	78.5	53.5	53.5
58	79.0	54.0	54.0
59	79.5	54.5	54.5
60	80.0	55.0	55.0
61	80.5	55.5	55.5
62	81.0	56.0	56.0
63	81.5	56.5	56.5
64	82.0	57.0	57.0
65	82.5	57.5	57.5
66	83.0	58.0	58.0
67	83.5	58.5	58.5
68	84.0	59.0	59.0
69	84.5	59.5	59.5
70	85.0	60.0	60.0
71	85.5	60.5	60.5
72	86.0	61.0	61.0
73	86.5	61.5	61.5
74	87.0	62.0	62.0
75	87.5	62.5	62.5
76	88.0	63.0	63.0
77	88.5	63.5	63.5
78	89.0	64.0	64.0
79	89.5	64.5	64.5
80	90.0	65.0	65.0
81	90.5	65.5	65.5
82	91.0	66.0	66.0
83	91.5	66.5	66.5
84	92.0	67.0	67.0
85	92.5	67.5	67.5
86	93.0	68.0	68.0
87	93.5	68.5	68.5
88	94.0	69.0	69.0
89	94.5	69.5	69.5
90	95.0	70.0	70.0
91	95.5	70.5	70.5
92	96.0	71.0	71.0
93	96.5	71.5	71.5
94	97.0	72.0	72.0
95	97.5	72.5	72.5
96	98.0	73.0	73.0
97	98.5	73.5	73.5
98	99.0	74.0	74.0
99	99.5	74.5	74.5

NOTE:

The dimension FO is derived from the last two digits of the stroke:

Sample :



For a cylinder OSP-E25 the table shows that for x = 25 mm: FO = 62.5 mm

PS / RS Planetary / Angular Gears



Planetary Gears

Series

PS60, PS90, PS115

The requirements between transmissible power and size of gear is defined by the use and required resolution.

A gear can be used to reduce the required torque of the motor and to achieve a good inertia mismatch.

The PS gear boxes incorporate dual angular contact bearings, providing higher radial load capacities while maintaining high input speeds. The lifetime expectance of newly designed needle bearings is significantly high.

Maintenance

The PS series is lifetime lubricated.

Technical Data PS60								
Characteristics	Symbol	Unit	1-stage			2-stage		
Ratio	i		3	5	10	20	50	100
Nominal torque	T _{nom}	Nm	27	37	32	37	37	32
Maximum acceleration torque	T _{acc}	Nm	34	48	37	48	48	37
Emergency stop	T _{em}	Nm	80	70	60	70	70	60
Nominal speed	N _{nom}	min ⁻¹	3,000	3,500	4,000	4,500	4,800	5,200
Maximum speed	N _{max}	min ⁻¹	6,000					
Inertia	J	kgcm ²	0.25	0.15	0.14	0.15	0.13	0.13
Backlash		arcmin	<6			<8		
Efficiency at nominal torque	h	%	97			94		
Operating noise at 3000 min ⁻¹		dB(A)	<62					
Lifetime		h	>20,000					
Protection		IP	65					
Operating temperature		°C	- 20 to +90					
Weight	m	kg	1.3			1.7		


Technical Data PS90								
Characteristics	Symbol	Unit	1-stage			2-stage		
Ratio	i		3	5	10	20	50	100
Nominal torque	T _{nom}	Nm	76	110	93	110	110	93
Maximum acceleration torque	T _{acc}	Nm	105	123	112	123	123	112
Emergency stop	T _{em}	Nm	260	230	200	230	230	200
Nominal speed	N _{nom}	min ⁻¹	2,500	3,000	3,500	4,000	4,400	4,800
Maximum speed	N _{max}	min ⁻¹	5,500					
Inertia	J	kgcm ²	0.97	0.51	0.37	0.51	0.37	0.37
Backlash		arcmin	<6			<8		
Efficiency at nominal torque	η	%	97			94		
Operating noise at 3000 min ⁻¹		dB(A)	<62					
Lifetime		h	>20,000					
Protection		IP	65					
Operating temperature		°C	- 20 to +90					
Weight	m	kg	3.0			5.0		



Planetary Gears

Series
PS60, PS90, PS115

Technical Data PS115								
Characteristics	Symbol	Unit	1-stage			2-stage		
Ratio	i		3	5	10	20	50	100
Nominal torque	T _{nom}	Nm	172	230	205	230	230	205
Maximum acceleration torque	T _{acc}	Nm	225	285	240	285	285	240
Emergency stop	T _{em}	Nm	600	500	430	500	500	430
Nominal speed	N _{nom}	min-1	2,000	2,500	3,000	3,500	3,800	4,200
Maximum speed	N _{max}	min-1	4,500					
Inertia	J	kgcm ²	3.40	1.70	1.10	1.70	1.10	1.10
Backlash		arcmin	<4			<6		
Efficiency at nominal torque	h	%	97			94		
Operating noise at 3000 min ⁻¹		dB(A)	<65					
Lifetime		h	>20,000					
Protection		IP	65					
Operating temperature		°C	- 20 to +90					
Weight	m	kg	7.0			10.0		

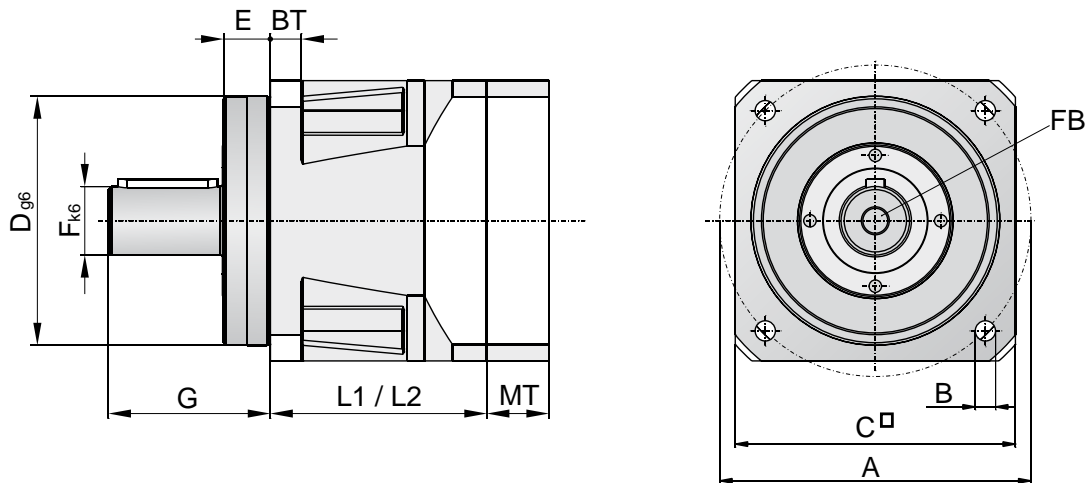

Dimension Table [mm]									
Type	∅ A	∅ B	BT	□C	∅ D _{h6}	E	∅ F _{k6}	FB	G
PS60	70	5.5	8	62	50	11.0	16	M5x8	40
PS90	100	6.5	10	90	80	15.0	22	M8x16	52
PS115	130	8.5	14	115	110	16.0	32	M12x25	68

Type	MF*	MG**	MT	L1 (1-stage)	L2 (2-stage)
PS60	≤ 14	16 - 35	16.5	59.8	94.8
		> 35 - 41	22.5		
PS90	≤ 19	20 - 40	20.0	69.5	113.0
		> 40 - 48	28.5		
PS115	≤ 24	22 - 50	24.0	90.2	143.4
		> 50 - 61	35.0		

* MF = maximum Diameter of motor shaft

** MG =length of motor shaft that specifies a thickness of motor flange MT



Angular Gears

Series RS60, RS90, RS115

The requirements between transmissible power and size of gear is defined by the use and required resolution. A gear can be used to reduce the required torque of the motor and to achieve a good inertia mismatch.

The RS gear boxes incorporate dual angular contact bearings, providing higher radial load capacities while maintaining high input speeds. The lifetime expectancy of newly designed needle bearings is significantly high.

An angular gear is often used if space is limited and a compact motor and a gear mounting is needed.

Maintenance

The RS series is lifetime lubricated.




Technical Data RS60							
Characteristics	Symbol	Unit	1-stage		2-stage		
Ratio	i		5	10	20	50	100
Nominal torque	T _{nom}	Nm	13	24	35	35	30
Maximum acceleration torque	T _{acc}	Nm	19	36	45	45	37
Emergency stop	T _{em}	Nm	40	72	80	80	60
Nominal speed	N _{nom}	min ⁻¹	3,200	3,200	3,700	4,200	4,200
Maximum speed	N _{max}	min ⁻¹	6,000				
Inertia	J	kgcm ²	0.22	0.19	0.17	0.15	0.15
Backlash		arcmin	<14		<12		
Efficiency at nominal torque	η	%	94				
Operating noise at 3000 min ⁻¹		dB(A)	<65				
Lifetime		h	>20,000				
Protection		IP	65				
Operating temperature		°C	- 20 to +90				
Weight	m	kg	2.0				

Technical Data RS90							
Characteristics	Symbol	Unit	1-stage		2-stage		
Ratio	i		5	10	20	50	100
Nominal torque	T _{nom}	Nm	55	80	88	88	86
Maximum acceleration torque	T _{acc}	Nm	83	120	123	123	112
Emergency stop	T _{em}	Nm	150	240	250	250	200
Nominal speed	N _{nom}	min ⁻¹	2,800	2,800	3,300	3,800	3,800
Maximum speed	N _{max}	min ⁻¹	5,300				
Inertia	J	kgcm ²	0.81	0.61	0.51	0.40	0.40
Backlash		arcmin	<12		<10		
Efficiency at nominal torque	η	%	94				
Operating noise at 3000 min ⁻¹		dB(A)	<68				
Lifetime		h	>20,000				
Protection		IP	65				
Operating temperature		°C	- 20 to +90				
Weight	m	kg	6.0				

Angular Gears

Series
RS60, RS90, RS115

Technical Data RS115							
Characteristics	Symbol	Unit	1-stage		2-stage		
Ratio	i		5	10	20	50	100
Nominal torque	T _{nom}	Nm	85	160	220	220	195
Maximum acceleration torque	T _{acc}	Nm	127	240	255	255	240
Emergency stop	T _{em}	Nm	270	480	510	510	430
Nominal speed	N _{nom}	min ⁻¹	2,400	2,400	2,900	3,400	3,400
Maximum speed	N _{max}	min ⁻¹	4,500				
Inertia	J	kgcm ²	2.50	1.90	1.40	1.10	1.10
Backlash		arcmin	<12		<10		
Efficiency at nominal torque	η	%	94				
Operating noise at 3000 min ⁻¹		dB(A)	<68				
Lifetime		h	>20,000				
Protection		IP	65				
Operating temperature		°C	- 20 to +90				
Weight	m	kg	11,0				

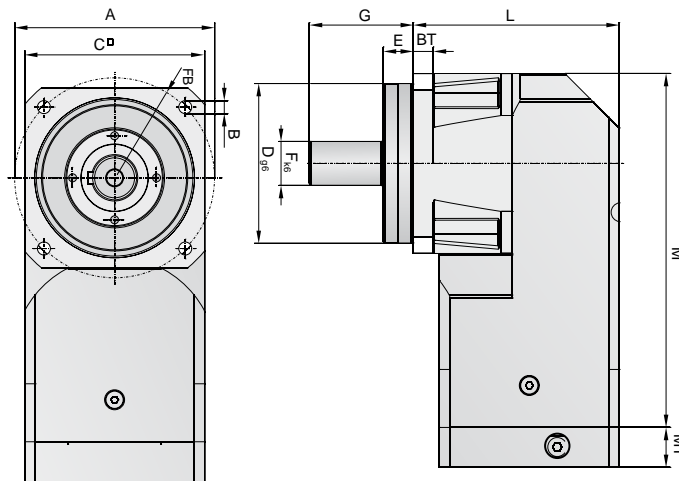

Dimension Table [mm]									
Type	∅ A	∅ B	BT	□C	∅ D _{h6}	E	∅ F _{k6}	FB	G
RS60	70	5.5	8	62	50	11.0	16	M5x8	40
RS90	100	6.5	10	90	80	15.0	22	M8x16	52
RS115	130	8.5	14	115	110	16.0	32	M12x25	68

Type	MF*	MG**	MT	H	L	M
RS60	≤ 14	16 - 35	16.5	47.0	76.8	124.7
		> 35 - 41	22.5			
RS90	≤ 19	20 - 40	20.0	58.0	103.0	177.0
		> 40 - 48	28.5			
RS115	≤ 24	22 - 50	24.0	74.0	132.0	211.0
		> 50 - 61	35.0			

* MF = maximum Diameter of motor shaft

** MG =length of motor shaft that specifies a thickness of motor flange MT



EasyDrive Packages



EasyDrive Controller

Microstepping & Servo Controller

Microstepping Controller

The microstepping controller has outstanding characteristics, for both slow and fast movements. Its step resolution from 400 to 51,200 steps per revolution is freely programmable and allows ideal adjustment to requirements regarding speed and response characteristics.

Technical Data			
Characteristics	Symbol	Unit	
Output voltage Motor	U_{bP}	VDC	48 - 80 (+5% to -15%)
Nominal output current	I_{nP}	A	5.6
Peak output current	I_{pP}	A	8
Motor inductance		mH	0.5 to 20
Output voltage Logic	U_{bL}	VDC	24 (+/- 12.5%)
Nominal current Logic	I_{nL}	mA	250
Resolution Motor (freely selectable)		Inc./rev	400 to 51,200
Digital inputs			5
Digital outputs			3
Com port			RS232
User Interface			EasyDrive
Certification			CE / UL (E194158)

Servo Controller

The servo controller should be selected for dynamic motion profiles, since it can deliver for the motor a peak current which is 3 times higher than the rated current. Optimising the closed loop parameters allows the system consistency to be adapted to the individual application's requirements and thus generate an excellent motion profile.

The EasyDrive user menu allows you to do commissioning quickly and easily without the need to go through user manuals.

Technical Data			
Characteristics	Symbol	Unit	
Output voltage Motor	U_{bP}	VDC	48 - 80 (+5% to -15%)
Nominal output current	I_{nP}	A	5
Peak output current	I_{pP}	A	15
Motor inductance		mH	0.5 to 10
Output voltage Logic	U_{bL}	VDC	24 (+/- 12.5%)
Nominal current Logic	I_{nL}	mA	250
Resolver		pulses/rev	4,096
Digital inputs			5
Digital outputs			3
Com port			RS232
User Interface			EasyDrive
Certification			CE / UL (E194158)






EasyDrive Controller

Connectors

Supply and Motor Connector Terminal Block X1		
Pin	Connection	
	Microstepper	Servo
1	Motor phase B-	Brake
2	Motor phase B+	Motor phase W
3	Motor phase A-	Motor phase V
4	Motor phase A+	Motor phase U
5	Motor ground	
6	Logic OVDC	
7	Logic +24VDC	
8	Ground	
9	Power OVDC	
10	Power +48 bis +80VDC	

RS232 Com-port D-SUB 9-pole X3	
Pin	Connection
1	-
2	Drive clear (low activ)
3	Ground
4	Rx
5	Tx
6	-
7	Tx (D loop)
8	-
9	+ 5V Supply



Resolver Feedback D-SUB 15-pole X2	
Pin	Connection
1	-
2	-
3	Ground
4	REF.res +
5	+ 5V supply
6	Motor -
7	- Sin
8	+ Sin
9	-
10	Motor +
11	- Cos
12	+ Cos
13	-
14	-
15	REF.res -

Digitale Inputs and Outputs D-SUB 15-pole X5	
Pin	Connection
1	0 V
2	0 V
3	0 V
4	Output 2
5	Output 1
6	Input 5
7	Input 4
8	Input 3 (Homing)
9	Input 2
10	Input 1 (Start / Stop)
11	+ 24 V
12	+ 24 V
13	+ 24 V
14	Output 3
15	Analog monitor



EasyDrive Stepper Motor

Series
SY563T, SY873T


Stepper Motor

The 2-phase hybrid stepper motors were designed to suit most industrial applications that require special rigidity and reliability.

The typical characteristic torque curve shows the maximum torque for the stepper motor, that must not be exceeded. For industrial applications motors usually are sized within the secure torque curve.


Technical Data				
Characteristics	Symbol	Unit	SY563T	SY873T
Holding torque	M_h	Nm	1.2	5.4
Nominal speed	n_n	min^{-1}	900	900
Nominal torque	M_n	Nm	0.8	2.5
Critical speed	n_l	min^{-1}	1,800	1,800
Torque at critical speed	M_l	Nm	0.5	1.2
Current per phase (parallel)	I_{ph}	A	6.5	8.4
Inductivity per phase		mH	1.2	1.7
Inertia	J	kgcm^2	0.38	1.95
Weight	m	kg	1.4	3.7

Torque Curve SY563T

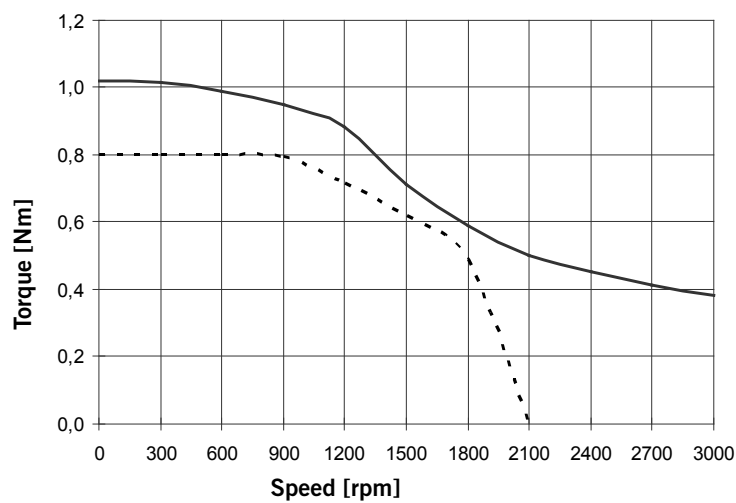

— characteristic torque curve
- - - secure torque curve


Torque Curve SY873T

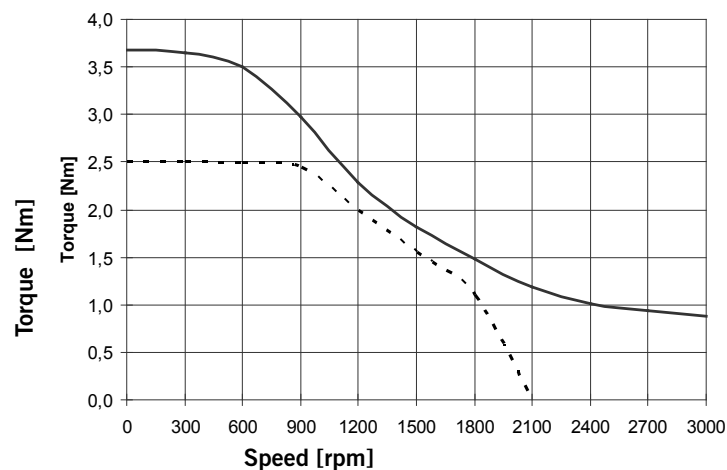

EasyDrive Stepper Motor

Series
SY563T, SY873T

Dimensions

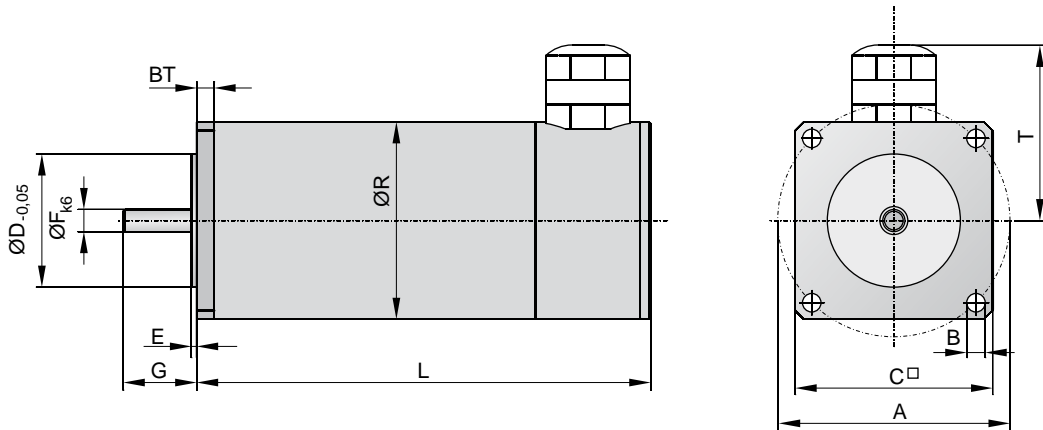

Dimension Table [mm]										
Type	$\varnothing A$	$\varnothing B$	BT	C	$\varnothing D$	E	$\varnothing F$	G	L	R
SY563T	66.5	5.3	5	56.5	38.1	2.5	6.35	21.0	130.0	56.5
SY873T	99.0	6.5	6	86.0	73.0	3.0	9.52	31.5	149.5	86.0



EasyDrive Servo Motor

Series
SMB60, SMB82


Servo Motor

The dynamic, brushless SMB servomotors show excellent power density. With their high quality Neodym magnets they give outstanding values for torque and dynamics while they have a very compact design.

Technical Data				
Characteristics	Symbol	Unit	SMB60-30	SMB82-25
Motor				
Stand still torque	M_{ss}	Nm	1.4	3.0
Stand still current	I_{ss}	A	1.0	1.2
Nominal speed	n_n	min ⁻¹	3,000	2,500
Nominal torque	M_n	Nm	1.0	1.5
Nominal current	I_n	A	0.9	1.1
Peak torque	M_p	N _m	3.0	4.5
Peak current	I_p	A	2.7	3.3
Torque constant	K	Nm/A	0.90	0.73
Rotor inertia	J	kgcm ²	0.3	1.4
Weight	m	kg	1.5	3.5
Holding brake				
Holding torque	M_{BR}	N _m	2.2	5.0
Supply voltage	U_{BR}	VDC	24.0	24.0
Supply current	I_{BR}	A	0.34	0.50
Inertia	J_{BR}	kgcm ²	0.13	0.43
Weight	m_{BR}	kg	0.3	0.7


The typical torque curve of a servo motor shown in the graphic beside. Shortly the nominal torque curve can be exceeded to at maximum the peak torque curve. The RMS torque of the application must not exceed the nominal torque value of the motor.

Torque curve SMB60

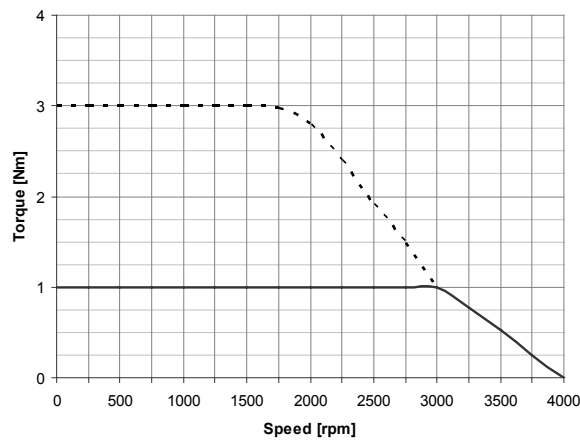

— Nominal Torque Curve
- - - Peak Torque Curve


Torque curve SMB82

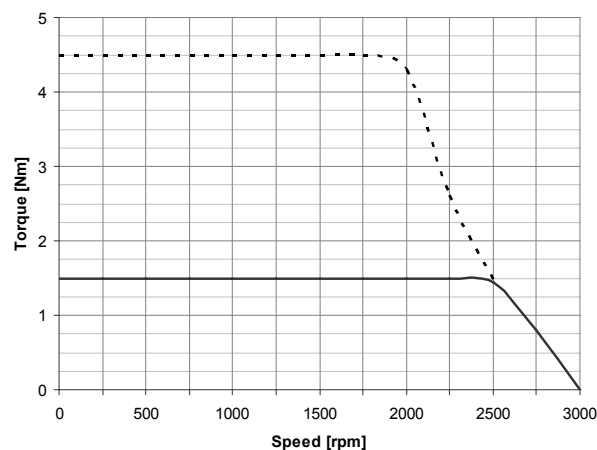

EasyDrive Servo Motor

Series
SMB60, SMB82

Dimensions

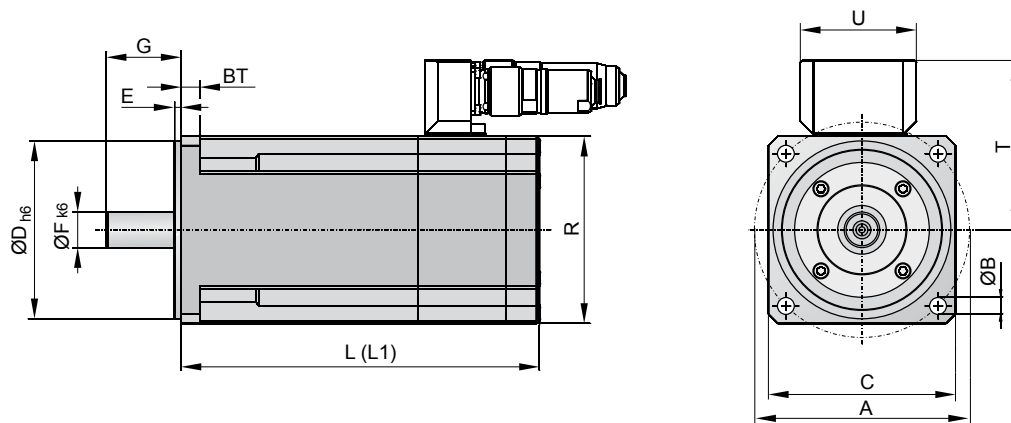

Dimension Table [mm]								
Type	$\varnothing A$	$\varnothing B$	BT	$\square C$	$\varnothing D_{h6}$	E	$\varnothing F_{k6}$	G
SMx60	63	5.5	7	60	40	2.5	11	23
SMx82	100	6.5	10	82	80	3.5	14	30

Type	L (without brake)	L1 (with brake)	R	T	U
SMx60	129.5	161.0	60	70	62
SMx82	163.5	206.5	82	81	62



EasyDrive Stepper packages

Type of drive		Coupling housing	Motor coupling	Motor flange	
OSP-E25B		20606FIL	10802FIL	12020FIL	
				18284FIL	
OSP-E32B		20607FIL	12164FIL	16083FIL	
			10842FIL	12022FIL	
OSP-E50B		20608FIL	10845FIL	16072FIL	
OSP-E25S*		20137FIL	12071FIL	12058FIL	
				16004FIL	
OSP-E32S*		20138FIL	12164FIL	12163FIL	
				10842FIL	
OSP-E50S*		20139FIL	12079FIL	16072FIL	

EasyDrive Servo packages

Type of drive		Coupling housing	Motor coupling	Motor flange		
OSP-E25B		20606FIL	10803FIL	16060FIL		
OSP-E32B			20607FIL	12074FIL		16021FIL
				10801FIL		15293FIL
OSP-E50B		20608FIL	10804FIL	12024FIL		
Type of drive		Coupling housing	Motor coupling	Motor flange		
OSP-E25S*		20137FIL	12070FIL	16068FIL		
OSP-E32S*			20138FIL	12074FIL		18315FIL
			10801FIL	12134FIL		
OSP-E50S*		20139FIL	12075FIL	12065FIL		

* OSP-E, ..SB, ..ST, ..SBR, .. STR

** EasyDrive packages consisting of controller, motor and 5m cable (motor/feedback)


Accessoires

Description	Comment	Order No.
Power Supply	XLPSU 80VDC@3A / 24VDC@0,25A	18356
I/O Connection Cable	D-SUB 15-pole flying leads, 5m	18357
Communication Cable	RS232 COM cable, 2m	18358











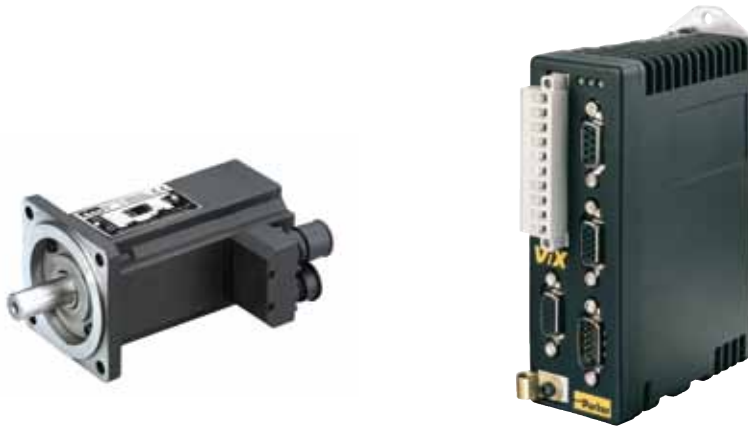



	EasyDrive packages**
	18300FIL (EasyDrive Stepper SY563T)
	18301FIL (EasyDrive Stepper SY873T)
	18300FIL (EasyDrive Stepper SY563T)
	18301FIL (EasyDrive Stepper SY873T)
	18301FIL (EasyDrive Stepper SY873T)
	18300FIL (EasyDrive Stepper SY563T)
	18301FIL (EasyDrive Stepper SY873T)
	18300FIL (EasyDrive Stepper SY563T)
	18301FIL (EasyDrive Stepper SY873T)
	18301FIL (EasyDrive Stepper SY873T)



	EasyDrive packages**
	18302FIL (EasyDrive Servo SMB60)
	18302FIL (EasyDrive Servo SMB60)
	18303FIL (EasyDrive Servo SMB82)
	18303FIL (EasyDrive Servo SMB82)
	EasyDrive packages
	18302FIL (EasyDrive Servo SMB60)
	18302FIL (EasyDrive Servo SMB60)
	18303FIL (EasyDrive Servo SMB82)
	18303FIL (EasyDrive Servo SMB82)



Accessories for Electric Actuators

Description	Illustration		Page
Motor Mountings		Coupling housing, motor flange, motor coupling	133 ff
		Belt Gear	
End Cap Mountings			141 ff
		Flange C-E	
Profile Mountings		Mid section support Guide Mounting	147 ff
		Adapter profiles	
		Trunnion and Pivot Mounting	
Compensations		Clevis Mounting	155 ff
		Inversion Mounting	
		Piston Rod Eye, Piston Rod Clevis, Piston Rod Compensating Coupling	
Guide Mountings		End Cap mounting Profile Mounting	161 ff
Magnetic Switches			165 ff
Displacement Measuring System SFI-plus			171 ff
Cable Cover			175 ff

Motor Mounting



Content

Description	Page
Coupling housing, Motor flanges (OSP-E..BHD)	134
Coupling housing, Motor flanges, Motor coupling (OSP-E..BV)	135
Coupling housing, Motor flanges, Motor coupling (OSP-E..B)	136
Coupling housing, Motor flanges, Motor coupling (OSP-E ..SB, ..ST, ..SBR, ..STR)	137
Motor flanges for freely selectable mounting dimensions (OSP-E..B, ..SB, ..ST, ..SBR, ..STR)	138
Belt Gear for freely selectable mounting dimensions (OSP-E..SB, ..ST, ..SBR, ..STR)	140

Coupling Housing Motor Flange

Size 20, 25, 32, 50



- **OSP-E..BHD**
Belt Actuator with integrated guide

Via the coupling housing the gear or the motor can be fitted directly to the actuator and the drive shafts by means of a motor flange.



The motor flange matches the above mentioned coupling housing and has to be reworked to match the respective type of motor.


Motor flanges for the available range of gears, servo and stepper motors are included in the respective data sheet, including technical data and dimensions. Please refer to the respective catalogues.

Coupling Housing (for gear or motor mounting)						
Series	$\varnothing A$	L	M	N	$\varnothing O$	Order No.
OSP-E20BHD	65.8	19	60	60	48	16215
OSP-E20BHD*	65.8	79	60	60	48	16269
OSP-E25BHD	82.0	22	76	76	68	12300
OSP-E32BHD	106.0	30	98	98	88	12301
OSP-E50BHD	144.0	41	130	130	118	12302

* Coupling housing for motor and gear mounting with a motor coupling

Motor Flange (semi-finished)										
Series	$\square C$	CB	$\varnothing L$	$\varnothing N$	$\varnothing O$	P	R	S	$\varnothing RS$	Order No.
OSP-E20BHD	75	10	25	6.6	11	3.2	46.5	46.50	65.8	16216
OSP-E25BHD	90	14	36	9.0	15	5.5	57.98	57.98	82.0	12308
OSP-E32BHD	100	14	55	11.0	18	3.5	74.95	74.95	106.0	12309
OSP-E50BHD	125	18	77	13.5	20	5.5	101.82	101.82	144.0	12310


Motor flanges (finished)		
Series	Comment	Order No.
OSP-E20BHD	for PV40-TA / LP050	16224
OSP-E20BHD	for PV60-TA / LP070 (with gear mounting 15166)	16273
OSP-E20BHD	for PS60 (with gear mounting 15166)	18283
OSP-E25BHD	for PV60-TA / LP070	12311
OSP-E25BHD	for PS60	18413
OSP-E32BHD	for PV90-TA / LP090	12312
OSP-E32BHD	for PS90	18419
OSP-E50BHD	for PV115-TA / LP120	12313
OSP-E50BHD	for PS115	18422
OSP-E50BHD	for PV115-TA / LP120	12313

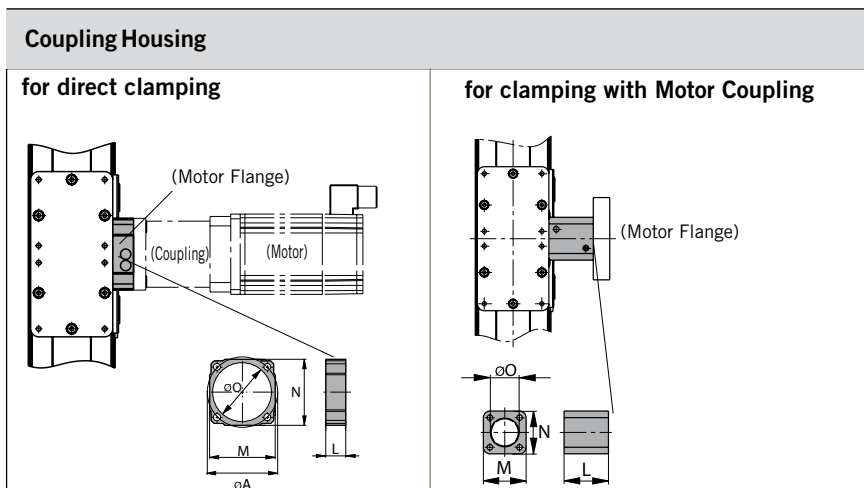

Series	ø A	L	M	N	ø O	Order No.
OSP-E20BV	65.8	19	60	60	48	16215
OSP-E20BV*	65.8	79	60	60	48	16269
OSP-E25BV	82.0	22	76	76	68	12300
OSP-E25BV*	65.8	84	87	87	48	20139


* Coupling housing for motor and gear mounting with a motor coupling

Universal Motor Coupling

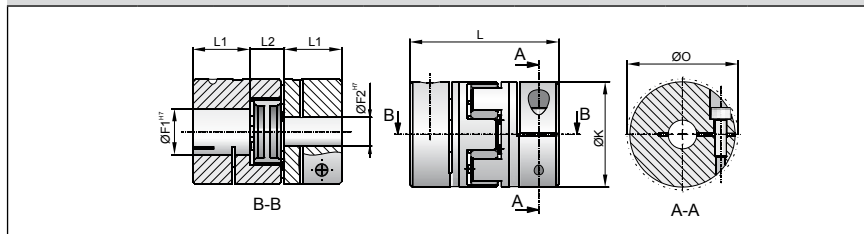

Series	ø F ₁ H7	ø F ₂ H7	ø F H7	ø K	L	L ₁	L ₂	ø O	Order No.
OSP-E20BV	12	9.5	8 - 24	40	66	25	16	46.0	16268
OSP-E25BV	16	9.5	8 - 24	40	66	25	16	46.0	10845

Motor Flange

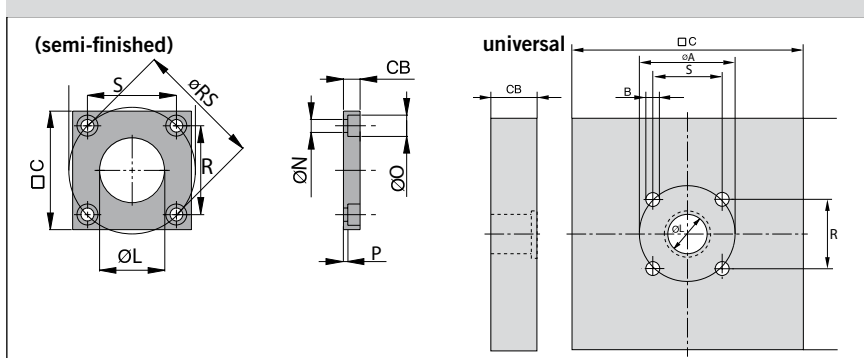

Series	□ C	CB	ø L	ø N	ø O	P	R	S	ø RS	Order No.
OSP-E20BV	75	10	25	6.6	11	3.2	46.5	46.5	65.8	16216
OSP-E20BV*	120	15	25	6.6	11	3.0	46.5	46.5	65.8	16267
OSP-E25BV	90	14	36	9.0	15	5.5	58.0	58.0	82.0	12308
OSP-E25BV*	120	15	35	6.6	11	3.0	46.0	46.0	65.0	12069

Motor flanges (finished)

Series	Comment	Order No.
OSP-E20BV	for PV40-TA / LP050	16224
OSP-E20BV	for PV60-TA / LP070 (with motor coupling 15166)	16273
OSP-E20BV	for PS60 (with motor coupling 15166)	18283
OSP-E25BV	for PV60-TA / LP070	12311
OSP-E25BV	for PS60	18413

Coupling Housing

Motor Flange

Motor Coupling



Size 20, 25



- **OSP-E..BV**
Vertical belt actuator with integrated ball bearing guide

The coupling housing with suitable motor flange allows proper connection between the drive shaft of the actuator and the gear shaft or motor shaft. The gear or motor can either be fitted to the actuator directly or indirectly. If a Parker Origa gear is used, direct clamping of the gear shaft into to the drive shaft with clamping hub. As an alternative the gear or motor can be fitted to the actuator via a motor coupling.

¹⁾ **Hint:**
when selecting the type of motor mounting please observe the respective drive shaft versions in accordance with the ordering code of the actuator (page 36).

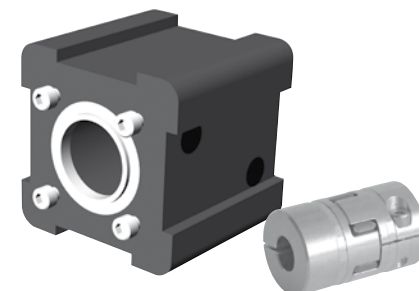

Coupling Housing Motor Flange Motor Coupling

Size 25, 32, 50




- **OSP-E..B**
Belt actuator with internal plain bearing guide

The coupling housing with suitable motor flange allows easy and inherently stable connection of the gear or the motor to the actuator.


Hint:

Let us know the mounting dimensions of your motor. Upon request we will be pleased to check and manufacture a motor flange that will come up to your individual needs.

(Also see "motor flange for freely selectable mounting dimensions" page 126 ff)

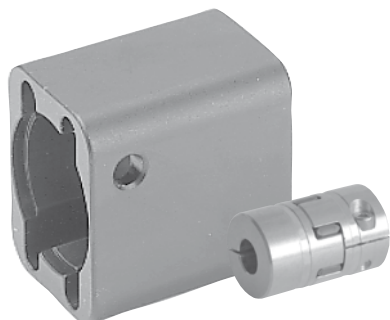


Coupling Housing (for gear or motor mounting)

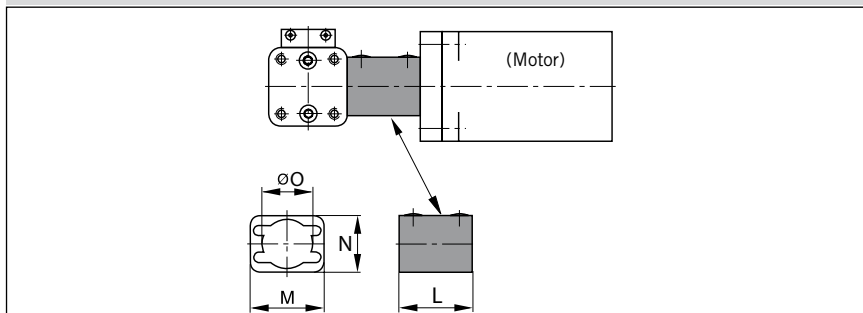


Series	Ø A	L	M	N	Ø O	Order No.
OSP-E25B	33,5	47	40	30	25	20606
OSP-E32B	42,0	49	49	38	33	20607
OSP-E50B	59,4	76	65	54	48	20608

Motor coupling

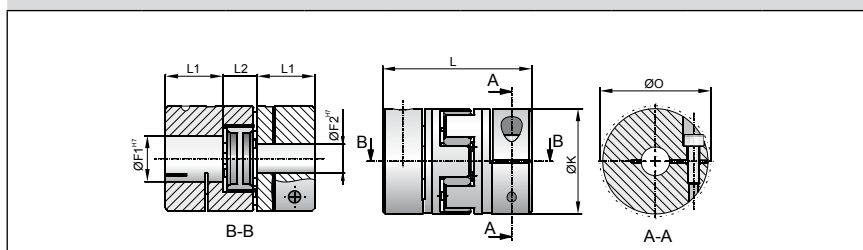

Series	Ø F ₁ ^{H7}	Ø F ₂ ^{H7}	Ø F ^{H7}	Ø K	L	L1	L2	Ø O	Order No.
OSP-E25B	10	4.0	4 - 11	20	30	10	10	23.4	12073
OSP-E32B	10	6.0	5 - 16	30	35	11	13	32.2	15197
OSP-E50B	16	9.5	8 - 24	40	66	25	16	46.0	10845

Universal Motor Flange

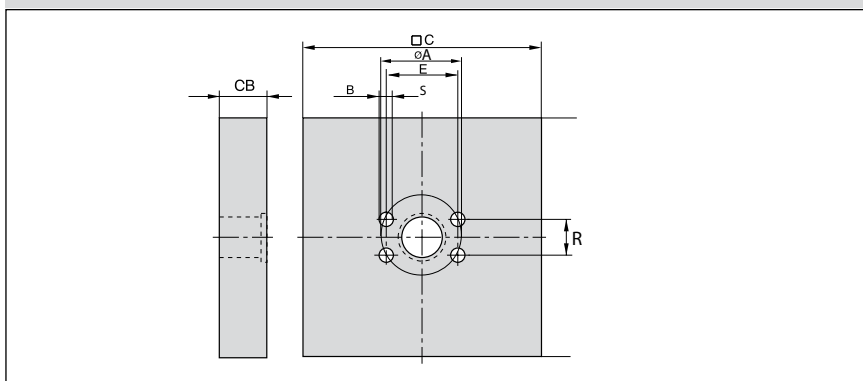


Series	□ C	CB	Ø L	Ø N	Ø O	P	R	S	Ø RS	Order No.
OSP-E25B	100	20	16	5.5	10	3.0	30.0	15.0	33.5	12050
OSP-E32B	100	20	22	6.6	11	4.0	38.0	18.0	42.0	12053
OSP-E50B	120	15	35	9.0	15	3.0	50.0	32.0	59.4	12056

Motorflange (finished)


Series	Comment	Order No.
OSP-E25B	for PV40-TA / LP050 (with motor coupling 12080)	16076
OSP-E32B	for PV40-TA / LP050 (with motor coupling 10841)	16090
OSP-E32B	for PV60-TA / LP070 (with motor coupling 12980)	15930
OSP-E32B	for PS60 (with motor coupling 12980)	18272
OSP-E50B	for PV60-TA / LP070 (with motor coupling 12981)	16057
OSP-E50B	for PS60 (with motor coupling 12981)	18277

Coupling Housing (for motor)

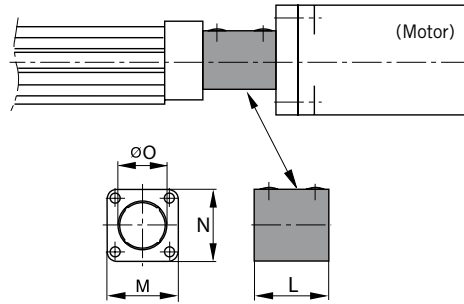


Series	$\varnothing A$	L	M	N	$\varnothing O$	Order No.
OSP-E25S*	38,2	38	41	41	25	20137
OSP-E32S*	50,9	54	52	52	33	20138
OSP-E50S*	65,0	84	87	87	48	20139

Motor Coupling

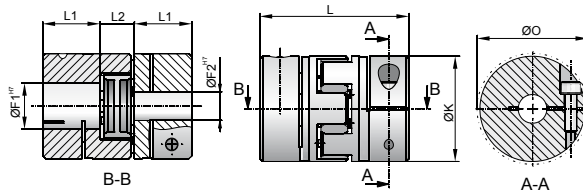

Series	$\varnothing F_1^{H7}$	$\varnothing F_2^{H7}$	$\varnothing F^{H7}$	$\varnothing K$	L	L1	L2	$\varnothing O$	Order No.
OSP-E25S*	6	6.0	4 - 11	20	30	10	10	23.4	12073
OSP-E32S*	10	6.0	5 - 16	30	35	11	13	32.2	15197
OSP-E50S*	15	9.5	8 - 24	40	66	25	16	46.0	12079

Universal Motor Flange and Motor Coupling

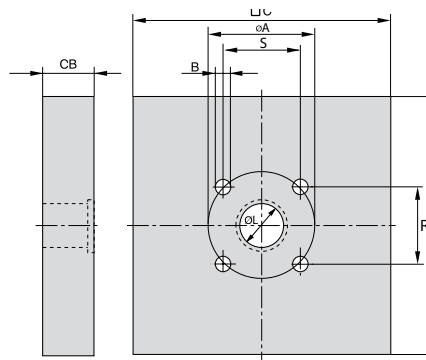

Series	$\square C$	CB	$\varnothing L$	$\varnothing N$	$\varnothing O$	P	R	S	$\varnothing RS$	Order No.
OSP-E25S*	100	20	16	5.5	10	3.0	27.0	27.0	38.2	12060
OSP-E32S*	100	20	22	6.6	11	4.0	36.0	36.0	50.9	12064
OSP-E50S*	120	15	35	6.6	11	3.0	46.0	46.0	65.0	12069

Motor flanges (finished)

Series	Comment	Order No.
OSP-E25S*	for PV40-TA / LP050 (with motor coupling 12072)	16058
OSP-E32S*	for PV40-TA / LP050 (with motor coupling 10841)	16070
OSP-E32S*	for PV60-TA / LP070 (with motor coupling 12980)	15803
OSP-E32S*	for PS60 (with motor coupling 12980)	18281
OSP-E50S*	for PV60-TA / LP070 (with motor coupling 15227)	15526
OSP-E50S*	for PS60 (with motor coupling 15227)	18283

Coupling Housing Motor Flange Motor Coupling

Size 25, 32, 50




- OSP-E..SB, ..ST
Screw actuator with internal plain bearing guide
- OSP-E..SBR, ..STR
Screw actuator with internal plain bearing guide and piston rod

The coupling housing with suitable motor flange allows easy and inherently stable connection of the gear or the motor to the actuator.

Hint:

Let us know the mounting dimensions of your motor. Upon request we will be pleased to check and manufacture a motor flange that will come up to your individual needs.

(Also see "configurable motor flange" page 128)

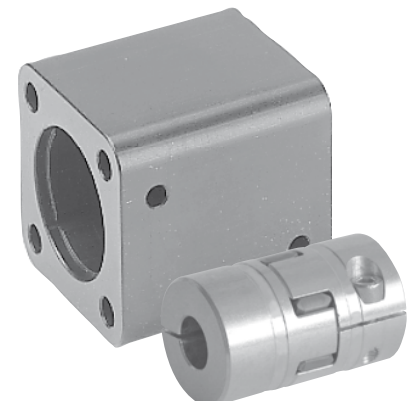

Motor Flange

for freely selectable mounting dimensions

Size 25, 32, 50



- **OSP-E..B**
Ball actuator with internal plain bearing guide
- **OSP-E..SB, .. ST**
Screw actuator with internal plain bearing guide
- **OSP-E..SBR, STR**
Screw actuator with internal plain bearing guide and piston rod


The motor flange for motors with freely selectable mounting dimensions offers flexible possibilities to connect most different types of motors to the electric actuators OSP-E.

The drive shafts of actuator and motor are connected with a motor coupling in the coupling housing and the motor flange is centred.

Hint

Please check the following data for the connection of the motor to the freely selectable motor flange and state when ordering:

1. mounting angle W of the motor
2. bore hole version B as thread M or counterbore S
3. pitch circle diameter A as a function of M or S
4. Diameter of centring spigot D
5. Length of motor shaft G

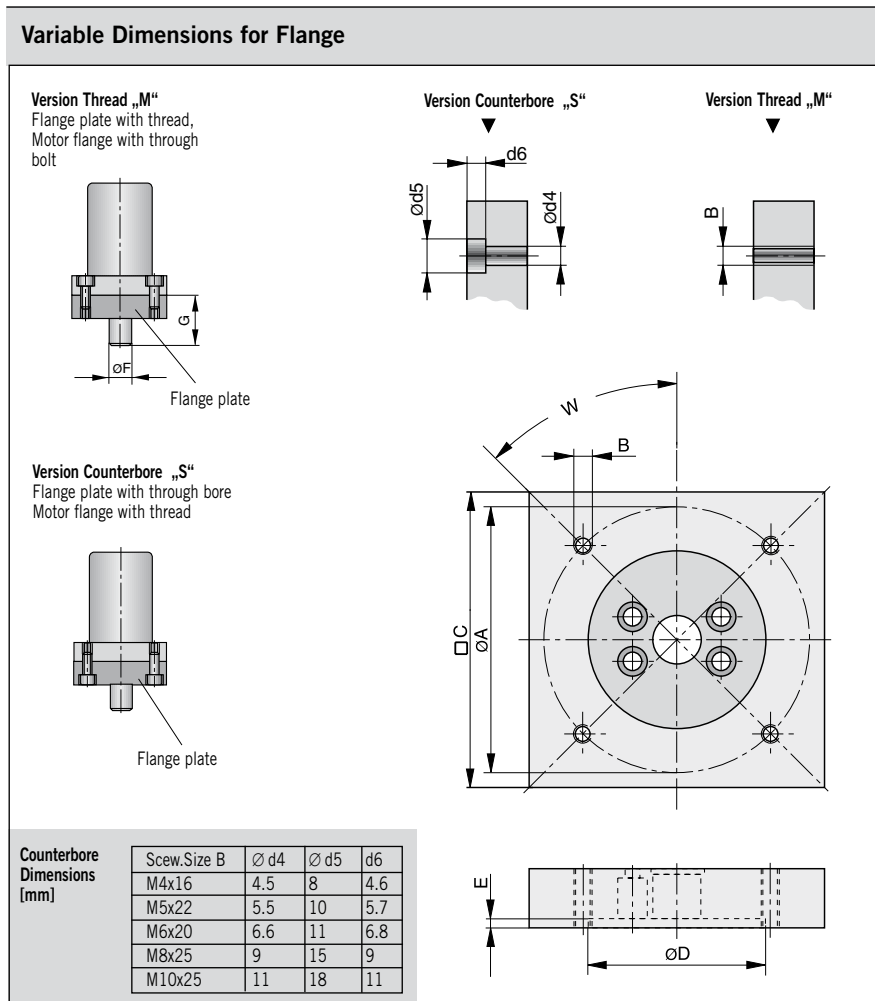

Dimension table of the variable dimensions [mm] – Version for Belt drive

W		45 °			90 °		
Size		25	32	50	25	32	50
A	min. Vers. S	48 + Ød5	60 + Ød5	80 + Ød5	40 + Ød5	49 + Ød5	65 + Ød5
	max. Vers. S	135 - Ød5	135 - Ød5	160 - Ød5	100 - Ød5	100 - Ød5	120 - Ød5
	min. Vers. M	45 + B	55 + B	75 + B	40 + B	48 + B	50 + B
	max. Vers. M	135 - B	135 - B	160 - B	96 - B	96 - B	116 - B
B	max.	M10			M10		
D	min.	20	30	40	20	30	40
	max.	98	98	118	85	85	105
G	min.	18	21	32	18	21	32
	max.	33	35	45	33	35	45
C		100	100	120	100	100	120

Dimension table of the variable dimensions [mm] – Version for Screw drive

W		45 °			90 °		
Size		25	32	50	25	32	50
A	min. Vers. S	58 + Ød5	74 + Ød5	123 + Ød5	41 + Ød5	52 + Ød5	87 + Ød5
	max. Vers. S	135 - Ød5	135 - Ød5	160 - Ød5	100 - Ød5	100 - Ød5	120 - Ød5
	min. Vers. M	52 + B	68 + B	82 + B	30 + B	40 + B	50 + B
	max. Vers. M	135 - B	135 - B	160 - B	96 - B	96 - B	116 - B
B	max.	M10			M10		
D	min.	20	30	40	20	30	40
	max.	98	98	118	85	85	105
G	min.	18	21	32	18	21	32
	max.	33	35	45	33	35	45
C		100	100	120	100	100	120

Legend

- W [°] = Angle of fastening boreholes
- A [mm] = Pitch circle diameter
- B = Thread size of fastening screw
(version: M = thread, S = counterbore)
- D [mm] = Diameter of centring spigot
- E [mm] = Depth of centring spigot
- F [mm] = Diameter of motor shaft
- G [mm] = Length of motor shaft

Order Instructions

Description	Ident-Nr.
Article is configurable customized	18184

Belt Gear

for freely selectable mounting dimensions

Size 25, 32, 50



• Series OSP-E..SB, ..ST, ..SBR, ..STR
Actuator with Screw

The belt gear with its freely selectable mounting dimensions offers the possibility to fit most different types of motors to the actuator parallel to the motor axis.


After the flange dimensions of the motor had been checked, the mounting side of the motor will be prepared for the individual demands of the customer.

When ordering please observe the version of the drive shaft of the actuator OSP-E with spindle. This version can either be ordered with plain shaft or plain shaft with keyway (Option). (If the version keyway is selected, the delivery period may be elongated.)

Ausführungen der Antriebswelle OSP-E with Screw	
Order no.	Drive shaft
OSP-E..*... ..0-.....	Plain
OSP-E..*... ..3-.....	Key way
OSP-E..*... ..4-.....	Key way, long
* 1=SB, 2=ST, 3=STR, 4=SBR	


Max. allowed Moments M [Nm] for Belt Gear		
Size	Transmission ratio	
	1:1	2:1
25	5	5
32	10	10
50	20	20

Beware of the max. allowed moments of the corresponding actuator.

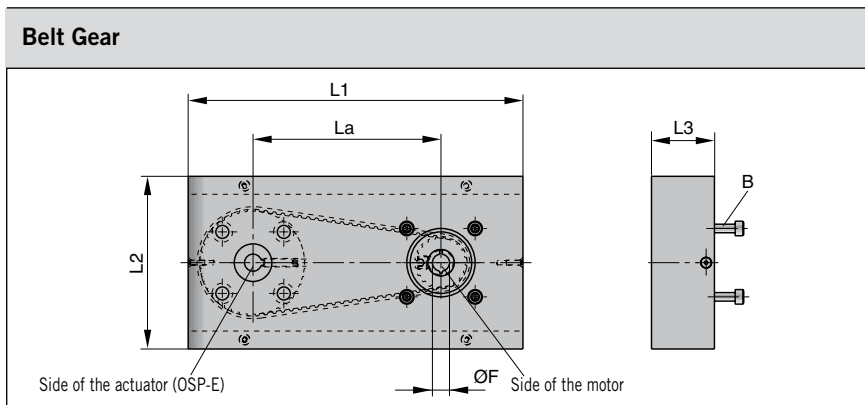

Dimension Table [mm] and Order Instructions								
Series	L1	L2	L3	La		B	Ø F*	Order No.
				1:1	2:1			
OSP-E25	186	101	30	110	109.3	M4 – M10	6, 7, 8, 9, 10, 11	15576
OSP-E32	196	101	37	110	111.4		8, 9, 10, 11, 12, 14	15576
OSP-E50	234	101	50	135	133.7		12, 14, 16, 19	15576

* other diameters on request

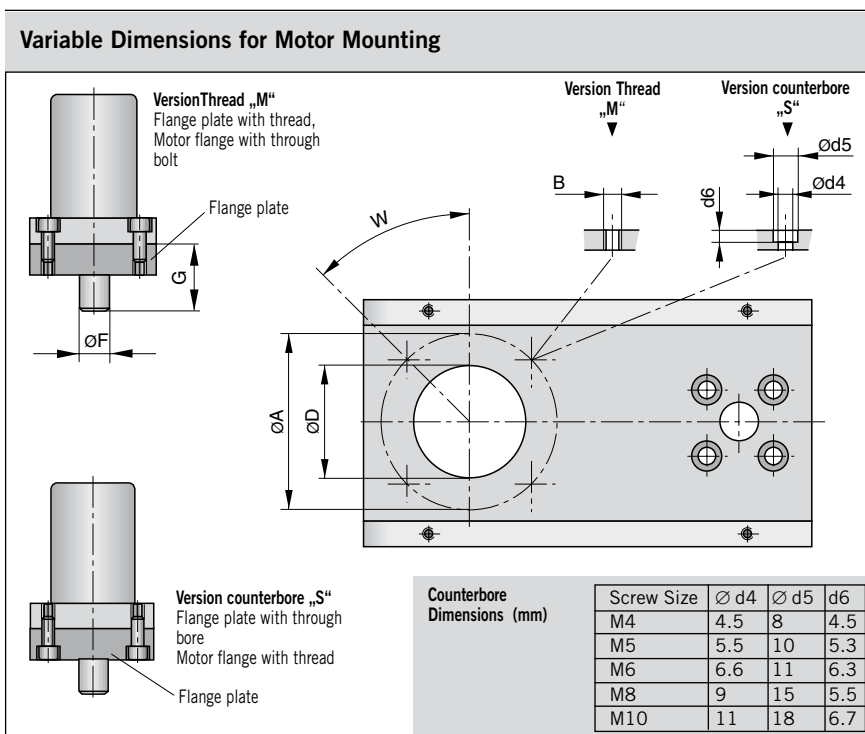

Dimension table of the variable dimensions [mm]						
W	45 °			90 °		
	25	32	50	25	32	50
Size						
A min.	30			30		
max. Vers. S	110 - Ød5			70 - Ød5	70 - Ød5	80 - Ød5
max. Vers. M	110 - Ød4			70 - Ød4	70 - Ød4	80 - Ød4
B max.	M 8			M 8		
D min.	20			20		
max.	80	80	100	60	60	70
G min.	16	20	30	16	20	30
max.	23	30	40	23	30	40
ØF [mm]	6, 7, 8, 9, 10, 11	8, 9, 10, 11, 12, 14	12, 14, 16, 19	6, 7, 8, 9, 10, 11	8, 9, 10, 11, 12, 14	12, 14, 16, 19

End Cap Mounting



Contents

Description	Page
End Cap Mounting (OSP-E..BHD)	142
End Cap Mounting (OSP-E..SBR, ..STR)	144
Flange Mounting C-E (OSP-E..SBR, ..STR)	146

End Cap Mounting

Size 20, 25, 32, 50




- Series OSP-E..BHD
For Actuator with Belt
and integrated Guides

On the end-face of each end cap there are eight threaded holes for mounting the actuator.


Material:
Anodized aluminium.

The mountings are supplied in pairs.

Series OSP-E20BHD to E32BHD: Type CN-20, CN-25, CN-32

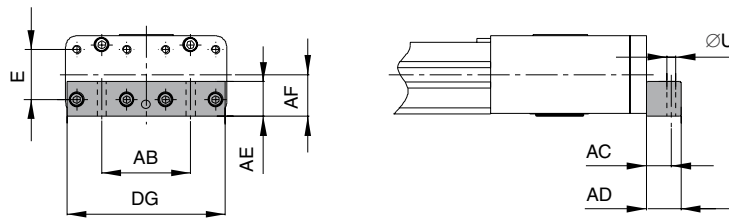

Series OSP-E50BHD: Type C50

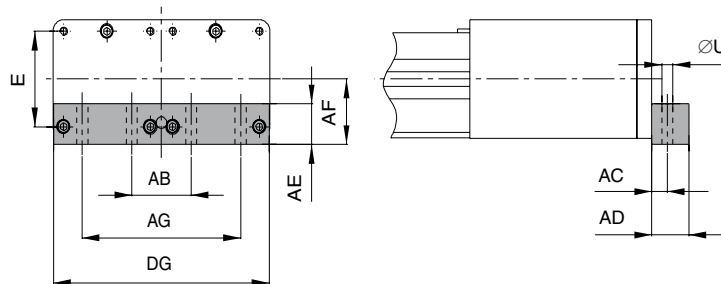


Dimension Table [mm] and Order Instructions

Series	Type	E	ØU	AB	AC	AD	AE	AF	AG	DG	Order No. *)
OSP-E20BHD	CN-20	27	6.6	40	10.0	20	20	22	-	74	16213
OSP-E25BHD	CN-25	27	6.6	52	16.0	25	25	22	-	91	12266
OSP-E32BHD	CN-32	36	9.0	64	18.0	25	25	30	-	114	12267
OSP-E50BHD	CN-50	70	9.0	48	12.5	30	30	48	128	174	12268


*) = Pair



**Series OSP-E20BHD to E32BHD:
Type CO-20, CO-25, CO-32**

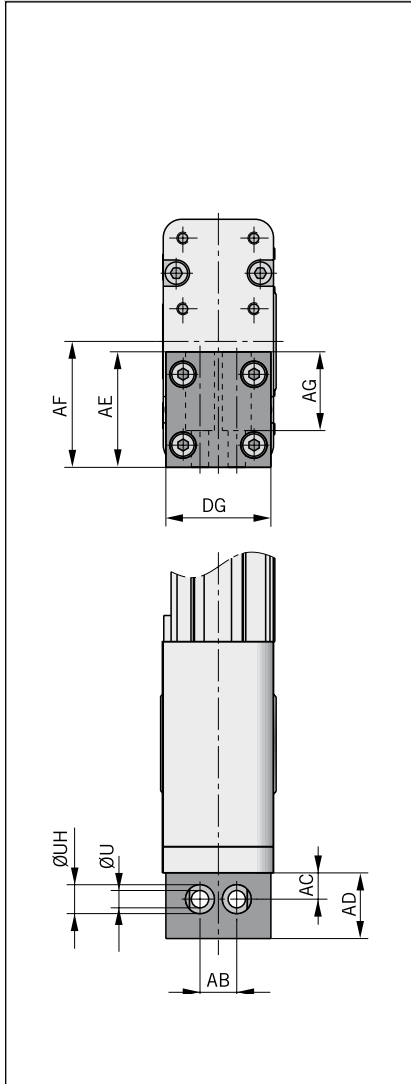

**Series OSP-E50BHD:
Type CO-50**

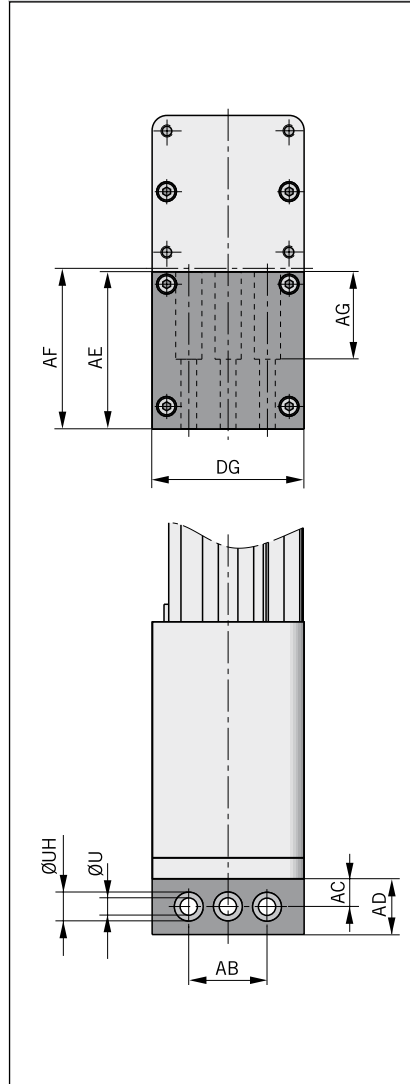

End Cap Mounting

Size 20, 25, 32, 50



- Series OSP-E..BHD Actuator with Belt and Integrated Guide

On the end-face of each end cap there are eight threaded holes each for mounting the actuator.

Material:
Anodized aluminium.

The mountings are supplied in pairs.

Dimension Table [mm] and Order Instructions

Series	Type	ØU	AB	AC	AD	AE	AF	AG	ØUH	DG	Order No. *)
OSP-E20BHD	CO-20	6.6	18	15	22	42	45	39	11	40	16241
OSP-E25BHD	CO-25	6.6	14	10	25	44	48	30	11	40	16245
OSP-E32BHD	CO-32	9.0	19	12	28	60	62	42	15	56	16246
OSP-E50BHD	CO-50	9.0	45	16	32	90	92	50	15	87	16247

*)= Pair



End Cap Mounting

Size 25, 32, 50




- Series OSP-E...B
Belt actuator with internal plain bearing guide
- Series OSP-E...SB, .. ST
Screw actuator with internal plain bearing guide

On the end-face of each end cap there are four threaded holes for mounting the actuator.
The hole layout is square, so that the mounting can be fitted to the bottom, top or either side.


Material:
Series OSP-25 to 32:
Galvanised steel.
Series OSP-50:
Anodized aluminium.

The mountings are supplied as pairs

Series OSP-E25 to E32: Type A1

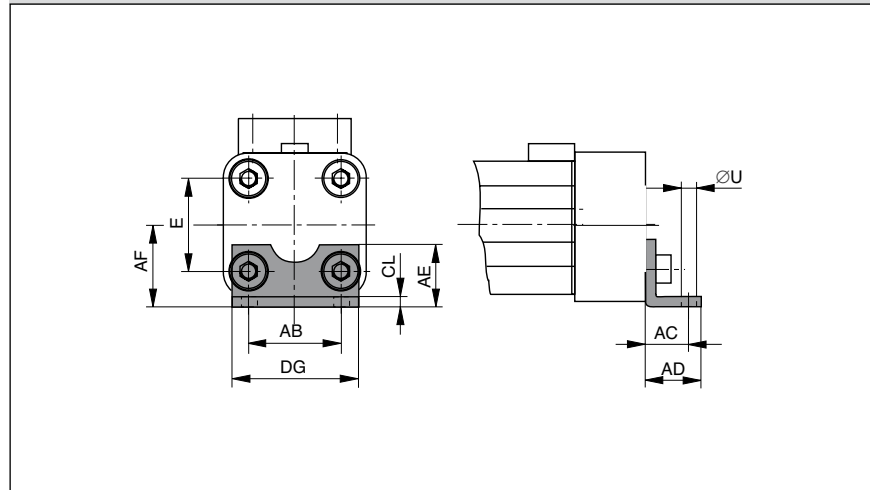

Series OSP-E50: Type C1

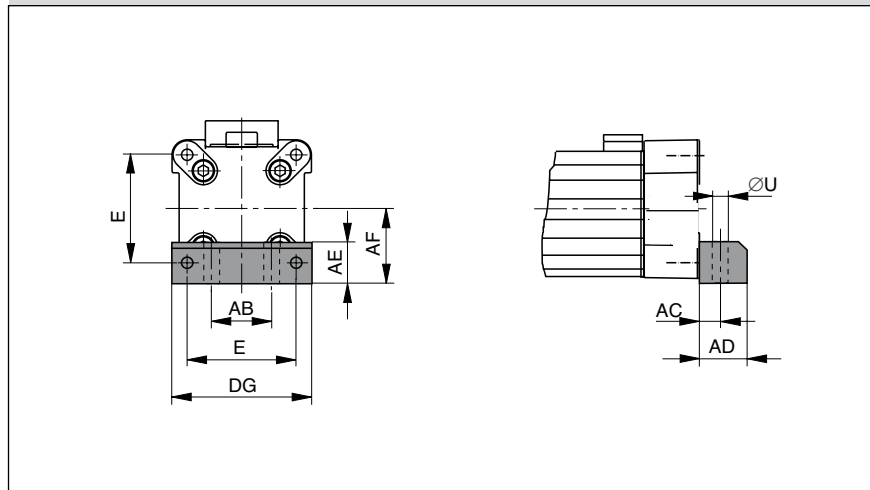

Dimension Table [mm] and Order Instruction

Series	E	ØU	AB	AC	AD	AE	AF	CL	DG	Order No. *)	
										Typ A1	Typ C1
OSP-E25	27	5.8	27	16	22	18	22	2.5	39	2010	–
OSP-E32	36	6.6	36	18	26	20	30	3.0	50	3010	–
OSP-E50	70	9.0	40	12.5	24	30	48	–	86	–	5010

*) = Pair


Important:

With the OSP-E Screw series, the end cap mounting can only be used at the end opposite to the drive shaft.


We recommend the application of two mid section supports (page 136 ff) at the drive shaft end of the actuator.



Series OSP-E25SBR, 25STR to E32SBR, 32STR: Type A1SR

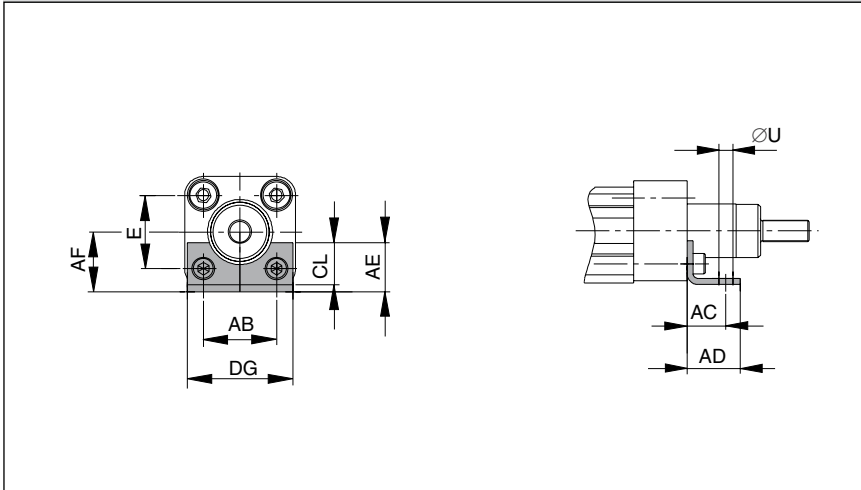

Series OSP-E50SBR, 50STR: Type C1SR

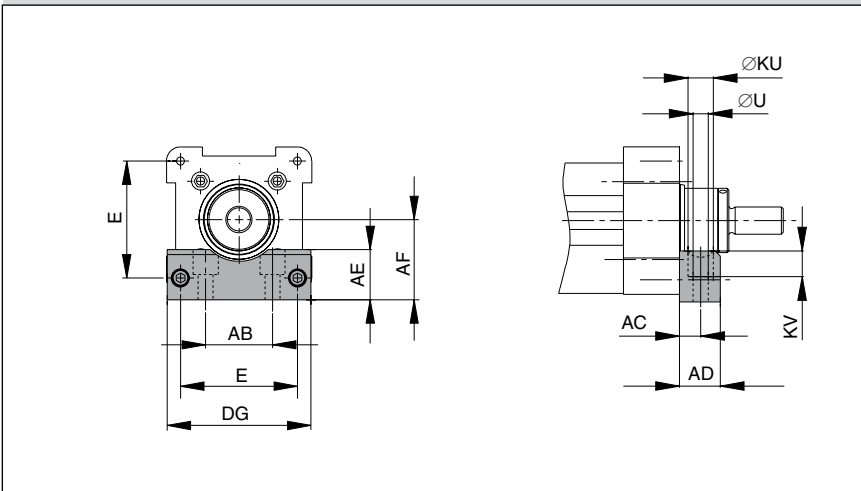

Dimension Table [mm] and Order Instruction

Series	E	ØU	AB	AC	AD	AE	AF	CL	DG	ØKU	KV	Order No. *)	
												Type A1SR	Type C1SR
OSP-E25SBR, STR	27	5.8	27	16	22	18	22	2.5	39	-	-	12263	-
OSP-E32SBR, STR	36	6.6	36	18	26	20	30	3.0	50	-	-	12264	-
OSP-E50SBR, STR	70	9.0	40	12	24	30	48	-	86	15	15	-	12265

*) = single

Important:

With the OSP-E Screw series, the end cap mounting can only be used at the end opposite to the drive shaft.

We recommend the application of two mid section supports (page 136 ff) at the drive shaft end of the actuator.

End Cap Mounting

Size 25, 32, 50



- Series OSP-E..SBR, ..STR Actuator with Screw and extending rod

On the end-face of each end cap there are four threaded holes for mounting the actuator.

The hole layout is square, so that the mounting can be fitted to the bottom, top or either side.

Material:

Series OSP-25 to 32:

Galvanised steel.

Series OSP-50:

Anodized aluminium.



Flange Mounting C-E

Size 25, 32, 50




- Series OSP-E..SBR, ..STR Actuator with Screw and piston rod

The flange mounting C-E can only be mounted at the piston rod end of the actuator.

Material: Aluminium

Series OSP-E25SBR, STR to E50SBR, STR: Type C-E..

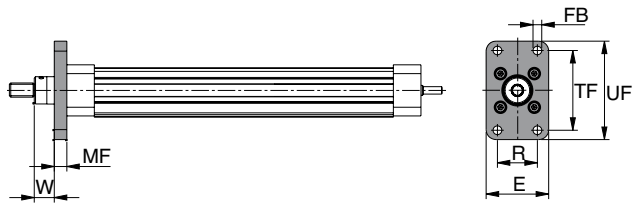

Dimension Table [mm] and Order Instructions

Series	Type	∅ FB	E	MF	R	TF	UF	W	Order No.
OSP-E25SBR, STR	C-E25	7	50	10	32	64	79	16	12232
OSP-E32SBR, STR	C-E32	9	56	10	36	72	90	16	12233
OSP-E50SBR, STR	C-E50	12	100	16	63	126	153	21	12234



Profile Mounting



Content

Description	Page
Profile Mounting	148
Adaptor Profile	151
Connection Profile	153
Trunnion/Pivot MountingEN/EL	154

Profile Mountings

Size 20, 25, 32, 50



• Series OSP-E

Material: Anodized aluminum

Stainless steel version on request.


The mountings are supplied in pairs.

Weight (mass) [kg]	
Series	Weight (mass) [kg] (pair)
MAE-20	0.3
MAE-25	0.3
MAE-32	0.4
MAE-50	0.8




Series OSP-E25 to E50, Type MAE-..

OSP-E..B, ..SB, ..ST, ..SBR, ..STR

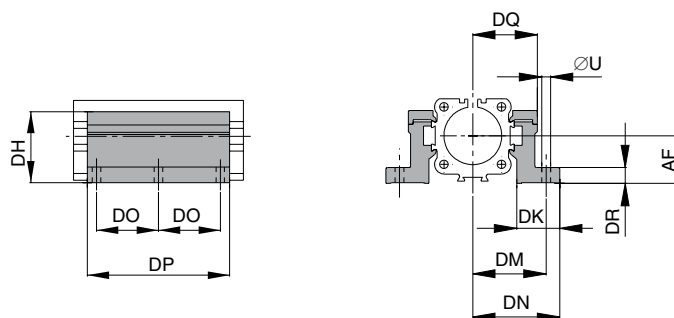

Series OSP-E20BHD to E50BHD, Type MAE-..

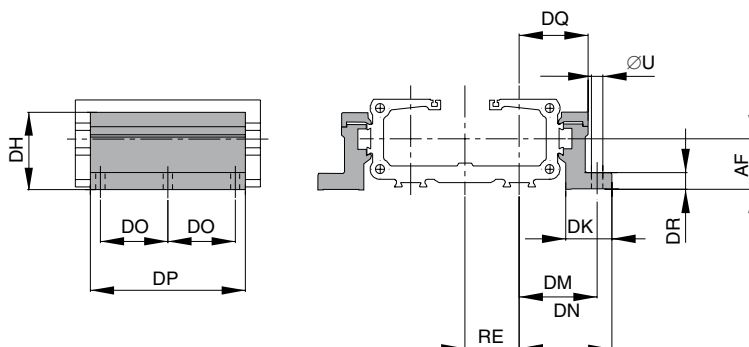


Dimension Table [mm] and Order Instructions

Series	Type	R	U	AF	DF	DH	DK	DM	DN	DO	DP	DQ	DR	DT	EF	EM	EN	EQ	RE	Order No.
OSP-E20	MAE-20	M5	5.5	22	27	38	26	33.5	41.0	40	92	28.0	8	10	41.5	28.5	49	36	23	12278
OSP-E25	MAE-25	M5	5.5	22	27	38	26	40.0	47.5	40	92	34.5	8	10	41.5	28.5	49	36	26	12278
OSP-E32	MAE-32	M5	5.5	30	33	46	27	46.0	54.5	40	92	40.5	10	10	48.5	35.5	57	43	32	12279
OSP-E50	MAE-50	M6	7.0	48	40	71	34	59.0	67.0	45	112	52.0	10	11	64.0	45.0	72	57	44	12280

Series OSP-E20BHD to E50BHD: Type E1

(Mounting with through holes)

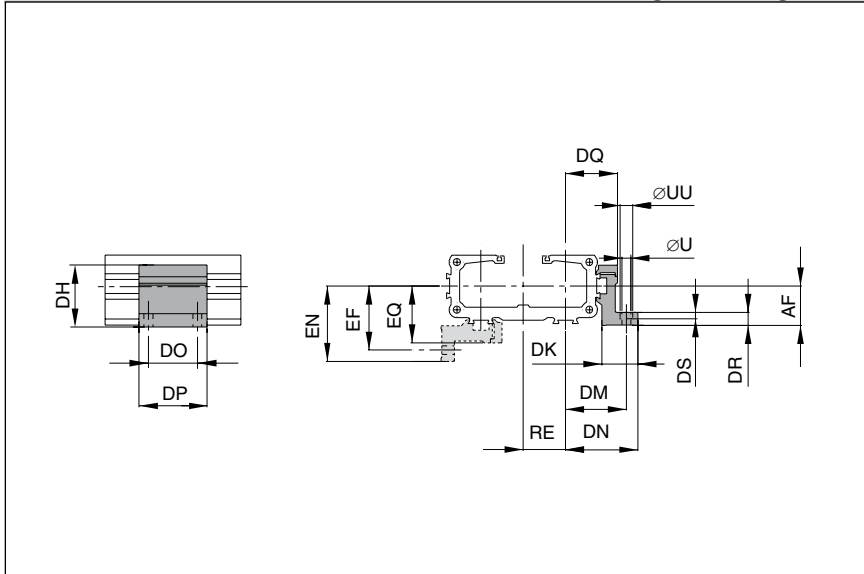

Profile Mounting

Size 20, 25, 32, 50



- **OSP-E ..BHD**
Belt actuator with integrated guide

Note on Types E1 and D1:
The Profile Mounting can also be mounted on the underside of the actuator, in which case its distance from the centre of the actuator is different.


For design notes, see page 14 ff.

Stainless steel version on request.

The mountings are supplied singly.

Series OSP-E20BHD to E50BHD: Type D1

(Mountings with internal thread)

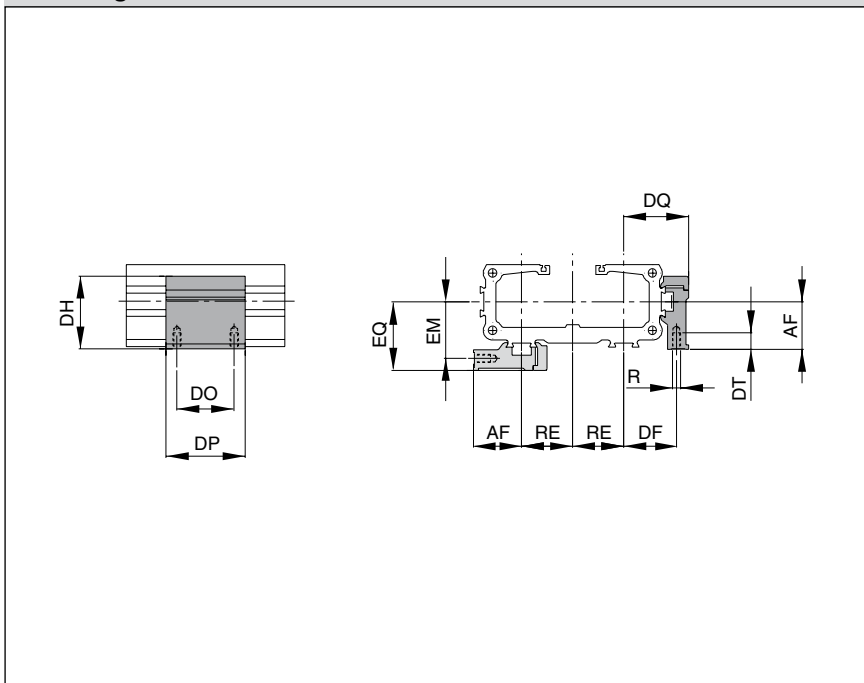

Dimension Table [mm] and Order Instructions

Series	R	U	UU	AF	DF	DH	DK	DM	DN	DO	DP	DQ	DR	DS	DT	EF	EM	EN	EQ	RE	Order No.	
																					Type E1	Type D1
OSP-E20	M5	5.5	10	22	20.5	38	26	33.5	41.0	36	50	28.0	8	5.7	10	41.1	28.1	48.6	35.6	23	20009	20008
OSP-E25	M5	5.5	10	22	27.0	38	26	40.0	47.5	36	50	34.5	8	5.7	10	41.5	28.5	49.0	36.0	26	20009	20008
OSP-E32	M5	5.5	10	30	33.0	46	27	46.0	54.5	36	50	40.5	10	5.7	10	48.5	35.5	57.0	43.0	32	20158	20157
OSP-E50	M6	7.0	-	48	40.0	71	34	59.0	67.0	45	60	52.0	10	-	11	64.0	45.0	72.0	57.0	44	15536	15534

Profile Mounting



Size 25, 32, 50



- **OSP-E..B**
Belt actuator with internal plain bearing guide
- **OSP-E..SB, ..ST**
Screw actuator with internal plain bearing guide
- **OSP-E..SBR, ..STR**
Screw actuator with internal plain bearing guide and piston rod

Note on Types E1 and D1:
The profile mounting can also be mounted on the underside of the actuator, in which case its distance from the centre of the actuator is different.

Stainless steel version on request.

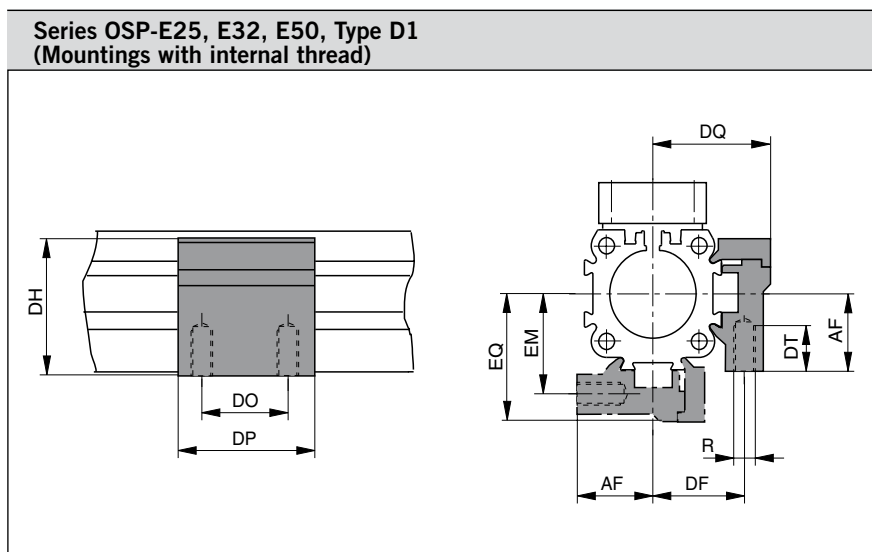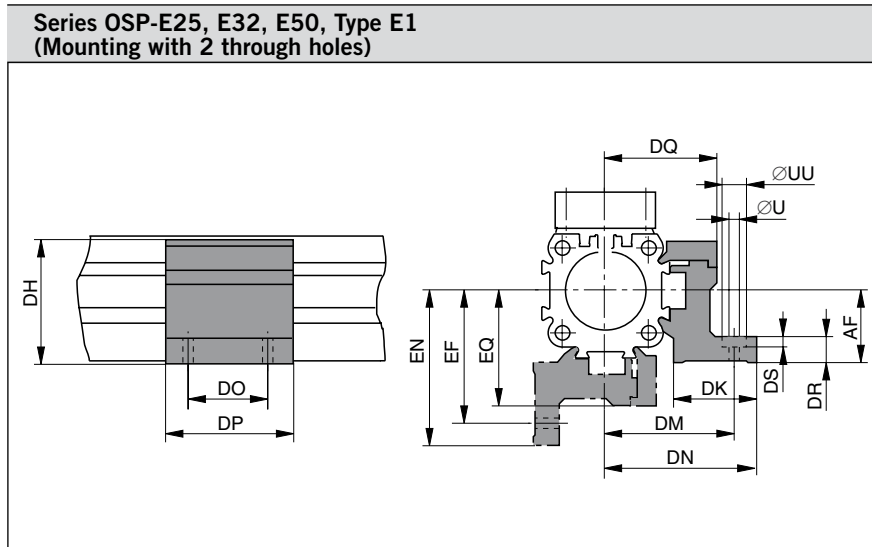


Dimension Table [mm] and Order Instructions																					
Series	R	U	UU	AF	DF	DH	DK	DM	DN	DO	DP	DQ	DR	DS	DT	EF	EM	EN	EQ	Order No.	
																				Type E1	Type D1
OSP-E25	M5	5.5	10	22	27	38	26	40	47.5	36	50	34.5	8	5.7	10	41.5	28.5	49	36	20009	20008
OSP-E32	M5	5.5	10	30	33	46	27	46	54.5	36	50	40.5	10	5.7	10	48.5	35.5	57	43	20158	20157
OSP-E50	M6	7.0	-	48	40	71	34	59	67.0	45	60	52.0	10	-	11	64.0	45.0	72	57	20163	20162



Series OSP-E25 to E50

OSP-E..B, ..SB, ..ST, ..SBR, ..STR

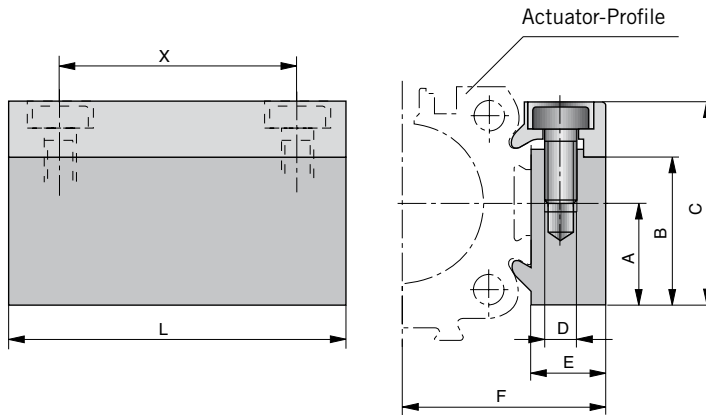

Adapter Profile

Size 20, 25, 32, 50




• Series OSP-E

Adaptor Profile OSP

- A universal attachment for mounting of additional items
- Solid material

The mountings are supplied singly.

Series OSP-E20BHD to E50BHD

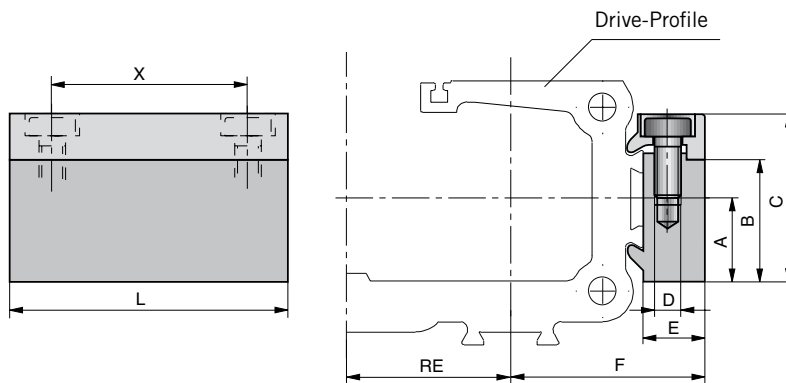

Dimension Table [mm] and Order Instructions

Series	A	B	C	D	E	F	L	X	RE	Order No.	
										Standard	Stainless
OSP-E20	16	23	32	M5	10.5	24.0	50	36	23	20006	20186
OSP-E25	16	23	32	M5	10.5	30.5	50	36	26	20006	20186
OSP-E32	16	23	32	M5	10.5	36.5	50	36	32	20006	20186
OSP-E50	20	33	43	M6	14.0	52.0	80	65	44	20025	20267



Adapter Profile

T-slot

Size 20, 25, 32, 50



- Series OSP-E


T-Nut Profile OSP

- A universal attachment for mounting with standard T-nuts.


The mountings are supplied singly.

Series OSP-E25 to E50

OSP-E..B, ..SB, ..ST, ..SBR, ..STR

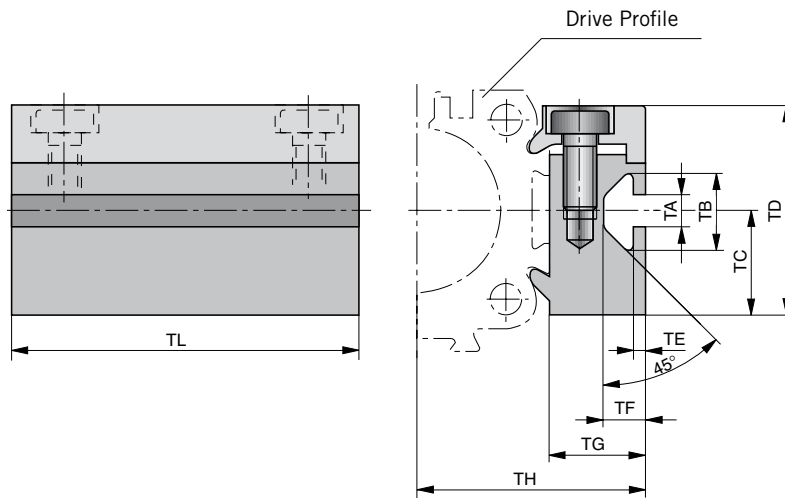


Series OSP-E20BHD to E50BHD

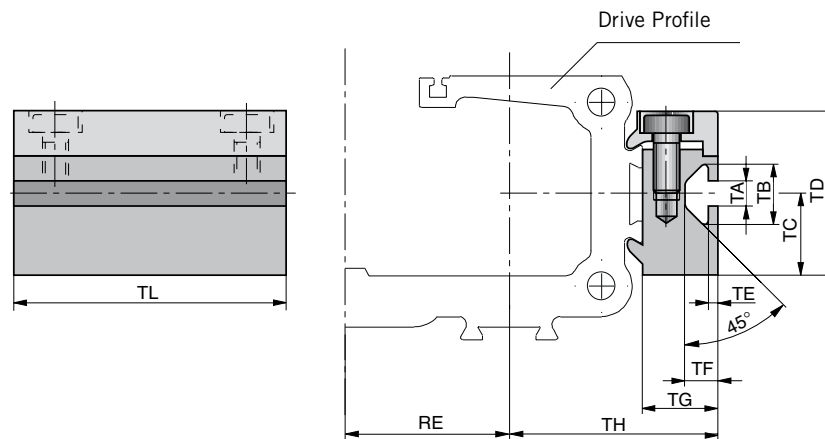

Dimension Table [mm] and Order Instructions

Series	RE	TA	TB	TC	TD	TE	TF	TG	TH	TL	Order No.	
											Standard	Stainless
OSP-E20	23	5.0	11.5	16	32	1.8	6.4	14.5	28.0	50	20007	20187
OSP-E25	26	5.0	11.5	16	32	1.8	6.4	14.5	34.5	50	20007	20187
OSP-E32	32	5.0	11.5	16	32	1.8	6.4	14.5	40.5	50	20007	20187
OSP-E50	44	8.2	20.0	20	43	4.5	12.3	20.0	58.0	80	20026	20268

Adaptor Profile

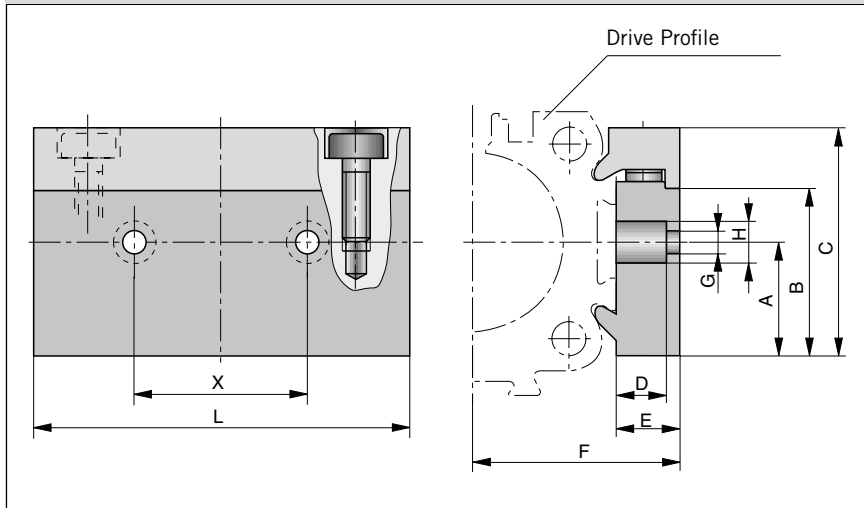

Adapter Profile Connector

Size 25, 32, 50

OSP
ORIGA
SYSTEM
PLUS

to connect

- Series OSP-E with system profiles
- Series OSP-E with Series OSP-E or OSP-P

Dimension Table [mm] and Order Instructions

Series	for the connection to the driver of	A	B	C	D	E	F	G	H	L	X	Order No.
OSP-E25	OSP32-50	16	23	32	8.5	10.5	30.5	6.6	11	60	27	20850
OSP-E32	OSP32-50	16	23	32	8.5	10.5	36.5	6.6	11	60	27	20850
OSP-E50	OSP32-50	20	33	43	8.0	14.0	52.0	6.6	11	60	27	20851

Connecting possibilities

Connection of series OSP-E with system profiles



Connection of series OSP-E with series OSP-E/OSP-P



The mountings are supplied singly.



Trunnion Mounting EN

Pivot Mounting EL

Size 25, 32, 50



- Series OSP-E..SBR, ..STR
For Actuator with spindle drive and piston rod

The trunnion mounting is fitted to the dovetail rails of the actuator profile and is continuously adjustable in axial direction.

The mountings are supplied in pairs.


Trunnion Mounting EN



Pivot Mounting EL



Series OSP-E25SBR, 25STR to 50SBR, 50STR: Type EN-..

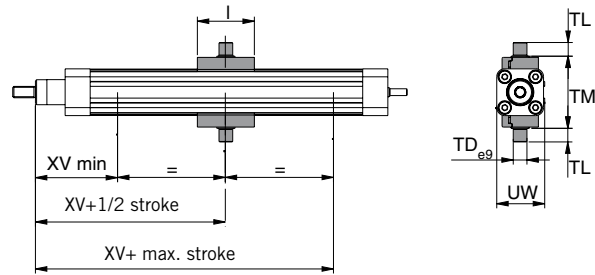


Material: Aluminium

Dimension Table [mm] and Order Instructions – for Trunnion Mounting EN-..

Series	Type	l	∅ TD e9	TL	TM	UW	XV min	XV+ 1/2Stroke	XV+ max.Stroke	Order No.
OSP-E25SBR, STR	EN-E25	50	12	12	63	42	73.0	83	62.0	12235
OSP-E32SBR, STR	EN-E32	50	16	16	75	52	76.5	90	69.5	12236
OSP-E50SBR, STR	EN-E50	80	20	20	108	87	110	110	84.0	12237

Series OSP-E25SBR, 25STR to 50SBR, 50STR: Type EL-..

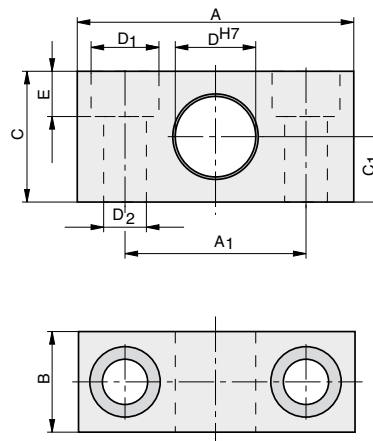

Material: Aluminium

Dimension Table [mm] and Order Instructions – for Pivot Mounting EL-..

Series	Type	A	A ₁	B	C	C ₁	∅D ^{H7}	∅D ₁	∅D ₂	E	Weight (mass) (kg)	Order No.
OSP-E25SBR, STR	EL-032	55	36	20	26	13	12	13.5	8.4	9	0.06	PD23381
OSP-E32SBR, STR	EL-040/050	55	36	20	26	13	16	13.5	8.4	9	0.06	PD23382
OSP-E50SBR, STR	EL-063/080	65	42	25	30	15	20	16.5	10.5	11	0.10	PD23383

Compensation



Contents

Description	Page
Compensation (OSP-E..B, ..SB, ..ST)	156
Inversion Mounting (OSP-E..B, ..SB, ..ST)	158
Piston Rod Eye ISO 8139	159
Piston Rod Clevis ISO 8140	159
Piston Rod Compensating Coupling	160

Clevis Mounting

Size 25, 32, 50



- **OSP-E..B**
Belt actuator with internal plain bearing guide
- **OSP-E..SB, ..ST**
Screw actuator with internal plain bearing guide

When external guides are used, parallelism deviations can lead to mechanical strain on the piston. This can be avoided by the use of a Compensation.


Freedom of movement is provided as follows:

- **Tilting in direction of movement**
- **Vertical compensation**
- **Tilting sideways**
- **Horizontal compensation**

A stainless steel version is also available.


Series OSP-E25 to E32

OSP-E..B, ..SB, ..ST

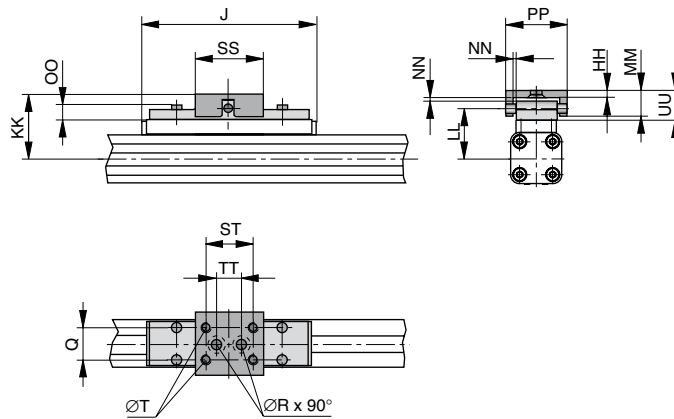

Series OSP-E50



OSP-E..B, ..SB, ..ST

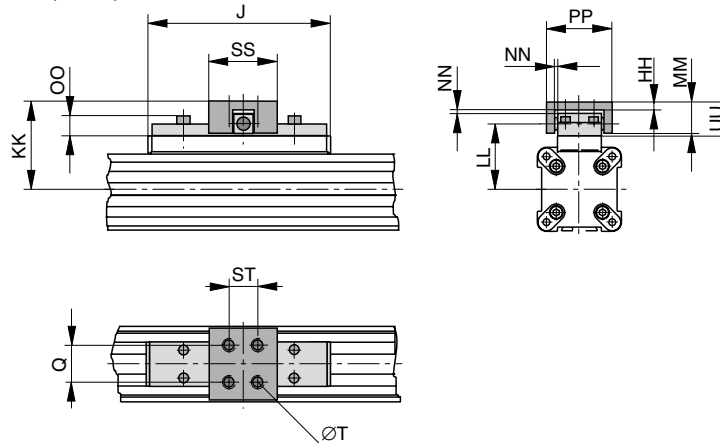

Dimension Table [mm] and Order Instructions


Series	J	Q	T	øR	HH	KK	LL	MM	NN*	OO	PP	SS	ST	TT	UU	Order No.	
																Standard	Stainless
OSP-E25	117	16	M5	5.5	3.5	52	39	19	2	9	38	40	30	16	21	20005	20092
OSP-E32	152	25	M6	6.6	6.0	68	50	28	2	13	62	60	46	40	30	20096	20094
OSP-E50	200	25	M6	-	6.0	79	61	28	2	13	62	60	46	-	30	20097	20095

* Dimension NN gives the possible plus and minus play in horizontal and vertical movement, which also makes tilting sideways possible.

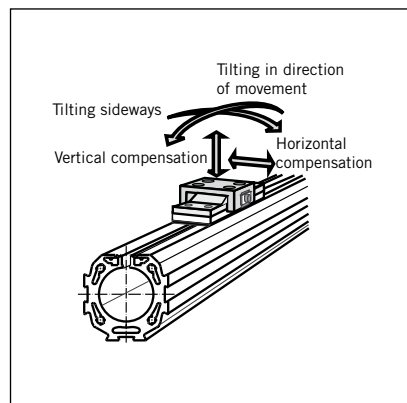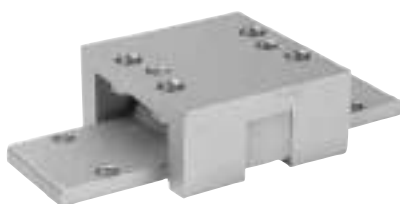


Series OSP-E25 to E32

OSP-E..B, ..SB, ..ST

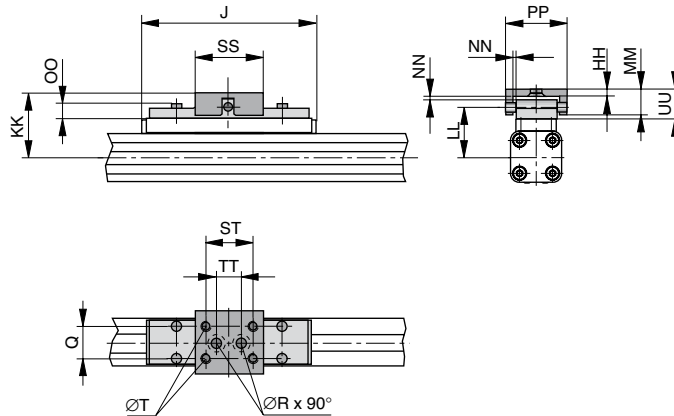

Series OSP-E50

OSP-E..B, ..SB, ..ST

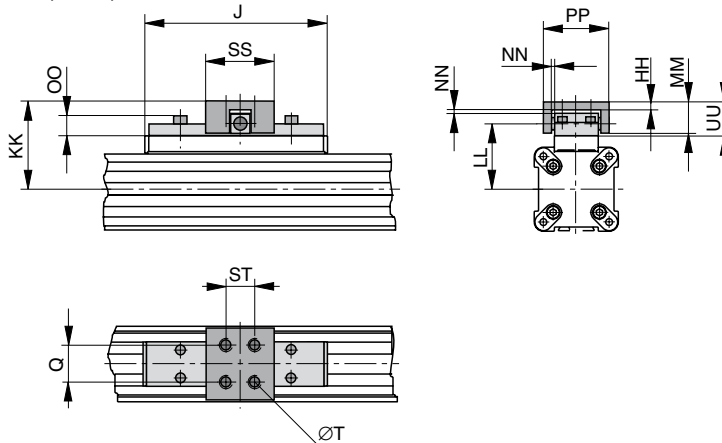

Clevis Mounting, low back lash

Size 25, 32, 50



- **OSP-E..B**
Belt actuator with internal plain bearing guide
- **OSP-E..SB, ..ST**
Screw actuator with internal plain bearing guide

When external guides are used, parallelism deviations can lead to mechanical strain on the piston. This can be avoided by the use of a clevis mounting.

In the drive direction the clevis mounting has a low backlash fit. Freedom of movement is provided as follows:



- **Tilting in direction of movement**
- **Vertical compensation**
- **Tilting sideways**
- **Horizontal compensation**

A stainless steel version is also available.

Dimension Table [mm] and Order Instructions

Series	J	Q	T	øR	HH	KK	LL	MM	NN*	OO	PP	SS	ST	TT	UU	Order No.	
																Standard	Stainless
OSP-E25	117	16	M5	5.5	3.5	52	39	19	2	9	49	40	30	16	21	20496	20498
OSP-E32	152	25	M6	6.6	6.0	68	50	28	2	13	69	60	46	40	30	20497	20499
OSP-E50	200	25	M6	-	6.0	79	61	28	2	13	69	60	46	-	30	20812	20818

* Dimension NN gives the possible plus and minus play in horizontal and vertical movement, which also makes tilting sideways possible

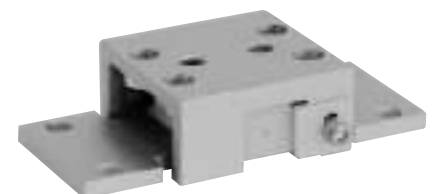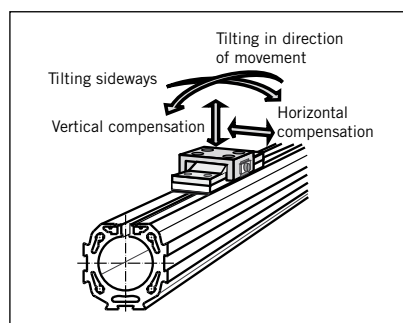

Inversion Mounting

Size 25, 32, 50



- **OSP-E..B**
Belt actuator with internal plain bearing guide
- **OSP-E..SB, ..ST**
Screw actuator with internal plain bearing guide

In dirty environments, or where there are special space problems, inversion of the cylinder is recommended. The inversion bracket transfers the driving force to the opposite side of the cylinder. The size and position of the mounting holes are the same as on the standard cylinder.

Stainless steel version on request.

Please note:

Other components of the OSP system such as **Profile Mountings**, **magnetic switches** can still be mounted on the free side of the cylinder.


Important Note:

May be used in combination with Compensation, ref. dimensions in page 143.




Series OSP-E25 to E32

OSP-E..B, ..SB, ..ST

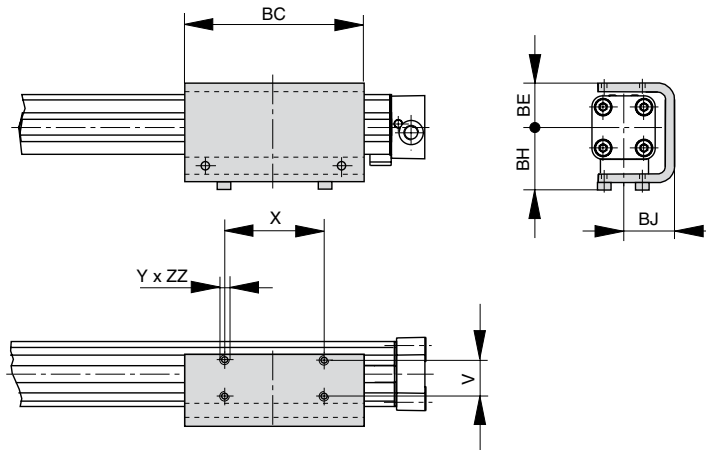

Series OSP-E50


OSP-E..B, ..SB, ..ST

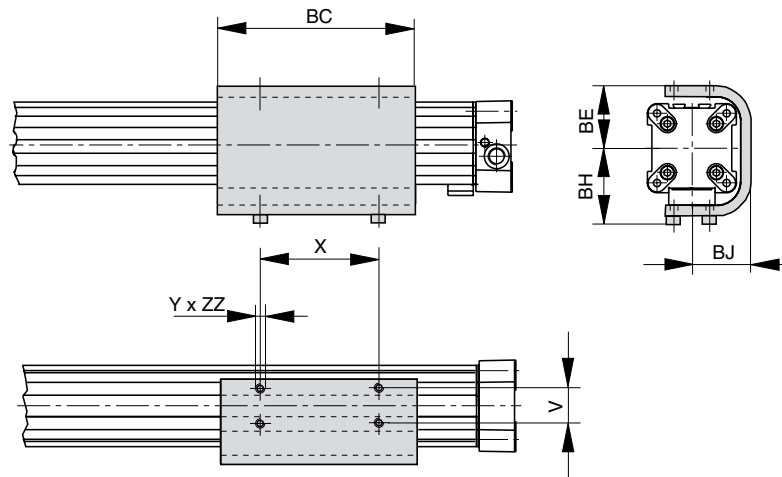

Dimension Table (mm) and Order Instructions

Series	V	X	Y	BC	BE	BH	BJ	ZZ	Order No.
OSP-E25	25	65	M5	117	31	43	33.5	6	20037
OSP-E32	27	90	M6	150	38	51	39.5	6	20161
OSP-E50	27	110	M6	200	55	65	52.0	8	20166

Piston Rod Eye according to ISO 8139 (CETOP RP103 P)
Type: GA-..

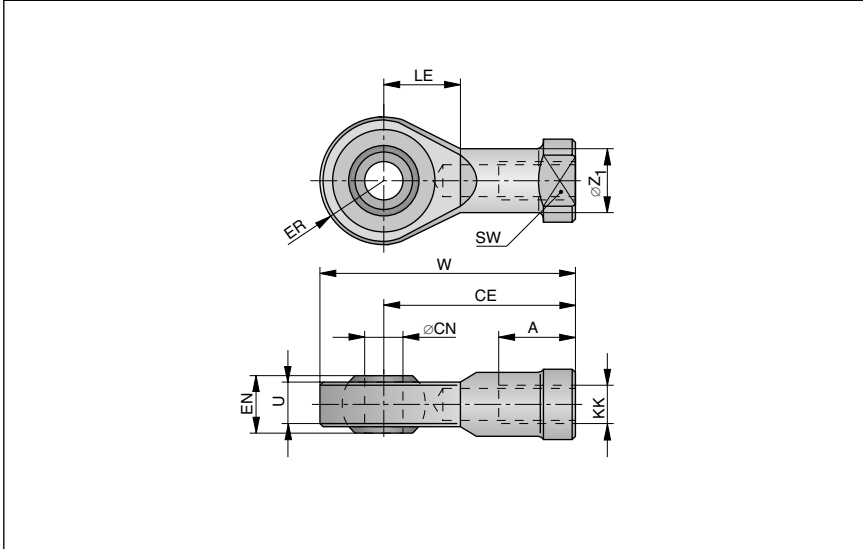

Order Instructions, Dimension Table [mm], Weight

Series	Type	A	CE	ϕ CN	EN	ER	KK	LE	SW	U	W	ϕZ_1	Weight [kg]	Order No.
OSP-E25SBR, STR	GA-M10x1.25	20	43	10	14	14	M10x1.25	15	17	10.5	57	15	0.072	KY6147
OSP-E32SBR, STR	GA-M10x1.25	20	43	10	14	14	M10x1.25	15	17	10.5	57	15	0.072	KY6147
OSP-E50SBR, STR	GA-M16x1.5	28	64	16	21	21	M16x1.5	22	22	15.0	85	22	0.21	KY6150


Piston Rod Eye according to ISO 8139



- OSP-E..SBR, STR
Screw actuator with internal plain bearing guide ans piston rod



Piston Rod Clevis according to ISO 8140 (CETOP RP102P)
Type: GK-..

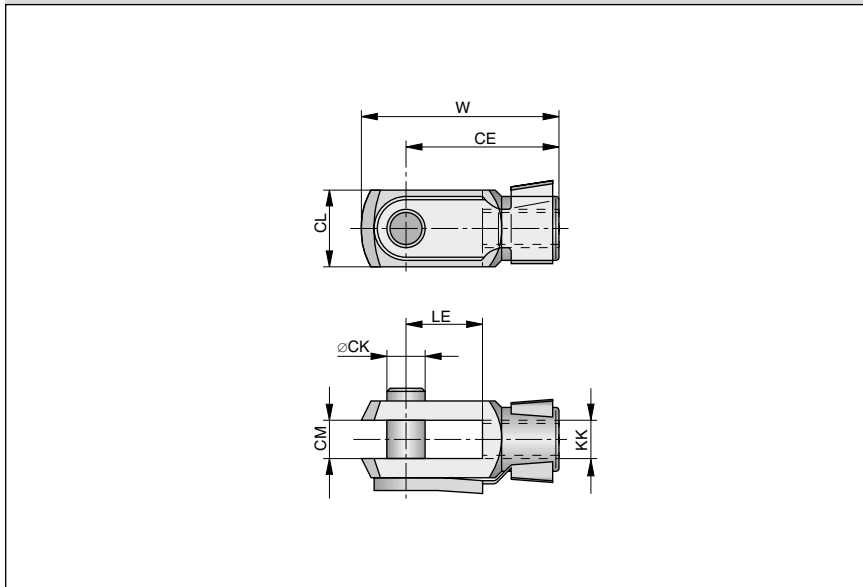

Order Instructions, Dimension Table [mm], Weight

Series	Type	ϕ CK	CE	CL	CM	KK	LE	W	Weight[kg]	Order No.
OSP-E25SBR, STR	GK-M10x1.25	10	40	20	10	M10x1.25	20	52	0.08	KY6135
OSP-E32SBR, STR	GK-M10x1.25	10	40	20	10	M10x1.25	20	52	0.08	KY6135
OSP-E50SBR, STR	GK-M16x1.5	16	64	32	16	M16x1.5	32	83	0.30	KY6139

Piston Rod Clevis according to ISO 8140





- OSP-E..SBR, ..STR
Screw actuator with internal plain bearing guide ans piston rod




Piston Rod Compensating Coupling



- OSP-E..SBR, ..STR
Screw actuator with internal plain bearing guide and piston rod

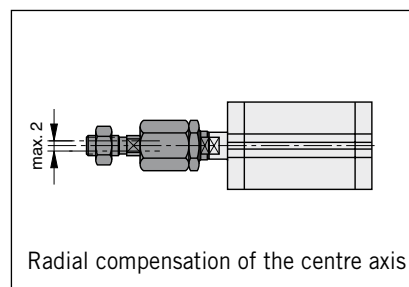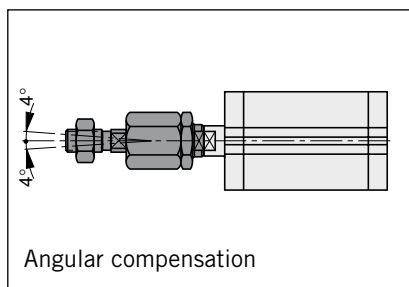


Piston Rod compensating coupling Type: AK-..

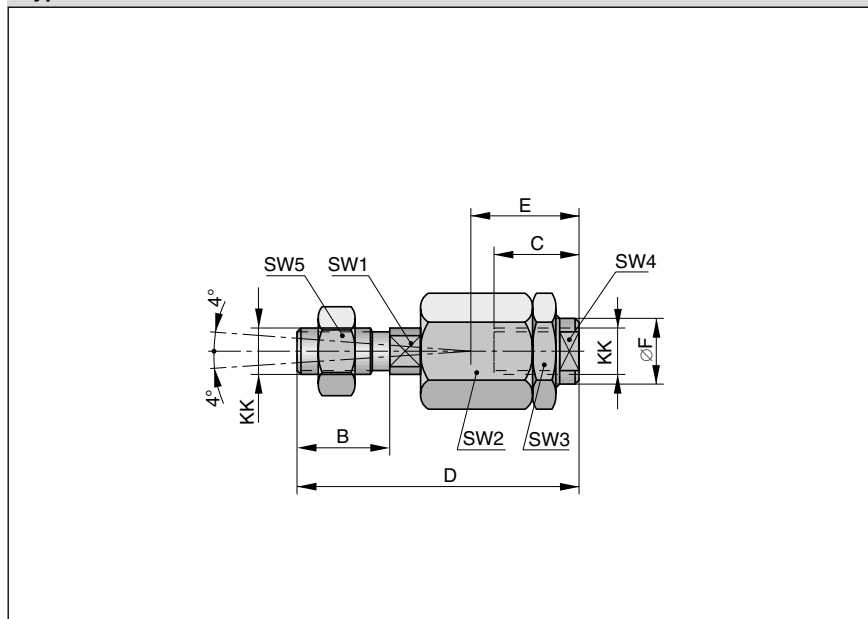

Order Instructions, Dimension Table [mm], Weight

Series	Type	B	C	D \pm 2	E	\varnothing F	KK	SW1	SW2	SW3	SW4	SW5	Weight [kg]	Order No.
OSP-E25SBR, STR	AK-M10x1.25	20	23	73	31	21.5	M10x1.25	12	30	30	19	17	0.218	KY 1129
OSP-E32SBR, STR	AK-M10x1.25	20	23	73	31	21.5	M10x1.25	12	30	30	19	17	0.218	KY 1129
OSP-E50SBR, STR	AK-M16x1.5	40	32	108	45	33.5	M16x1.5	19	41	41	30	30	0.637	KY 1133

Guide Mounting

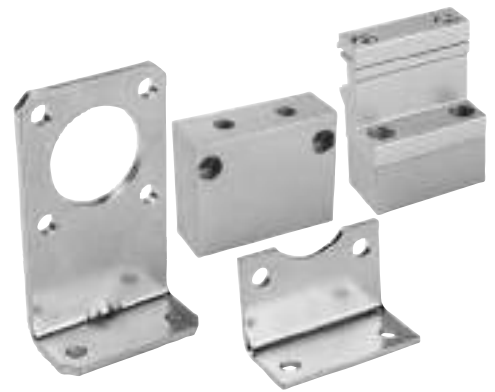

Contents





Description	Page
Overview	162
End Cap Mounting	163
Profile Mounting	164

Overview

Mountings for Linear Drive Actuators OSP-E with OSP-Guides




- OSP-E..B
Belt actuator with internal plain bearing guide
- OSP-E..SB, ..ST
Screw actuator with internal plain bearing guide

Overview											
Type of mounting des Zylinders	Type	Versions – OSP-guide									
		SLIDELINE PROLINE MULTIBRAKE			POWERSLIDE						
		25	32	50	25/ 25	25/ 35	25/ 44	32/ 35	32/ 44	50/ 60	50/ 76
End Cap Mounting  ▲	Type A1										
	Type A2	0	0								
	Type A3				0	0		0			
End Cap Mounting reinforced  ▲	Type B1	X	X		X	X	X	X	X		
	Type B3										
	Type B4						0		0		
End Cap Mounting  ▲	Type C1			X						X	X
	Type C2			0							
	Type C3									0	
	Type C4										0
Mid-Section Support narrow Mid-Section Support wide  ▲ ▲	Type D1	X	X	X	X	X	X	X	X	X	X
	Type E1	X	X	X	X	X	X	X	X	X	X
	Type E2	0	0	0							
	Type E3				0	0		0		0	
	Type E4						0		0		0

X = mounting position carriage top (12 clock position)

0 = mounting position carriage side (3 or 9 clock position)

 = available components


*** Please note:**

With series OSP-E-Spindle the end cap mountings A, B and C can only be fitted to the side opposite to the drive shaft. On the side of the drive shaft we recommend to use our Profile Mountings (page 135 ff).



Series OSP – E25, E32: Type A

OSP-E..B, ..SB, ..ST

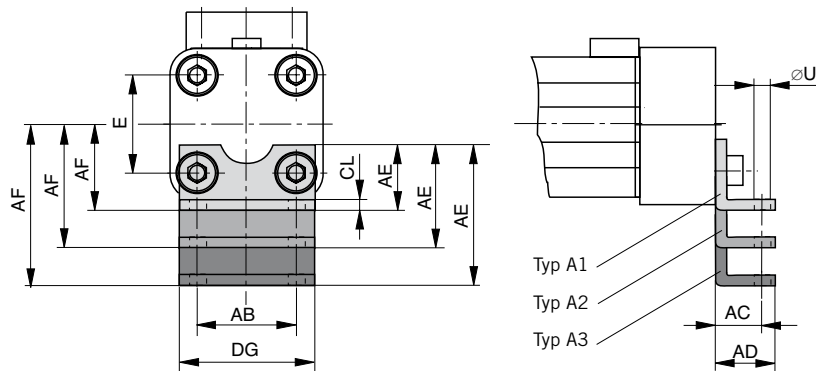

End Cap Mounting *


At the end face of each end caps there are four holes with internal threads to fix the drive. The hole layout is square so that the drive can be fitted on the bottom, the top or either side.

Material: series OSP-25, 32: steel, zinc galvanized
series OSP-50: aluminium, anodized

The mountings are supplied in pairs.

Series OSP – E25, E32: Type B


OSP-E..B, ..SB, ..ST

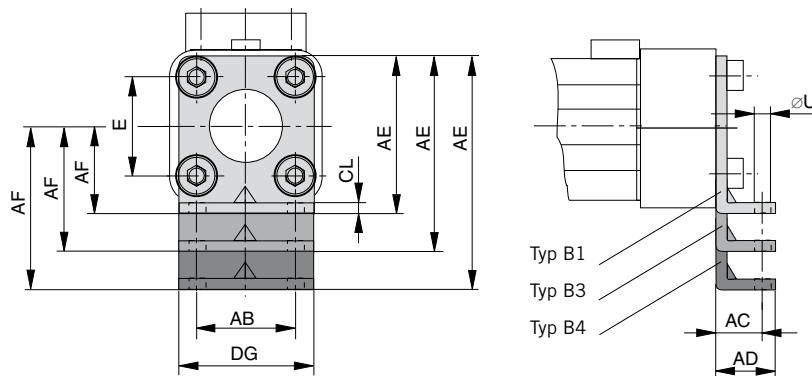

Dimension Table [mm]
– Dimension AE and AF (Depending on type of mounting)

Type of mount.	Dimension AE at size			AF at size		
	25	32	50	25	32	50
A1	18	20	-	22	30	-
A2	33	34	-	37	44	-
A3	45	42	-	49	52	-
B1	42	55	-	22	30	-
B3	-	-	-	-	-	-
B4	80	85	-	60	60	-
C1	-	-	30	-	-	48
C2	-	-	39	-	-	57
C3	-	-	54	-	-	72
C4	-	-	77	-	-	95

Series OSP – E50: Type C

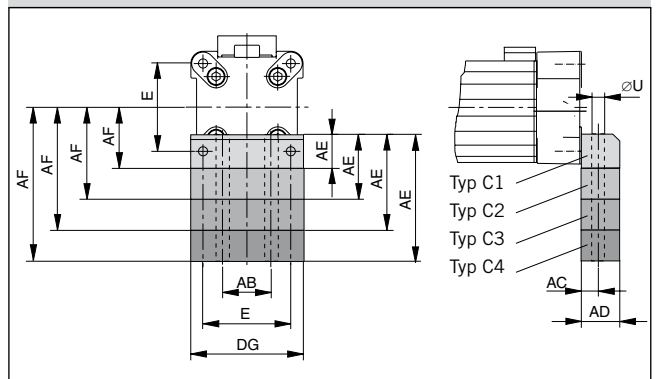

Dimension Table [mm]

Series	E	øU	AB	AC	AD	CL	D
OSP-E25	27	5.8	27	16.0	22	2.5	39
OSP-E32	36	6.6	36	18.0	26	3.0	50
OSP-E50	70	9.0	40	12.5	24	-	86

* see survey for mounting types on page 129 ff

Profile Mounting

Information on type E1 and D1:

The Profile Mountings can also be fitted to the bottom side of the drive. In this case please observe the new centre line dimensions of the drive.


For layout information please refer to the page 100 ff.

Stainless version on request.




Series OSP-E25, E32, E50: Type E. (Mounting with through hole)

OSP-E..B, ..SB, ..ST, ..SBR, ..STR

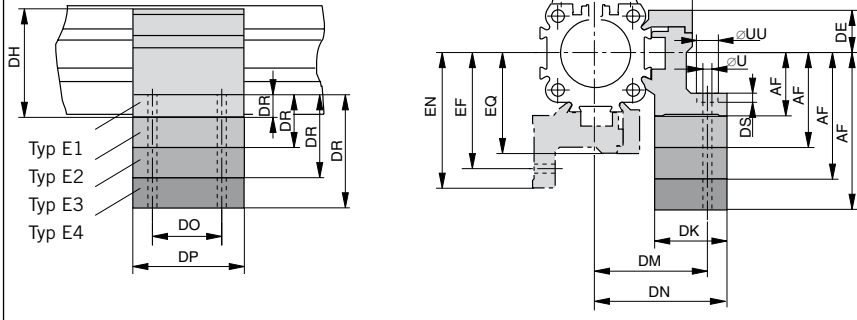

Series OSP-E25, E32, E50: Type D1 (Mounting with internal thread)

OSP-E..B, ..SB, ..ST, ..SBR, ..STR

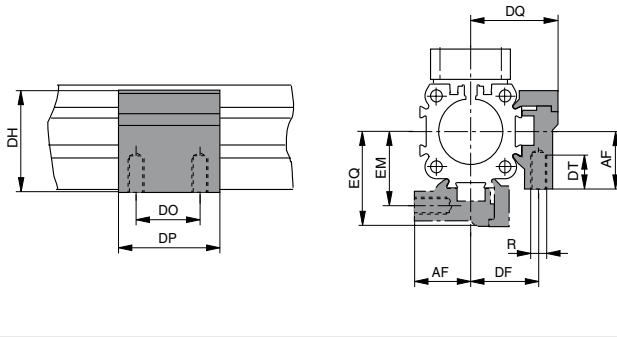

Dimension Table [mm]
– Dimension DR and AF (Depending on type of mounting)

Type of mount.	Dimensions DR at size			AF at size		
	25	32	50	25	32	50
D1	–	–	–	22	30	48
E1	8	10	10	22	30	48
E2	23	24	19	37	44	57
E3	35	32	31	49	52	72
E4	46	40	57	60	60	95

Dimension Table [mm]

Series EQ	R	U	UU	DE	DF	DH	DK	DM	DN	DO	DP	DQ	DS	DT	EF	EM	EN	
OSP-E25	M5	5.5	10	16	27	38	26	40	47.5	36	50	34.5	5.7	10	41.5	28.5	49	36
OSP-E32	M5	5.5	10	16	33	46	27	46	54.5	36	50	40.5	5.7	10	48.5	35.5	57	43
OSP-E50	M6	7.0	–	23	40	71	34	59	67.0	45	60	52.0	–	11	64.0	45.0	72	57

Order Instructions for Mountings Type A – Type B – Type C – Type D – Type E

Type of mounting (Versions)	Order No. Size		
	25	32	50
A1 *1)	2010	3010	–
A2 *1)	2040	3040	–
A3 *1)	2060	3060	–
B1 *1)	20311	20313	–
B3 *1)	–	–	–
B4 *1)	20312	20314	–
C1 *1)	–	–	5010
C2 *1)	–	–	20349
C3 *1)	–	–	20350
C4 *1)	–	–	20351
D1 *2)	20008	20157	20162
E1 *2)	20009	20158	20163
E2 *2)	20352	20355	20361
E3 *2)	20353	20356	20362
E4 *2)	20354	20357	20363

*1) The mountings are supplied in pairs

*2) The mountings are supplied simply

Magnetic Sensors



Magnetic Sensors



Type P8S

The new generation of t-slot sensors convince with easy mounting avoiding special tools and with a drop in mountage. Due to new electronic the hysteresis is very small and allows a very accurate switching point.

Magnetic sensors are used for contactless electric sensing of the carrier position, e.g. for end or homing positions of a linear acuator. The field of magnets mounted as standard into the carriage activate the sensor.

Carriage speed and switching distance affect signal duration and should be considered in conjunction with the minimum reaction time of ancillary control equipment.

In accordance to this, the contact travel must be included in the calculation.

$$\text{Min. reaction time} = \frac{\text{Switching distance}}{\text{Piston speed}}$$




Technical Data	Unit	P8S-GR P8S-GE	P8S-GP P8S-GQ P8S-GN P8S-GM
Magnetic Sensor			
Electrical Characteristics			
Switching output / function		Reed / NO Reed / NC	PNP / NO PNP / NC NPN / NO NPN / NC
Electric configuration		2-pole	3-pole
Indicator LED yellow		yes (not Reed NC)	
Operating voltage Ub	V	10 - 30 AC/DC	10 - 30 DC
Ripple of Ub	%	≤ 10	≤ 10
Voltage drop	V	≤ 3	≤ 2
Power consumption unloaded	mA	-	≤ 10
Continuous current	mA	≤ 500	≤ 200
Max. switching capacity	W	≤ 6	-
Switchable capacity load	nF	100	-
Switching frequency	Hz	≤ 400	≤ 1,000
Time delay before availability	ms	1.5 / 0.5	0.5 / 0.5
Switch point accuracy	mm	≤ 0.2	≤ 0.2
Switching distance	mm	ca. 15	ca. 15
Hysteresis	mm	2	2
EMC to EN 60947-5-2		yes	yes
Lifetime		≥ 20 10 ⁶ cycles	unlimited
Short circuit protection		-	yes
Reverse polarity protection		-	yes
Power-up pulse Suppression		-	yes
Protection for inductive load		-	yes
ATEX certification		-	on request
Mechanical characteristics			
Housing		PA12	
Cable type		PUR / black	
Cable cross section	mm ²	2 x 0,14	3 x 0,14
Bending radius fixed installation	mm	≥ 30	
Bending radius moving	mm	≥ 45	
Shock resistance			
Protection EN 60529	IP	68	
Ambient temperature range	°C	- 30 to + 80	
Vibration EN 60068-2-6	G	30, 11ms, 10 up to 55Hz, 1mm	
Shock EN 60068-2-27	G	50, 11ms	


Electrical connection

Reed 2-pole

normally open




normally closed




PNP 3-pole

normally open




normally closed




NPN 3-pole


normally open




normally closed




Dimensions (mm) – Type RST-K, EST-K

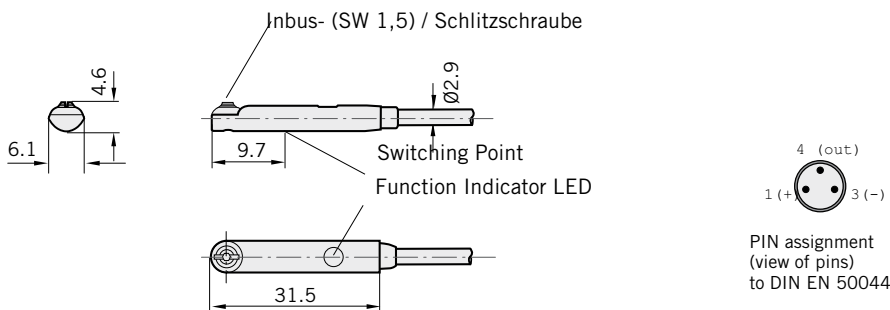


P8S-GxFAX, P8S-GEFFX, P8S-GxFDX, P8S-GEFRX cable with flying leads



P8S-GxSHX, P8S-GSNX cable with M8 snap in connector



P8S-GxCHX cable with M8R knurled screw connector



Magnetic Sensors RS and ES

Electric Service Life

Protective Measures

Type RS magnetic sensors are sensitive to excessive currents and inductions. With high switching frequencies and inductive loads such as relays, solenoid valves or lifting magnets, service life will be greatly reduced.


With **resistive** and **capacitive** loads with high switch-on current, such as light bulbs, a protective resistor should be fitted. This also applies to long cable lengths and voltages over 100 V.

In the switching of inductive loads such as relays, solenoid valves and lifting magnets, voltage peaks (transients) are generated which must be suppressed by protective diodes, RC loops or varistors.

Connection Examples


Load with protective circuits

- (a) Protective resistor for light bulb
- (b) Freewheel diode on inductivity
- (c) Varistor on inductivity
- (d) RC element on inductivity



For the type ES, external protective circuits are not normally needed.


Installation for Magnetic T-Slot Sensors

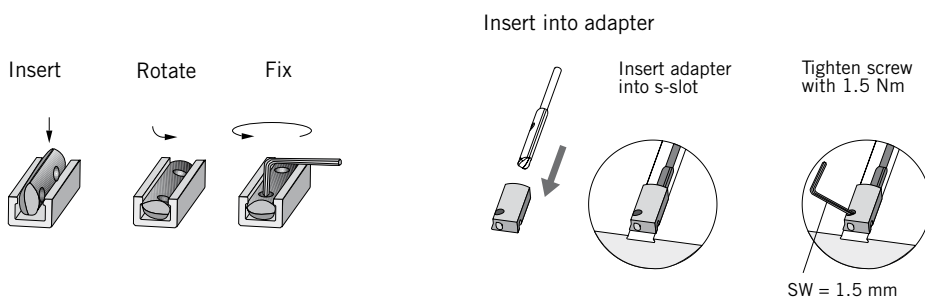


When arranging the magnetic sensors, please mind the position of the magnets integrated in the carrier as a function of the operating direction.
 „M“ indicates where magnet is fitted in carrier.

Positioning of Magnetic Sensors/Permanent Magnets — OSP-E..BHD

Standard Version




Drive Shaft Option = 0




Drive Shaft Option = 1

Bi-Parting Version




Drive Shaft Option = 2




Drive Shaft Option = 3

Magnetic sensors and magnets are externally fitted to the OSP-E..BV.
 For this purpose please order the magnetic sensor set (consisting of 2 magnetic sensors, 1 fastening rail and 2 magnets) for contactless position sensing.

Dimensions for magnetic sensor set Series OSP-E..BV

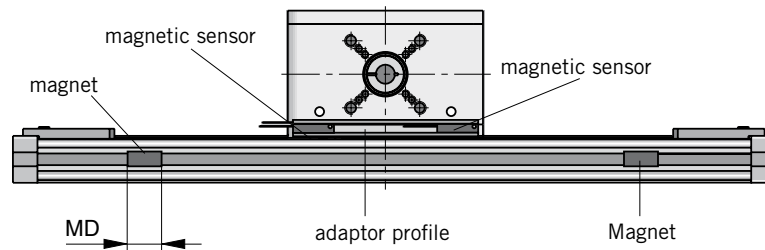


The magnetic sensor as well as the magnet can be fitted to either side

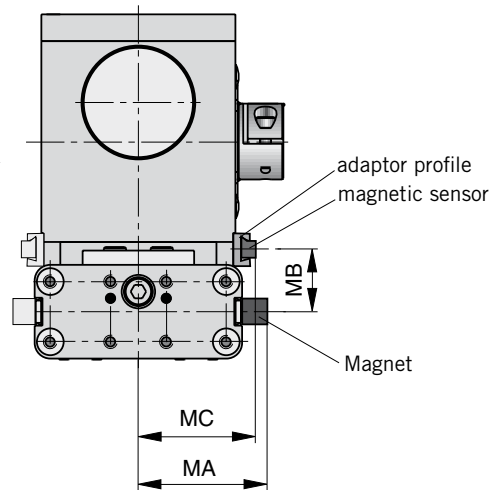

Dimensions see page 154 ff



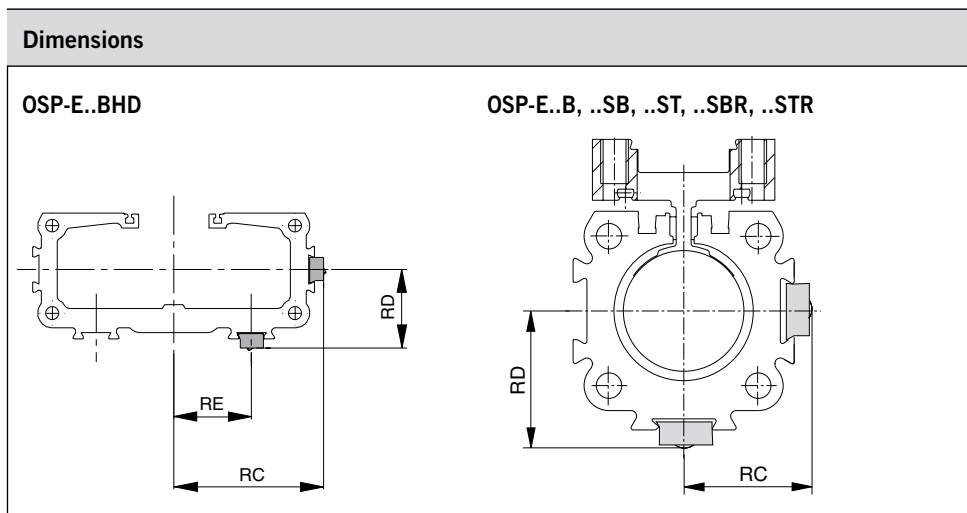

Dimension Table (mm)							
Series	Dimension						
	RC	RD	RE	MA	MB	MC	MD
OSP-E20BHD	41.5	26.6	23	-	-	-	-
OSP-E25BHD	51.0	27.0	26	-	-	-	-
OSP-E32BHD	63.0	34.0	32	-	-	-	-
OSP-E50BHD	87.0	48.0	34	-	-	-	-
OSP-E20BV	-	-	-	46	23.7	42.3	35
OSP-E25BV	-	-	-	56	26.0	51.0	35
OSP-E25*	25.0	27.0	-	-	-	-	-
OSP-E32*	31.0	34.0	-	-	-	-	-
OSP-E50*	43.0	48.0	-	-	-	-	-
* = ..B, ..SB, ..ST, ..SBR, ..STR							

Order Number				
Magnetic Sensors for all OSP-E Products (except OSP-E..STR)				
	M8* 0,3m	M8R** 0,3m	FL*** 3m	FL*** 10m
Reed NO (2-wire)	P8S-GRSHX	P8S-GRCHX	P8S-GRFAX	P8S-GRFDX
Reed NC (2-wire)	P8S-GESNX	-	P8S-GEFFX	P8S-GEFRX
PNP NO	P8S-GPSHX	P8S-GPCHX	P8S-GPFAX	P8S-GPFDX
PNP NC	P8S-GQSHX	-	P8S-GQFAX	P8S-GQFDX
NPN NO	P8S-GNSHX	P8S-GNCHX	P8S-GNFAX	P8S-GNFDX
NPN NC	P8S-GMSHX	-	P8S-GMFAX	P8S-GMFDX
Magnetic Sensors for OSP-E..STR (low sensitivity)				
Reed NO (2-wire), S-slot, flying leads, 5 m				KL3096
Reed NC (2-wire), S-slot, flying leads, 5 m				KL3388
PNP NO (3-wire), S-slot, M8 connector, 100 mm				KL3098
Magnetic Sensor Set for OSP-E..BV				
2 sensors, Reed NC (2-wire), 1 mounting rail, 2 magnets				18210
Connection Cables suitable for cable chain				
M8 Plug with 5 m cable				KL3186
M8 Plug with 10 m cable				KL3217
M8 Plug with 15 m cable				KL3216

* M8 Connector, snap in, 3-pole,
 ** M8R Connector, lock nut, 3-pole
 *** FL flying leads

Position Measuring System SFI-plus



Displacement Measuring System

for automated movement

ORIGA-Sensoflex

(Incremental Displacement Measuring System)

Series SFI-plus

- **OSP-E..SB**
Ball screw actuator with internal plain bearing guide
- **OSP-E..ST**
Trapezoidal screw actuator with internal plain bearing guide

Special properties:

- contactless, magnetic displacement measuring system
- freely selectable displacement length up to 32 m
- resolution 0,1 mm
- displacement speed up to 10 m/s
- suited for linear and gyratory movements
- for almost all control and display units with suitable counter input


The magnetic displacement measuring system SFI-plus consists of 2 main components:

- **Measuring scale**
self-adhesive, magnetic measuring scale
- **Sensing head**
converts the magnetic poles into electric signals which are then processed by counter inputs downstream (e.g. PLC, PC, digital counters)



Characteristics		
Characteristics	Unit	Description
Type		21210
Output function		
Resolution	mm	0.1
Pole length scale	mm	5
Max. speed	m/s	10
Repeating accuracy		± 1 increment
Distance sensor/scale mm		≤ 4
Tangential deviation	≤ 5°	
Possible lateral deviation	mm	≤ ± 1.5
Switching output		PNP
Electric Characteristics		
Operating voltage U _b	V DC	18 – 30
Voltage drop	V	≤ 2
Continuous current per output	mA	≤ 20
Power consumption at U _b = 24V, switched on, no-load	mA	≤ 50
Short-circuit protection		yes
Reverse voltage protection		yes
Protection against inductive switch-off peak		yes
Power-up pulse suppression		yes
EMC		
Electrostatic discharge	kV	6, B, according to EN 61000-4-2
Electromagnetic field	V/m	10, A, according to EN61000-4-3
Fast transients signals, burst (signal connections)	kV	1, B, according to EN 61000-4-4
Fast transients signals, burst (DC-connections)	kV	2, B, according to EN 61000-4-4
EMC immunity, surge (signal-connections)	kV	1, B, according to EN 61000-4-5
EMC immunity, surge (DC-connections)	kV	0,5, B, according to EN 61000-4-5
HF cable fed	V	10, A, according to EN 61000-4-6
Magnetic field at 50 Hz	A/m	30, A, according to EN 61000-4-8
Radio frequency interference		according to EN 61000-6-4
Radiated disturbances		according to EN 55011, group 1, A
Mechanical parameters		
Housing		Aluminium
Cable length	m	5.0 – fixed, open end
Cable cross-section	mm ²	4 x 0.14
Type of cable		PUR, black
Bending radius	mm	≥ 36
Weight (mass)	kg	approx. 0.165
Ambient conditions/shock resistance		
Encapsulation class	IP	67 according to EN60529
Ambient temperature range		°C -25 to +80
Broad band noise according to EN 60068-2-64	g	5.5 Hz to 2 kHz, 0.5 h per axis
Vibration according to EN 60068-2-6	g	12, 10 Hz to 2 kHz, 2 mm, 5 h per axis
Shock acc. EN 60068-2-27	g	100, 6 ms, 50 shocks per axis
Continuous shock according to EN 60068-2-29	g	5, 2 ms, 8000 shocks per axis

Dimensions [mm] – Reading Head

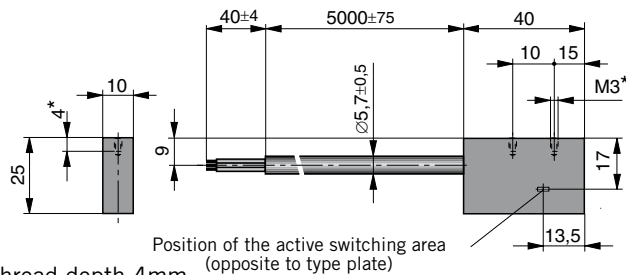

* Max. thread depth 4mm

Signal curve – sensing head OUT

$U_a = U_e$	Phase B	U_{a1}	0°	
	Phase A	U_{a2}	90°	


Sensing head

The sensing head supplies two pulsating, 90° out of phase counter signals (phase A/B) with a resolution of 0,4 mm (option 4 mm). External pulse edge control can improve the resolution to 0.1 mm (option 1 mm). The counting direction automatically results from the phase shift of the counter signal.

Electric connection

colour	Designation
bn = brown	+ DC
bl = blue	- DC
bk = black	phase A
wt = white	phase B

Dimensions – in combination with OSP-E actuators

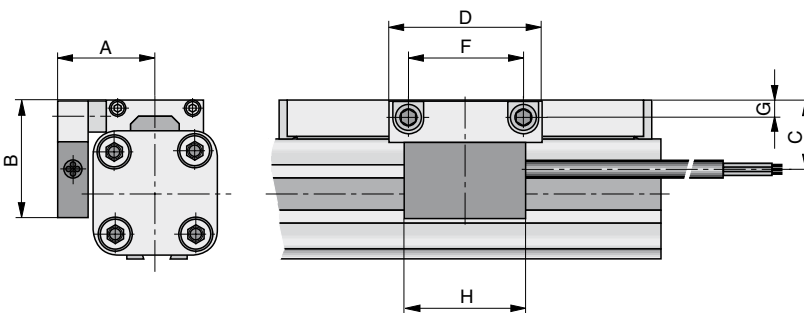

Dimension Table [mm]

Series	A	B	C	D	F	G	H
OSP-E25SB, ST	32	39	23	50	38	5.5	40
OSP-E32SB, ST	37.5	46	30	50	38	6.5	40
OSP-E50SB, ST	49.5	55	39	50	38	6.5	40

Order Instructions

Description	Order No.
Sensing head with measuring scale – resolution 0.1 mm (please indicate scale length)	21240
Sensing head - resolution 0.1 mm (spare part)	21210
Measuring scale per meter for (to be replaced)	21235
Mounting kit for OSP-P25	21213
Mounting kit for OSP-P32	21214
Mounting kit for OSP-P50	21216

* The overall length of the measuring scale results from the dead length of the actuator and the stroke length. For dead lengths for actuators of series OSP-E see table.

Series	Dead Lengths (mm)
OSP-E25SB, ST	154
OSP-E32SB, ST	196
OSP-E50SB, ST	280

Example:

Actuator OSP-E, $\varnothing 25$ mm, stroke 1000 mm

Dead length + stroke = overall length of the measuring scale
154 mm + 1000mm = 1154 mm

SFI-plus in connection with electric actuators of series OSP-E..ST

The SFI-plus can be mounted directly to the electric actuator of series OSP-E..ST by means of a special mounting kit. The position of the sensing head is generally staggered by 90° to the carrier.

For later installation a corresponding carrier kit with threaded holes can be ordered.

SFI-plus in connection with electric actuators of series OSP-E..SB

The displacement measuring system in connection with series OSP-E..SB can only be retrofitted, if the system is reconditioned by the manufacturer.



Order Instructions	
Description	Order No.
Sensing head with measuring scale – resolution 0.1 mm (please indicate scale length)	21240
Sensing head - resolution 0.1 mm (spare part)	21210
Measuring scale per meter for (to be replaced)	21235
Mounting kit for OSP-P25	21213
Mounting kit for OSP-P32	21214
Mounting kit for OSP-P50	21216

* The overall length of the measuring scale results from the dead length of the actuator and the stroke length.
For dead lengths for actuators of series OSP-E see table.

Series	Dead lengths [mm]
OSP-E25SB, ST	154
OSP-E32SB, ST	196
OSP-E50SB, ST	280

Example:

Actuator OSP-E, Ø25 mm,
stroke 1000 mm

Dead length + stroke = overall length of the measuring scale
154 mm + 1000 mm = 1154 mm

Cable Cover



Cable Cover


Size 20, 25, 32, 50




For clean guidance of magnetic switch cables along the cylinder body.
Contains a maximum of 3 cables with diameter 3 mm.

Material: Plastic
Colour: Red
Temperature Range: -10 bis +80°C

Series OSP-E..B, ..SB, ..ST, ..SBR, ..STR – Dimensions [mm]

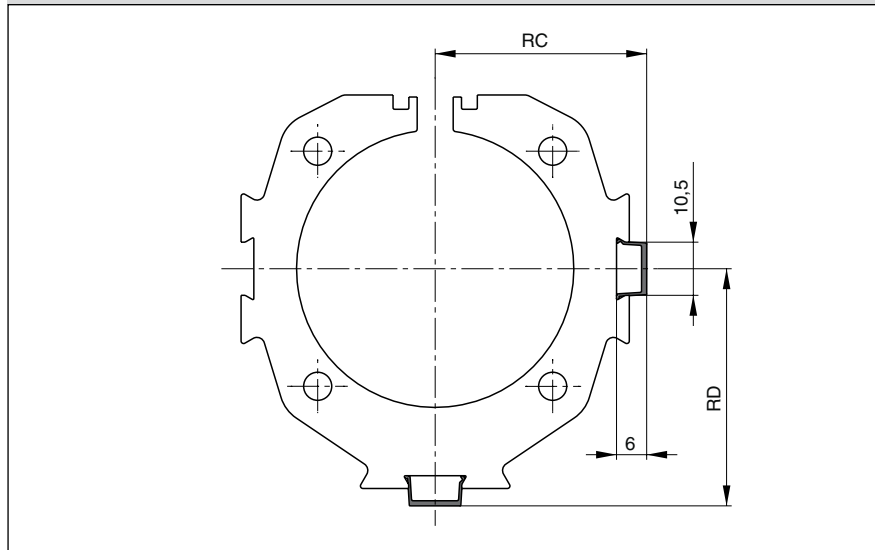

Series OSP-E..BHD – Dimensions [mm]

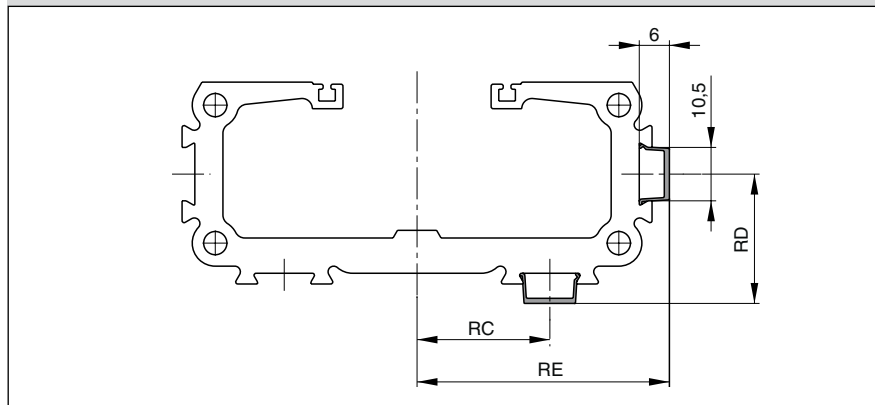

Dimension Table [mm] and Order Instructions

for Series	RC	RD	RE	Order No.
OSP-E25 *	23.5	25.5	–	13039 Minimum length: 1m Max. profile length: 2m Multiple profiles can be used.
OSP-E32 *	29.5	32.0	–	
OSP-E50 *	41.5	46.5	–	
OSP-E20BHD	23.0	25.0	40	
OSP-E25BHD	26.0	25.5	49.5	
OSP-E32BHD	32.0	32.0	61.5	
OSP-E50BHD	44.0	46.5	85.5	

* B, SB, ST, SBR, STR

OSP-E Multi-Axis Connections for Electric Actuators



Contents

Description	Page
Overview	179
Adapter plates	181
Intermediate Drive Shafts	191

MULTI-AXIS CONNECTION SYSTEM – SIMPLIFIES ENGINEERING AND INSTALLATION

A completely new system for easy connection of OSP-E actuators in multi-axis systems.

MULTI-AXIS CONNECTIONS


With this highly adaptable system for connection of actuators in multi-axis arrangements, Parker Origa offers design engineers complete flexibility. A wide range of adapter plates, profile mountings and intermediate drive shafts simplify engineering and installation.

The connection system enables actuators to be mounted in carrier to carrier, carrier to profile, carrier to end cap mounting, carrier to end cap.

Developed for the heavy-duty belt drive series OSP-E..BHD, the system provides cross-connection with the same series and also other actuator series in the ORIGA SYSTEM PLUS range.



MULTI-AXIS CONNECTION SYSTEM

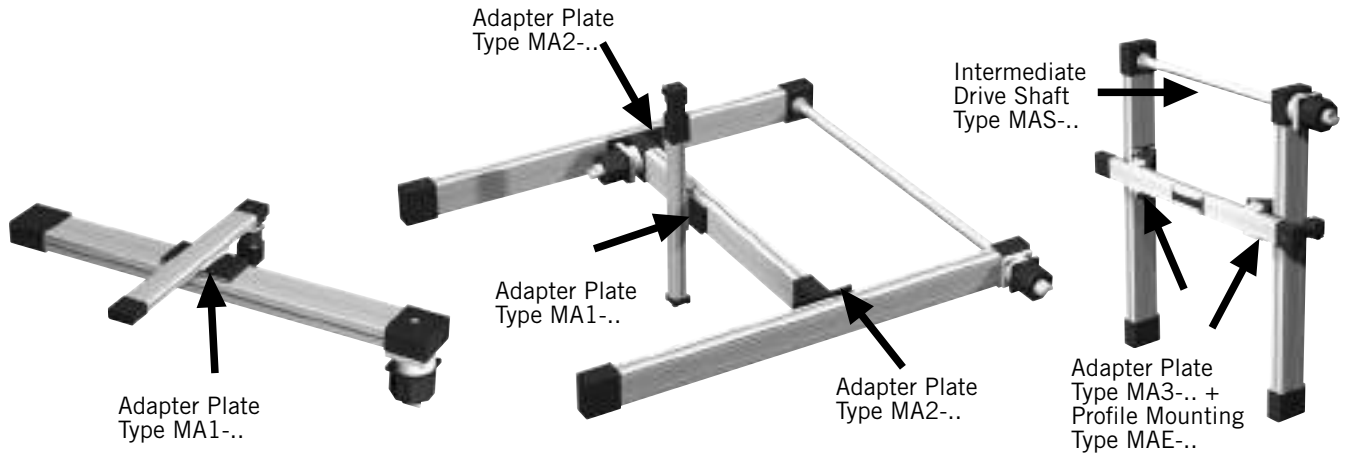


* For available standard combinations, see page 170.

<p>Adapter Plate Type MA1-..*</p> <p>For connecting carrier to carrier, carrier to profile mounting or carrier to end cap mounting.</p>	<p>Combination C*</p>	<p>Combination P*</p>	<p>Combination EM*</p>
	<p>Combination C*</p>	<p>Combination P*</p>	<p>Combination EM*</p>
<p>Adapter Plate Type MA2-..*</p> <p>For connecting carrier to end cap.</p>	<p>Combination E*</p>	<p>Combination E*</p>	<p>Combination E*</p>
	<p>Combination P*</p>	<p>Combination P*</p>	
<p>Adapter Plate Type MA3-..*</p> <p>For connecting 90° carrier to profile mounting or carrier to end cap mounting.</p>	<p>Combination EM*</p>	<p>Combination EM*</p>	
<p>Profile Mounting Type MAE-..</p>			
<p>Intermediate Drive Shaft Type MAS-..</p>			

AVAILABLE MOUNTING COMBINATIONS

Available Mounting Combinations

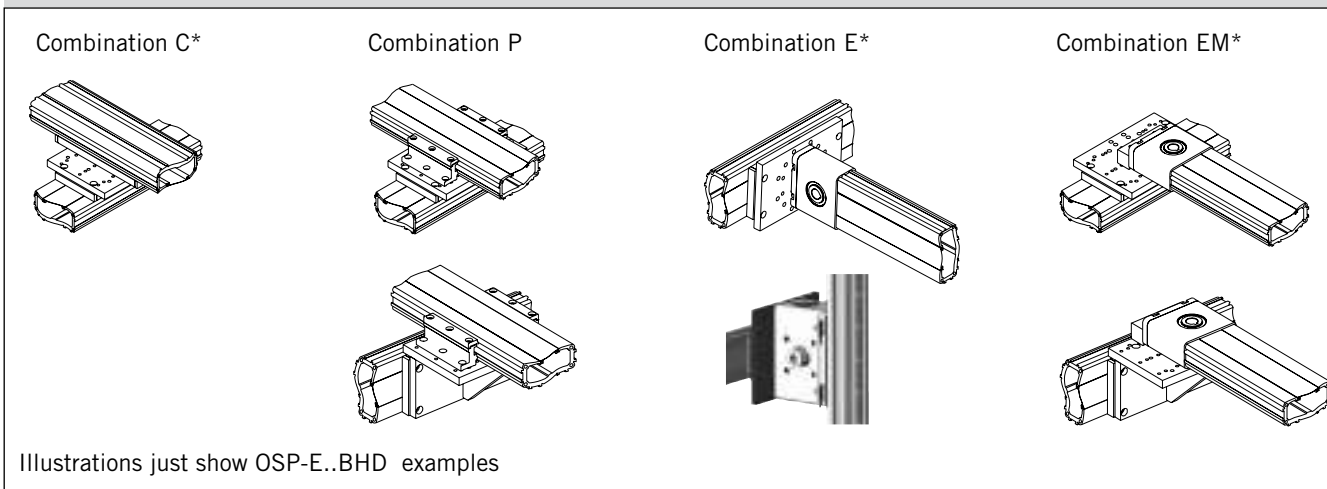

Series	Type	25BHD				32BHD				50BHD				25BV				25B/SB/ST				32B/SB/ST				50B/SB/ST			
		C ¹	P ²	E ³	EM ⁴	C ⁵	P ⁶	E ⁷	EM ⁸	C ⁹	P ¹⁰	E ¹¹	EM ¹²	E ¹¹	C ¹³	P ¹⁴	E ¹⁵	EM ¹⁶	C ¹⁷	P ¹⁸	E ¹⁹	EM ²⁰	C ²¹	P ²²	E ²³	EM ²⁴			
OSP-E25BHD	MA1-25	X	X		X	X	X		X						X	X		X	X	X	X	X	X	X	X	X	X		
OSP-E32BHD	MA1-32	X	X		X	X	X		X	X	X		X						X	X		X	X	X	X	X	X		
OSP-E50BHD	MA1-50	X	X		X	X	X		X	X	X		X						X				X	X		X			
OSP-E25BHD	MA2-25			X				X																		X			
	MA2-32												X																
OSP-E32BHD	MA2-32			X				X				X		X												X			
OSP-E50BHD	MA2-50			X				X				X		X												X			
OSP-E25BHD	MA3-25		X		X		X		X						X		X		X		X		X	X	X	X			
OSP-E32BHD	MA3-32		X		X		X		X		X		X						X		X		X	X	X	X			
OSP-E50BHD	MA3-50		X		X		X		X		X		X										X	X	X	X			

Abbreviations:

- C** = MAn to Carrier,
- P** = MAn to Profile mounting,
- E** = MAn to End cap,
- EM** = MAn to End cap mounting (n=1,2,3)

* For type OSP-E..SBR / ..STR only combination P is available.


Values in superscript refer to corresponding adapter plate dimensions on page 167 ff.

e.g. Dimensions corresponding to combination option „C“ for adapter plate MA1-50 connected to an OSP-E32BHD carrier are shown with Superscript number 5 on the MA1-50 adapter plate page 167 ff.

Other combinations on request.

For Actuators see page 11 ff, 27 ff, 39 ff, 43 ff, 53 ff, 67 ff, 79 ff

Dimensions [mm] Adapter Plate Type MA1-25

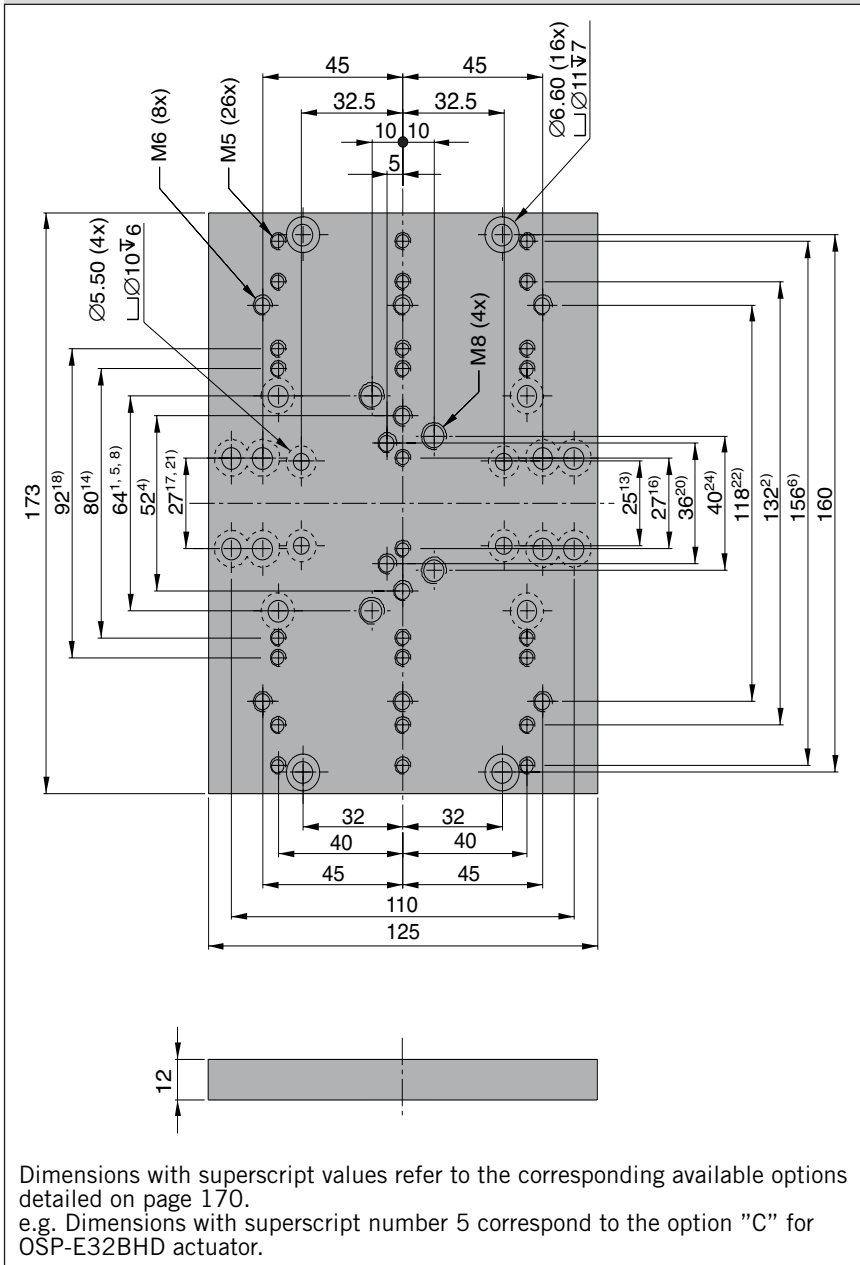

Adapter Plate for OSP-E25



Type: MA1-25

Order Instructions and Weight		
Description	Weight(mass) [kg]	Order -No.
Adapter Plate Type MA1-25	0.7	12269




For **Actuators** see page 11 ff, 27 ff, 39 ff, 43 ff, 53 ff, 67 ff, 79 ff

Adapter Plate for OSP-E32



Type: MA1-32

Dimensions [mm] Adapter Plate Type MA1-32

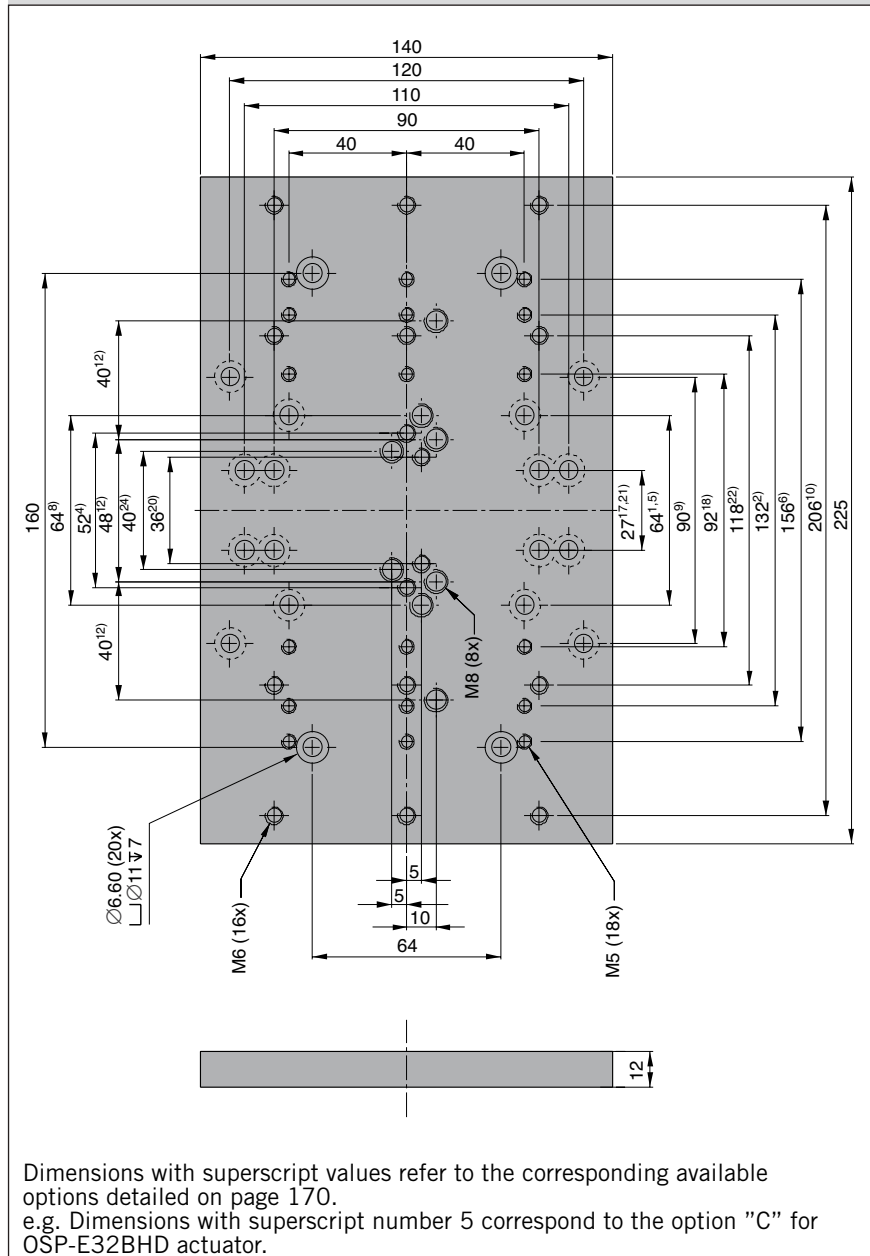

Dimensions with superscript values refer to the corresponding available options detailed on page 170.
e.g. Dimensions with superscript number 5 correspond to the option "C" for OSP-E32BHD actuator.


Order Instructions and Weight

Description	Weight (mass) [kg]	Order No.
Adapter Plate Type MA1-32	1.0	12272



For **Actuators** see page 11 ff, 27 ff, 39 ff, 43 ff, 53 ff, 67 ff, 79 ff

Dimensions [mm Adapter Plate Type MA1-50]

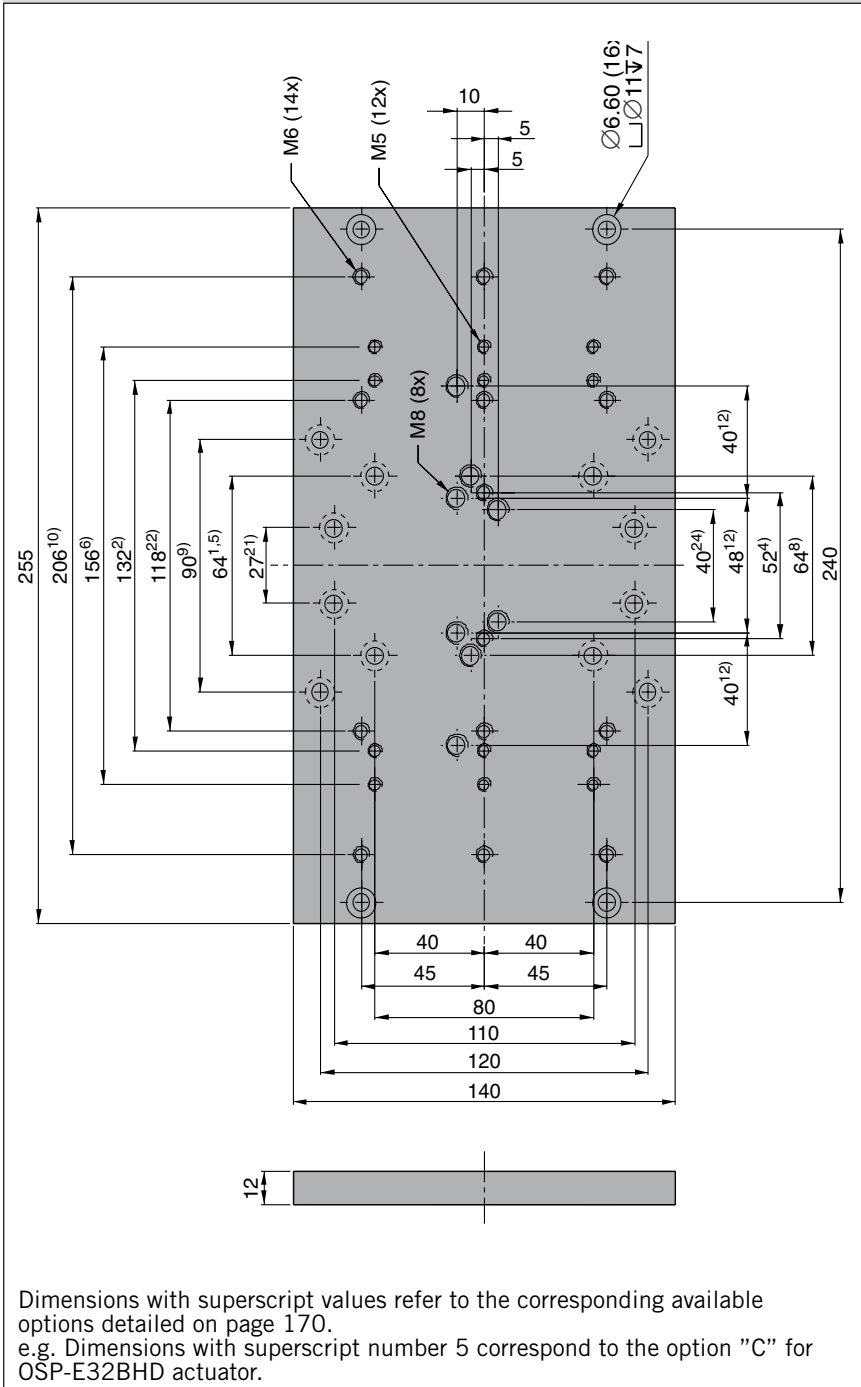

Adapter Plate for OSP-E50



Type: MA1-50

Order Instructions and Weight		
Description	Weight (mass) [kg]	Order No.
Adapter Plate Type MA1-50	1.1	12275




For **Actuators** see page 11 ff, 27 ff, 39 ff, 43 ff, 53 ff, 67 ff, 79 ff

Adapter Plate for OSP-E25



Type: MA2-25

Dimensions [mm] Adapter Plate Type MA2-25

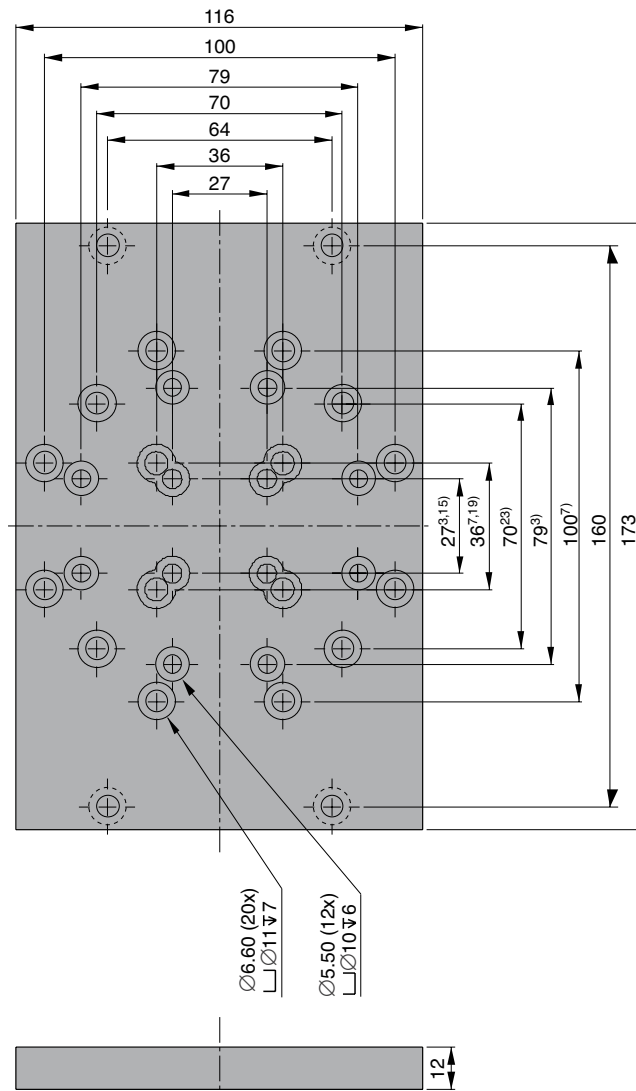

Dimensions with superscript values refer to the corresponding available options detailed on page 170.
e.g. Dimensions with superscript number 5 correspond to the option "C" for OSP-E32BHD actuator.


Order Instructions and Weight

Description	Weight (mass) [kg]	Order No.
Adapter Plate Type MA2-25	0.6	12270



For **Actuators** see page 11 ff, 27 ff, 39 ff, 43 ff, 53 ff, 67 ff, 79 ff

Dimensions [mm] Adapter Plate Type MA2-32

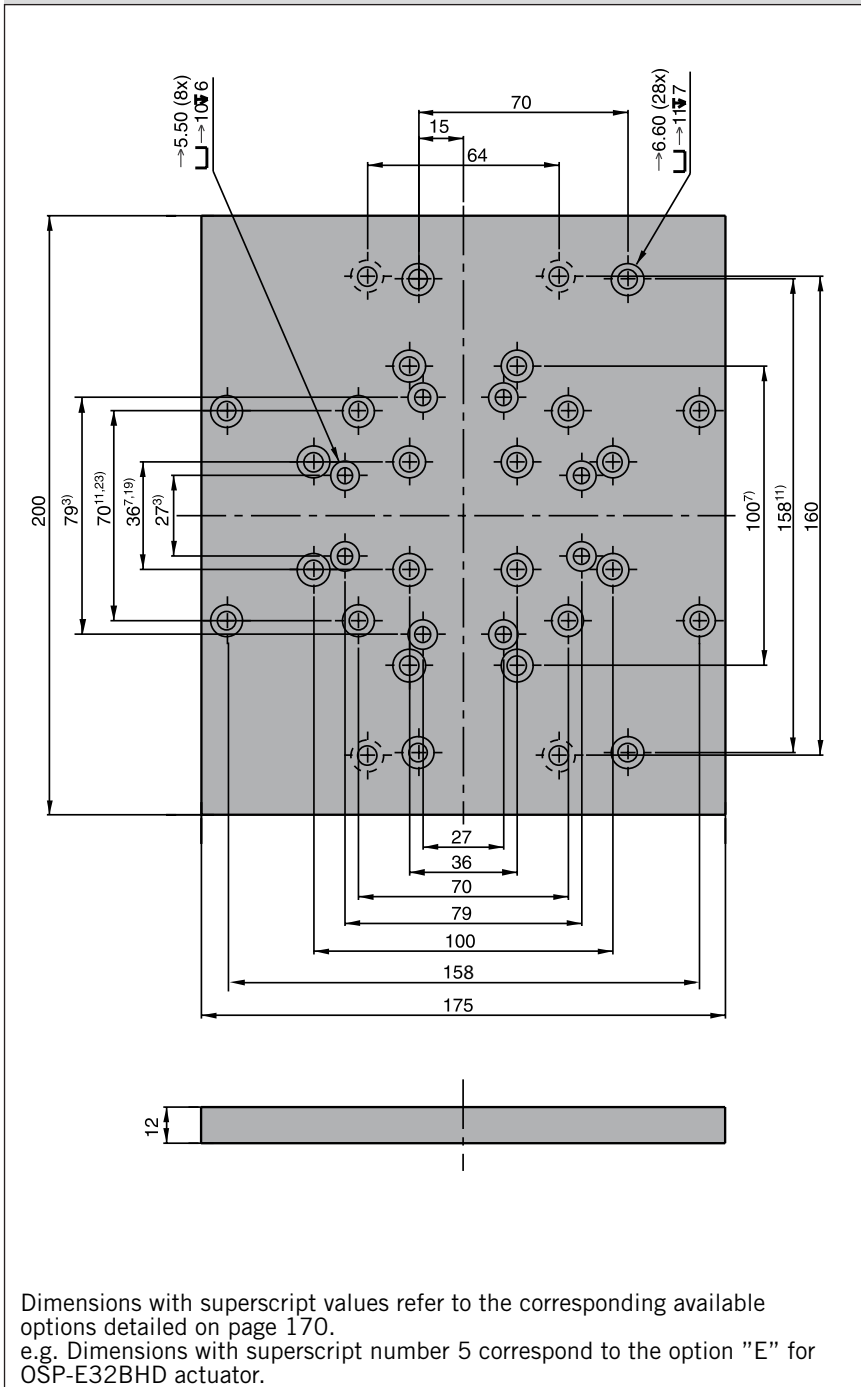

Dimensions with superscript values refer to the corresponding available options detailed on page 170.
 e.g. Dimensions with superscript number 5 correspond to the option "E" for OSP-E32BHD actuator.

Adapter Plate for OSP-E32



Type: MA2-32

Order Instructions and Weight

Description	Weight (mass) [kg]	Order No.
Adapter Plate Type MA2-32	1.1	12273




For **Actuators** see page 11 ff, 27 ff, 39 ff, 43 ff, 53 ff, 67 ff, 79 ff

Adapter Plate for OSP-E50



Type: MA2-50

Dimensions [mm] Adapter Plate Type MA2-50

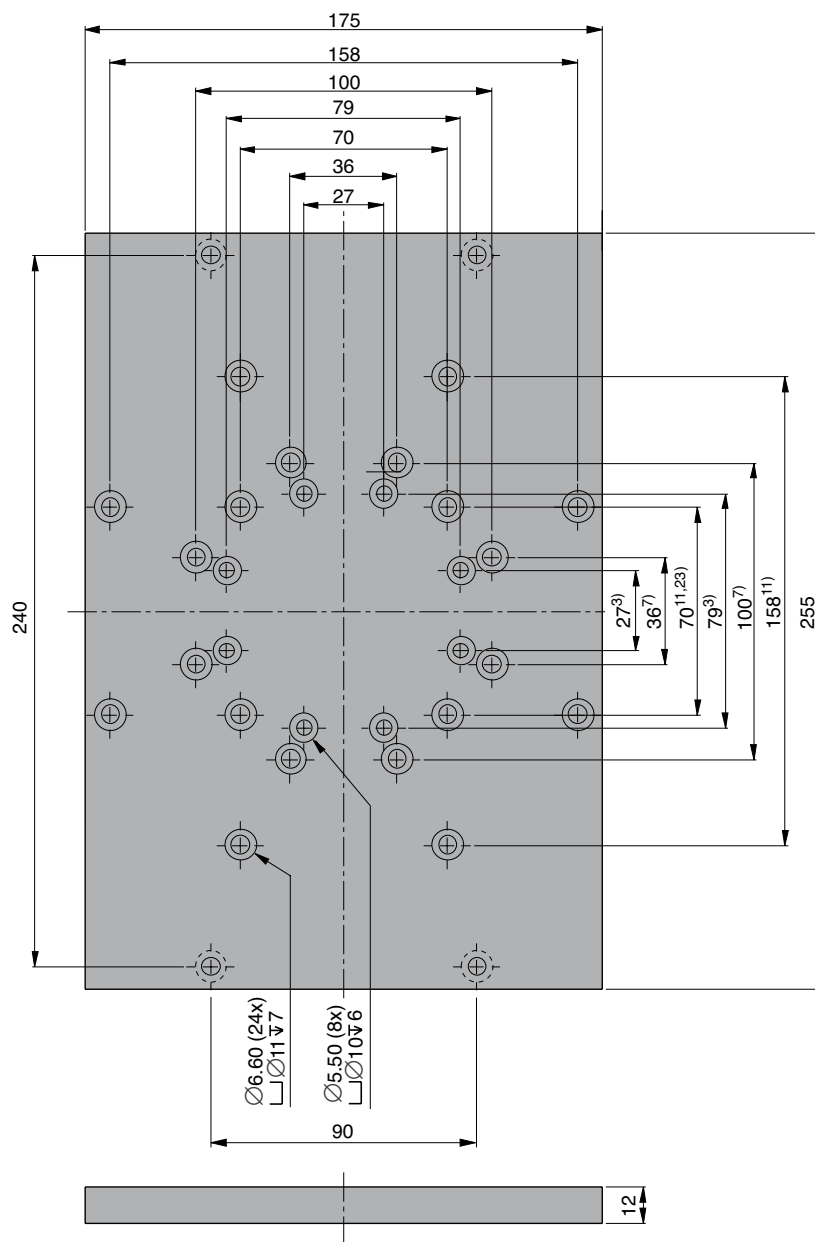

Dimensions with superscript values refer to the corresponding available options detailed on page 170.
e.g. Dimensions with superscript number 5 correspond to the option "E" for OSP-E32BHD actuator.


Order Instructions and Weight

Description	Weight (mass) [kg]	Order No.
Adapter Plate Type MA2-50	1.4	12276



For **Actuators** see page 11 ff, 27 ff, 39 ff, 43 ff, 53 ff, 67 ff, 79 ff

Dimensions [mm] Adapter Plate Type MA3-25

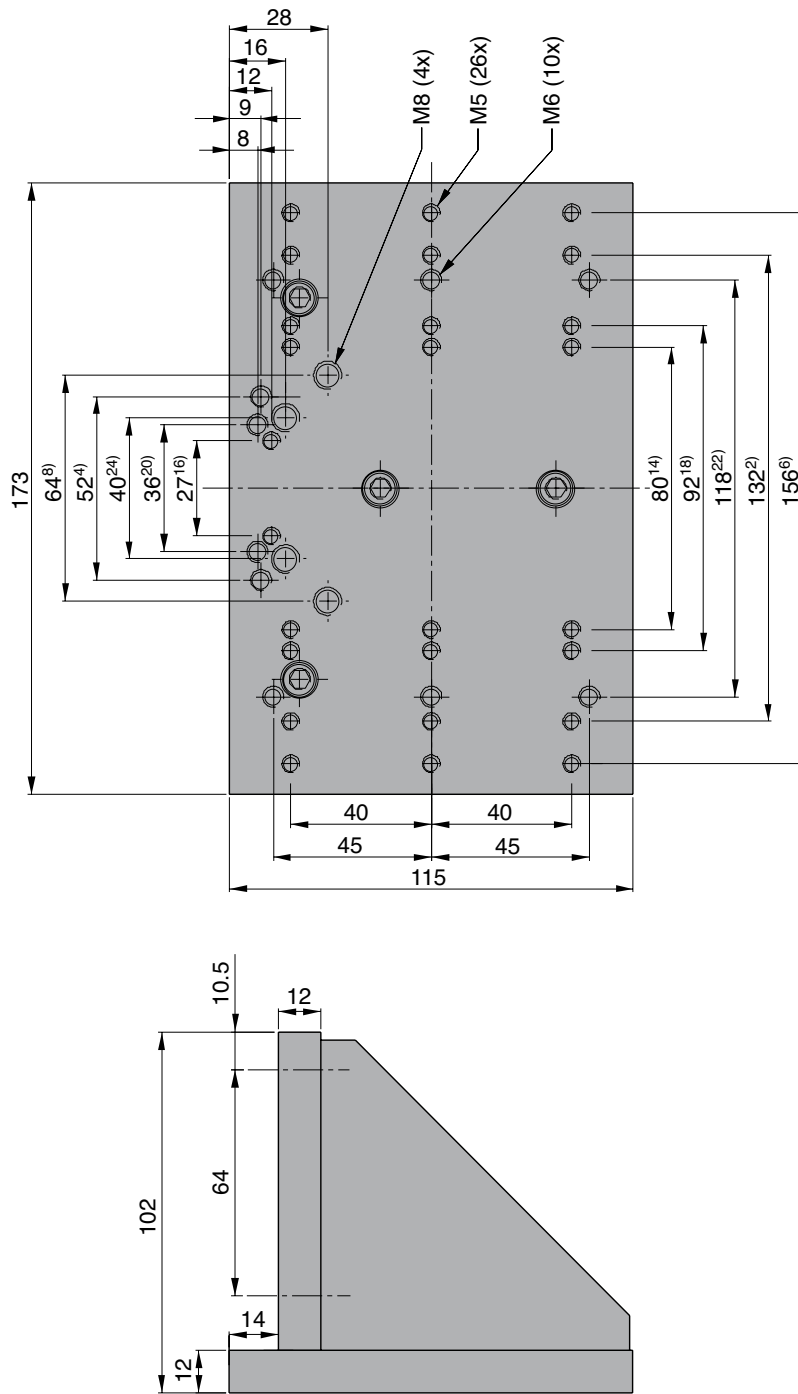

Dimensions with superscript values refer to the corresponding available options detailed on page 170. e.g. Dimensions with superscript number 5 correspond to the option "EM" for OSP-E32BHD actuator.

Adapter Plate for OSP-E25



Type: MA3-25

Order Instructions and Weight

Description	Weight(mass) [kg]	Order No.
Adapter Plate Type MA3-25	1.3	12271

For **Actuators** see page 11 ff, 27 ff, 39 ff, 43 ff, 53 ff, 67 ff, 79 ff




Adapter Plate for OSP-E32



Type: MA3-32

Dimensions [mm Adapter Plate Type MA3-32

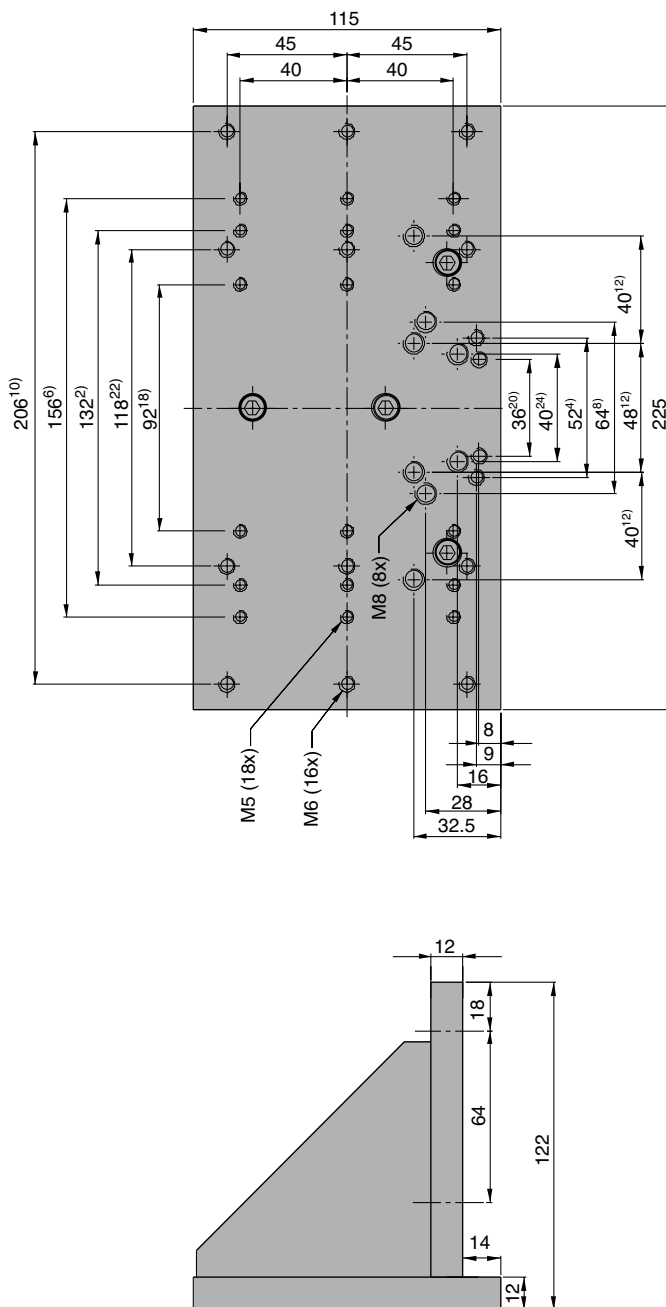

Dimensions with superscript values refer to the corresponding available options detailed on page 170.
e.g. Dimensions with superscript number 5 correspond to the option "EM" for OSP-E32BHD actuator.




Order Instructions and Weight

Description	Weight (mass) [kg]	Order No.
Adapter Plate Type MA3-32	1.8	12274

For **Actuators** see page 11 ff, 27 ff, 39 ff, 43 ff, 53 ff, 67 ff, 79 ff

Dimensions [mm] Adapter Plate Type MA3-50

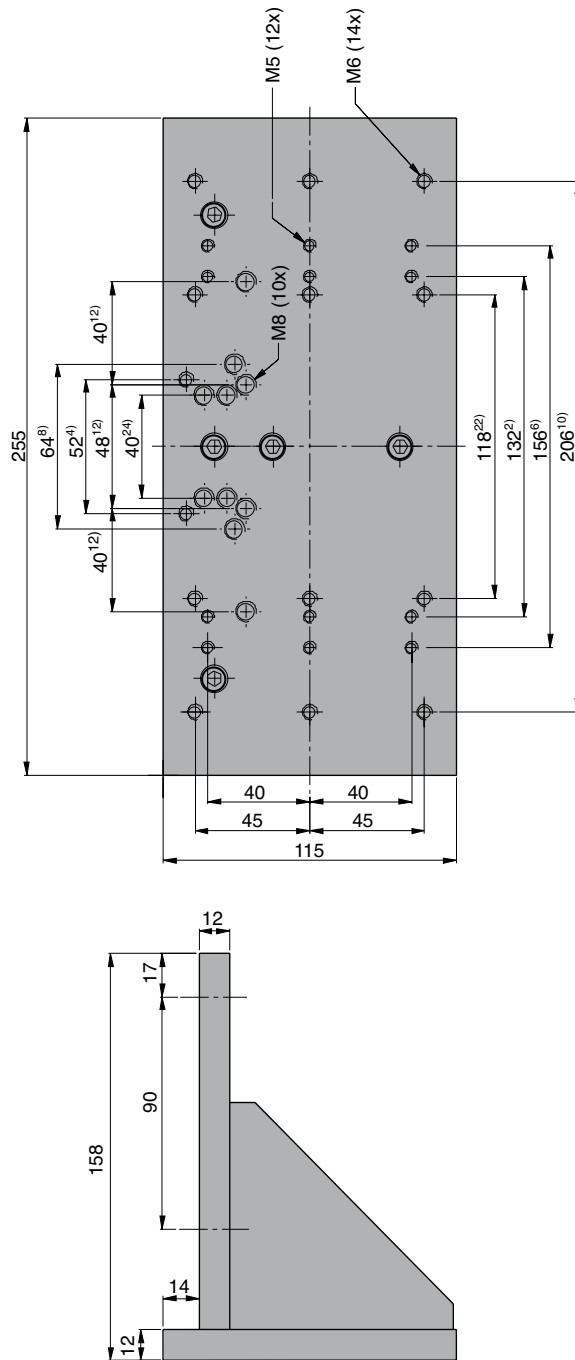

Dimensions with superscript values refer to the corresponding available options detailed on page 170.
e.g. Dimensions with superscript number 4 correspond to the option "EM" for OSP-E25BHD actuator.

Adapter Plate for OSP-E50



Type: MA3-50




Order Instructions and Weight


Description	Weight (mass) [kg]	Order No.
Adapter Plate Type MA3-50	2.3	12277

For **Actuators** see page 11 ff, 27 ff, 39 ff, 43 ff, 53 ff, 67 ff, 79 ff


Intermediate Drive Shaft with Clamp Shaft
Series OSP-E20BHD to E50BHD, Type MAS-..

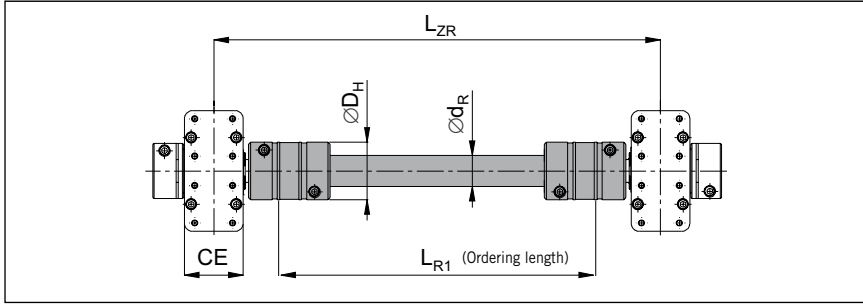

Intermediate Drive Shaft with Plain Shaft and Keyway
Series OSP-E20BHD to E50BHD, Type MAS-..

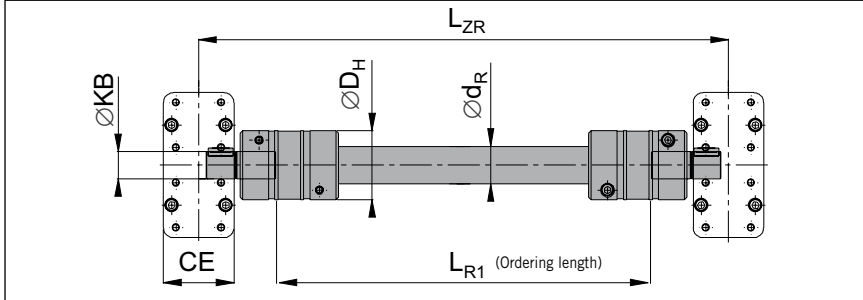

Critical Speed v. for Coupling Length

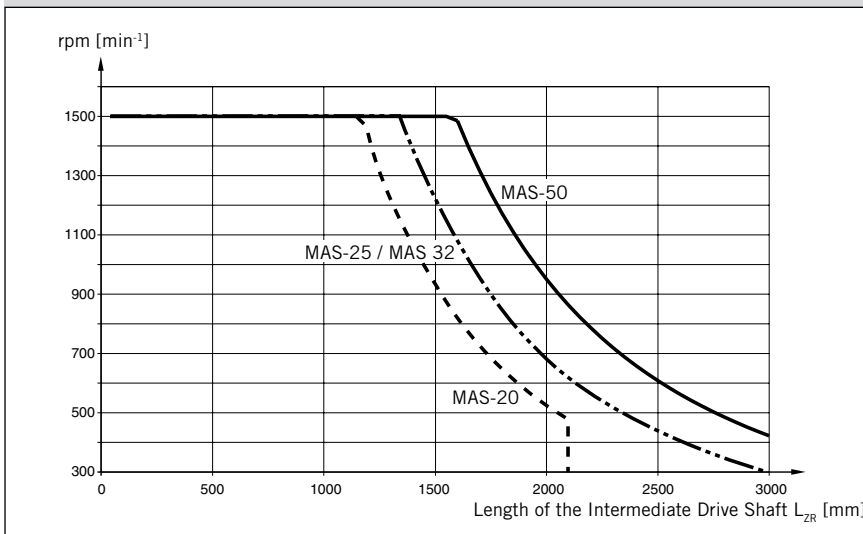

Multi-Axis-System Accessories

Complete Intermediate Drive Shaft

Size 25, 32, 50



for Actuator
• Series OSP-E..BHD

Note:
For Series OSP-E..BHD with integrated gearbox, please contact your local Parker Origa technical support.


For other series on request.

Features:

- Backlash-free shaft connection under pre-stress
- Design up to speed 1500 rpm
- Intermediate Drive Shaft with double coupling for larger displacements of parallel actuators
- Easy to mount

Material:

Aluminium (AL-H) / Steel (St-H)
Polyurethane/Hytrell

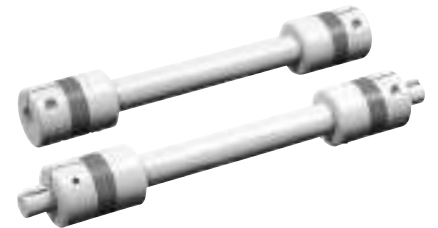

Characteristics / Dimension Table [mm] and Order No.

Series	Type	Max. Torque- [Nm] **	CE	D _H	KB***	L _{ZR}	L _{R1}	d _R	Order No. *	
									For Clamp Shaft	For Hollow Shaft
OSP-E20BHD	MAS-20	28	38	40	12 _{K6}	< 2100	L _{ZR} -98	20 x 3.0	16256- ...	16257- ...
OSP-E25BHD	MAS-25	39	42	55	16 _{K6}	< 3000	L _{ZR} -112	25 x 2.5	12305- ...	12281- ...
OSP-E32BHD	MAS-32	42	56	55	22 _{K6}	< 3000	L _{ZR} -126	25 x 2.5	12306- ...	12282- ...
OSP-E50BHD	MAS-50	102	87	65	32 _{K6}	< 3000	L _{ZR} -167	35 x 4.0	12307- ...	12283- ...

* Complete with L_{R1} Length in mm.
Example: 12305-1200
(Length L_{R1} = 1200 mm)

** For higher torque requirement, please contact your local Parker Origa technical support

*** Other dimensions for KB on request.

Mounting Dimensions for Motor and Gears							
Code	Description	A	B*	D	E	F	G
for motor and gears with clearance mounting holes							
A0	SY563T	66,50	M4	38,10	2,50	6,35	21,00
A1	SY873T	99,00	M6	73,00	3,00	9,52	31,50
A2	SMx60 xx xxx 8 11 ...	63,00	M5	40,00	2,50	11,00	23,00
A3	SMx82 xx xx 8 14 ...	100,00	M6	80,00	3,50	14,00	30,00
A4	SMx100 xx xx 5 19...	115,00	M8	95,00	3,50	19,00	40,00
A5	SMx115 xx xx 5 24... / SMx142 xx xx 5 24...	165,00	M10	130,00	3,50	24,00	50,00
A6	SMx115 xx xx 5 28... / SMx142 xx xx 5 28...	165,00	M10	130,00	3,50	28,00	60,00
A7	PS60	70,00	M5	50,00	11,00	16,00	40,00
A8	PS90	100,00	M6	80,00	15,00	22,00	52,00
A9	PS115	130,00	M8	110,00	16,00	32,00	68,00
for gears with threaded mounting holes							
C0	LP050 / PV40-TA	44,00	S4	35,00	6,50	12,00	24,50
C1	LP070 / PV60-TA	62,00	S5	52,00	8,00	16,00	36,00
C2	LP090 / PV90-TA	80,00	S6	68,00	10,00	22,00	46,00
C3	LP120	108,00	S8	90,00	12,00	32,00	70,00
* size of thread (e.g. M4) or counter bore (e.g. S4) used to mount motor or gear to the flange plate							

Parker Worldwide

Europe, Middle East, Africa

AE – United Arab Emirates, Dubai

Tel: +971 4 8127100
parker.me@parker.com

AT – Austria, Wiener Neustadt

Tel: +43 (0)2622 23501-0
parker.austria@parker.com

AT – Eastern Europe, Wiener Neustadt

Tel: +43 (0)2622 23501 900
parker.easteurope@parker.com

AZ – Azerbaijan, Baku

Tel: +994 50 2233 458
parker.azerbaijan@parker.com

BE/LU – Belgium, Nivelles

Tel: +32 (0)67 280 900
parker.belgium@parker.com

BY – Belarus, Minsk

Tel: +375 17 209 9399
parker.belarus@parker.com

CH – Switzerland, Etoy

Tel: +41 (0)21 821 87 00
parker.switzerland@parker.com

CZ – Czech Republic, Klecany

Tel: +420 284 083 111
parker.czechrepublic@parker.com

DE – Germany, Kaarst

Tel: +49 (0)2131 4016 0
parker.germany@parker.com

DK – Denmark, Ballerup

Tel: +45 43 56 04 00
parker.denmark@parker.com

ES – Spain, Madrid

Tel: +34 902 330 001
parker.spain@parker.com

FI – Finland, Vantaa

Tel: +358 (0)20 753 2500
parker.finland@parker.com

FR – France, Contamine s/Arve

Tel: +33 (0)4 50 25 80 25
parker.france@parker.com

GR – Greece, Athens

Tel: +30 210 933 6450
parker.greece@parker.com

HU – Hungary, Budapest

Tel: +36 1 220 4155
parker.hungary@parker.com

IE – Ireland, Dublin

Tel: +353 (0)1 466 6370
parker.ireland@parker.com

IT – Italy, Corsico (MI)

Tel: +39 02 45 19 21
parker.italy@parker.com

KZ – Kazakhstan, Almaty

Tel: +7 7272 505 800
parker.easteurope@parker.com

NL – The Netherlands, Oldenzaal

Tel: +31 (0)541 585 000
parker.nl@parker.com

NO – Norway, Asker

Tel: +47 66 75 34 00
parker.norway@parker.com

PL – Poland, Warsaw

Tel: +48 (0)22 573 24 00
parker.poland@parker.com

PT – Portugal, Leca da Palmeira

Tel: +351 22 999 7360
parker.portugal@parker.com

RO – Romania, Bucharest

Tel: +40 21 252 1382
parker.romania@parker.com

RU – Russia, Moscow

Tel: +7 495 645-2156
parker.russia@parker.com

SE – Sweden, Spånga

Tel: +46 (0)8 59 79 50 00
parker.sweden@parker.com

SK – Slovakia, Banská Bystrica

Tel: +421 484 162 252
parker.slovakia@parker.com

SL – Slovenia, Novo Mesto

Tel: +386 7 337 6650
parker.slovenia@parker.com

TR – Turkey, Istanbul

Tel: +90 216 4997081
parker.turkey@parker.com

UA – Ukraine, Kiev

Tel: +380 44 494 2731
parker.ukraine@parker.com

UK – United Kingdom, Warwick

Tel: +44 (0)1926 317 878
parker.uk@parker.com

ZA – South Africa, Kempton Park

Tel: +27 (0)11 961 0700
parker.southafrica@parker.com

North America

CA – Canada, Milton, Ontario

Tel: +1 905 693 3000

US – USA, Cleveland

Tel: +1 216 896 3000

Asia Pacific

AU – Australia, Castle Hill

Tel: +61 (0)2-9634 7777

CN – China, Shanghai

Tel: +86 21 2899 5000

HK – Hong Kong

Tel: +852 2428 8008

IN – India, Mumbai

Tel: +91 22 6513 7081-85

JP – Japan, Tokyo

Tel: +81 (0)3 6408 3901

KR – South Korea, Seoul

Tel: +82 2 559 0400

MY – Malaysia, Shah Alam

Tel: +60 3 7849 0800

NZ – New Zealand, Mt Wellington

Tel: +64 9 574 1744

SG – Singapore

Tel: +65 6887 6300

TH – Thailand, Bangkok

Tel: +662 717 8140

TW – Taiwan, Taipei

Tel: +886 2 2298 8987

South America

AR – Argentina, Buenos Aires

Tel: +54 3327 44 4129

BR – Brazil, Sao Jose dos Campos

Tel: +55 12 4009 3500

CL – Chile, Santiago

Tel: +56 2 623 1216

MX – Mexico, Apodaca

Tel: +52 81 8156 6000

VE – Venezuela, Caracas

Tel: +58 212 238 5422

Parker Hannifin GmbH

Origa Division Europe

Industriestraße 8

70794 Filderstadt, Germany

Tel: +49 (0)7158 1703-0

Fax: +49 (0)7158 64870

E-Mail: info-origa-de@parker.com

www.parker-origa.com

www.parker.com

